


## RINGS & BASES INDEX

Fitting & Custom Components . . .	268-269	Rifle . . . . .	251-268
Handgun . . . . .	249-250	Shotgun . . . . .	250-251


### WEIGAND COMBAT HANDGUN SCOPEMOUNTS®


#### TAURUS TRACKER SCOPE MOUNT

Precision-machined, aluminum scope mount accepts Weaver-style rings to let you mount a scope on your Taurus Tracker. Also great for red-dot optics. Integral recoil lug fits into rear sight notch for a rock solid hold that prevents scope movement. Requires removing rear sight. No drilling or tapping required. 


**SPECS:** Aluminum, silver, matte finish. 4 1/2" (11.4cm) long, 3/16" (7.8mm) high from bottom to top of mount. 1.3 oz. (36.8g) weight. Includes mounting screws. Fits .22 LR, .22 Mag, .17 HMR.

**#957-000-076AT Tracker Scope Mount, 7E26N87 . . . \$ 29.99**

**ANACONDA/PYTHON/KING COBRA DRILL & TAP MOUNT** - Large, contoured lug fits in place of the rear sight and prevents base movement under recoil. Fits factory drilled and tapped (three hole) Anacondas and current Pythons. Accepts Weaver-style rings. 

**SPECS:** Aluminum, anodized, natural silver finish. 4 1/2" (11cm) long, 1/8" (22mm) wide, 1.7 oz. (48 g) wt. Installation requires drilling and tapping of frame. Includes screws and instructions. 

**#957-107-101AT Silver Anaconda Mount, 7E31C03 . . . \$ 34.99**


**REDHAWK 6" & 7 1/2" BARREL** - Strong, lightweight mounts available for Ruger Redhawk models with 6" or 7 1/2" barrels. Remove rear sight for installation, no drilling or tapping required. Uses a front sight replacement block for attachment at the muzzle end and the rear sight elevation hole for attachment at the back of the top strap. Rear sight notch becomes a rock-solid recoil lug for consistent accuracy. Eight cross-slots allow you to position your optics for optimum eye relief. Accepts Weaver-style rings or mounting systems. 

**SPECS:** 6063 T6 aluminum, silver or black, matte, anodized finish. 6" Bbl. - 7 1/2" (20.1cm) long x 3/16" (2cm) wide. 3.1 oz. (87g) wt. 7 1/2" Bbl. - 10" (25.4cm) long x 3/16" wide. 4 oz. (113g) wt. Includes mounting screws.

**#957-000-071AT Redhawk 6" Bbl. Mount, Silver, 7E53H18 . . . \$ 59.95**

**#957-000-073AT Redhawk 7 1/2" Barrel Mount, Silver, 7E57J62 . . . 64.95**

**#957-000-074AT Redhawk 7 1/2" Barrel Mount, Black, 7E57F62 . . . 64.95**

**REDHAWK/BLACKHAWK** - Drill and tap mount attaches the scope to your Ruger's top strap. Fits Ruger® Redhawk®, Blackhawk® and Super Blackhawk®. Accepts Weaver-style rings. 

**SPECS:** Extruded aluminum, silver or black, anodized, matte finish. 4 1/2" (11cm) long, 1/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws. Requires drilling and tapping.

**#957-124-100AT Black Ruger Mount, 7E31H03 . . . \$ 34.99**

**#957-124-101AT Silver Ruger Mount, 7E31I03 . . . 34.99**

**REDHAWK/BLACKHAWK HUNTER** - No-drill, no-tap mount fits Redhawk and Blackhawk Hunter with integral ring cuts on the barrel. Double recoil lugs hold tight under heaviest recoil. 

**SPECS:** Extruded aluminum, black or silver, anodized, matte finish. 5 1/4" (13cm) long, 1/8" (22mm) wide, 2.6 oz. (74 g) wt. Includes mounting screws.

**#957-000-045AT Silver Redhawk Mount, 7E44K31 . . . \$ 49.95**

**#957-000-044AT Black Redhawk Mount, 7E44D31 . . . 49.95**


**SUPER REDHAWK®** - Aluminum mount attaches to the Ruger factory ring cuts and requires no drilling and tapping. Uses three, steel,

recoil pins to prevent "scope flyoff," and accepts Weaver-style rings or mount systems such as used on Tasco 40mm red dot optics. **Super Redhawk .44 Mag** fits only the .44 Magnum and can be installed without removing the front and rear sights. Features a matte, silver, anodized finish. **Super Redhawk Casull** is similar in design, but uses the rear sight notch as a recoil lug to allow the frame and mount to take maximum recoil. Fits .44 Magnum, .454 Casull, and Ruger .480 models with removal of the rear sight. Available with black, anodized finish. 

**SPECS:** 44 Mag - Aluminum, silver, matte, anodized finish. 5" (12.7cm) long. Fits .44 Magnum only. 2.6 oz (73g) wt. **Casull** - Aluminum, black, matte, anodized finish. 5 1/2" (14cm) long. Fits .44 Magnum, .454 Casull, and .480 Ruger models. Includes mounting screws.

**#957-000-036AT Super Redhawk .44 Mag Mount, 7E44A31 . . . \$ 49.95**


**#957-000-050AT Super Redhawk Casull Mount, 7E53P18 . . . 59.95**

**RUGER SINGLE SIX** - No-drill, no-tap mount attaches to frame at the rear sight screw. Contoured recoil lug fits in rear sight slot to prevent movement. Accepts Weaver-style rings. Use on .22 LR only, not for use on .32 Magnum guns. 

**SPECS:** Extruded aluminum, black or silver, anodized, matte finish. 4 1/2" (11cm) long, 1/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws.

**#957-000-043AT Silver Single Six Mount, 7E31N01 . . . \$ 34.95**


**#957-000-042AT Black Single Six Mount, 7E31J01 . . . 34.95**

**S&W REVOLVER** - Low profile and lightweight. Fits newer, factory drilled and tapped K, L and N frame revolvers; no gunsmithing required. Older revolvers require drilling and tapping. 

**SPECS:** Extruded aluminum, black or silver, anodized, matte finish. 4 1/2" (11cm) long, 1/8" (22mm) wide, 1.3 oz. (38 g) wt. Includes mounting screws.

**#957-113-100AT Black S&W Mount, 7E31B01 . . . \$ 34.95**

**#957-113-101AT Silver S&W Mount, 7E31Q01 . . . 34.95**

**BUCKMARK** - Convert open sight, Browning Buckmark for scope use; no gunsmithing required. Accepts all Weaver-style rings. 

**SPECS:** Aluminum, black or silver, matte finish. 6 1/4" (15cm) long, 1.7 oz. (54 g) wt. Fits Browning Buckmark, Standard model only. Includes mounting screws.

**#957-100-200AT Black Buckmark Mount, 7E26D75 . . . \$ 29.99**

**#957-000-034AT Silver Buckmark Mount, 7E26H57 . . . 29.95**

**RUGER MARK I/II/III NO-GUNSMITHING** - Install conventional or red dot optics on your pistol in only minutes. Lightweight, aluminum mount attaches to a pre-drilled and tapped, dovetail-filler block. Simply remove your rear sight, install filler-block, screw on mount and attach scope and rings. Accepts Weaver-style rings. 

**SPECS:** Aluminum, black or silver, matte finish. 5 1/4" (14cm) long, 1/2" (12.7mm) wide, 2.5 oz. (71 g) wt. Fits Mark I, II, and III. Includes filler block, mounting screws and instructions.

**#957-000-035AT Black Mark I/II/III Scopemount, 7E46M69 . . . \$ 49.99**


**#957-201-100AT Silver Mark I/II/III Scopemount, 7E46G74 . . . 49.99**

**RUGER MARK I/II/III DRILL & TAP** - Designed to fit factory drilled and tapped receivers for fast, easy, no-gunsmithing installation.

### ALLCHIN S&W REVOLVER MINI STS SCOPE MOUNT

Mount A Mini Red Dot On Any Pre-Drilled S&W Revolver



Easy-to-install mount lets you upgrade any pre-drilled S&W revolver with a small red dot sight. Machined aluminum construction offers durability and weight savings. Mount body alignment holes accept C-More STS, Burris Fastfire, JPoint, Optima 2000, Leupold Delta Point, Sig and most other small red dot sights. Positions red dot over the rear sight and as close to the bore as possible for fast target acquisition. 

**SPECS:** 6061 T6 aluminum, hardcoat anodized clear (silver) or matte black. 2.5" (65mm) long, 1" (27mm) wide. .6 oz. (17g) wt. Includes mounting hardware


**#100-010-548AT S&W Revolver Scope Mount, Black, 5K38H85 . . . \$ 45.00**

**#100-010-549AT S&W Revolver Scope Mount, Silver, 5K38C85 . . . 45.00**

### EGW REVOLVER SCOPE MOUNT

Fits Ruger & S&W Revolvers



Ruger - Mounts the scope low on all single and double action revolvers. Requires drilling and tapping two holes. **Smith & Wesson** - Remove the rear sight and quickly install on newer revolvers drilled and tapped at the factory. Locates the scope on the top strap, over the top of the grip for better balance. Accepts Weaver-style rings. 

**SPECS:** Aluminum, anodized finish, black or silver. 4" (10cm) long, includes mounting screws. S&W fits K, L and N frame.

**#296-302-100AT Black Ruger Mount, 6B26Q08 . . . \$ 29.99**

**#296-302-101AT Silver Ruger Mount, 6B30E43 . . . 34.99**

**#296-301-100AT Black S&W Mount, 6B26F08 . . . 29.99**

**#296-301-101AT Silver S&W Mount, 6B30E43 . . . 34.99**

Fully contoured to fit flush on top of the receiver or barrel without unsightly gaps. Extra-strong, lightweight aluminum; accepts Weaver-style rings. Can be easily installed on non-factory drilled and tapped pistols. 

**SPECS:** Extruded aluminum, anodized, black or silver. 4 1/4" (12cm) long, includes mounting screws. Fits Mark I, II, III, and 22/45™.

**#957-108-022AT Black Mark I/II/III Scopemount, 7E20J97 . . . \$ 21.99**

**#957-108-002AT Silver Mark I/II/III Scopemount, 7E20Q97 . . . 21.99**

**X-FRAME SCOPE MOUNT** - Low profile with the strength of stainless steel, this new S & W scope mount accepts Weaver-style and most Picatinny rings and accessories. Installation is easy, simply remove the rear sight and install this versatile base in just minutes. Oversize recoil lug prevents the scope mount from shifting even when shooting full-house, magnum loads. Fits all newer K, L, N and X-frame revolvers that come drilled and tapped from the factory. Revolvers manufactured before 1992 require drilling and tapping. 


**SPECS:** Stainless steel, natural finish. 4 1/2" (11.4cm) long, 1/8" (22mm) wide. 1.3 oz. (38 g) wt. 6-48 mounting screws included.

**#957-000-068AT Silver S&W X-Frame Scope Mount, 7E69C99 . . . \$ 69.99**

### HIGH STANDARD TARGET PISTOLS UNIVERSAL SCOPE MOUNT

Factory Part Ensures A Perfect Fit



Lightweight aluminum mount with multiple cross-slots for Weaver-style rings allows proper scope eye relief. Weighs only 2 oz., won't affect balance. TORX screws resist stripping. Requires no gunsmithing. 

**SPECS:** Aluminum, Hard Anodized Finish. 6" (15.2cm) x 1/2" (12.7mm). Wt = 2 oz, Black. Fits: Olympic OM, M Grip, .22 Short; Supermatic Citation SC-M, M Grip, .22; Supermatic Tournament SK-M, M Grip, .22; Supermatic Trophy STR-M, M Grip, .22; Victor VCT-M, M Grip, .22

**#430-000-122AT Universal Scope Mount, 3D41H43 . . . \$ 47.99**

### LSP S&W 41 LONG SCOPE BASE

Extra Long For Precise Eye Relief



Six inch long rail lets you precisely tailor eye relief for each shooter. Fits factory drilled and tapped barrels; drill and tap older barrels for custom mounting applications. Accepts all Weaver-style rings. 

**SPECS:** Aluminum, black, anodized finish. 6" (15cm) long. Separate models for 7" Long or 5 1/2" Long Heavy barrel. Includes screws, instructions.


**#530-041-007AT 7" S&W M-41 Mount, 3E28M35 . . . \$ 31.95**

**#530-041-055AT 5 1/2" S&W M-41 Mount, 3E28I35 . . . 31.95**

### LSP HIGH STANDARD SCOPE BASE

Contoured For Bull Barrels



Thirteen cross-slots provide a wide range of mounting positions; cantilever design centers the weight over the grip. Contoured for factory bull barrels (drill and tap). Accepts Weaver-style rings. 

**SPECS:** Aluminum, anodized, matte black finish. 5 1/4" (13.3cm) long. Fits LSP Match barrels, factory bull barrels require drilling and tapping. Includes instructions and screws.

**#530-500-001AT High Stnd. Scope Base, 3E27N40 . . . \$ 29.95**

### WARNE S&W REVOLVER MAXIMA MULTI SIGHT BASE

Use Scope Or Iron Sights



Heat-treated, CNC-machined, steel scope mount lets you install optics without sacrificing your iron sights. Includes a removable front sight and a machined, rear sight recess that accepts the new-style, round-front, factory rear sight. Milled area on the underside of the base acts as a recoil lug. Drilled holes make mounting easy on factory drilled and tapped guns. Accepts Weaver-style rings. Standard **Maxima** fits K, L, N and X frame revolvers. **Maxima X Frame** has extra metal up front and longer screws for improved recoil protection; fits X frame only. 

**SPECS:** CNC-machined steel, powder coat matte black or silver finish. Approx. 5 1/4" (14.6cm) long. **Maxima** fits Smith & Wesson K, L, N, and X frame revolvers. **Maxima X Frame** fits X frame only.

**#947-000-100AT Maxima Base, Black, 7D87Q44 . . . \$ 101.99**

**#947-000-101AT Maxima Base, Silver, 7D90D71 . . . 107.94**

**#947-000-246AT Maxima X Frame Base, Blk, 7D87P44 . . . 101.99**

**#947-000-247AT Maxima X Frame Base, Silver, 7D86P65 . . . 107.94**

**STRATTON CUSTOM THOMPSON CENTER SCOPE BASE**



Strong Enough To Withstand The Sharpest Recoil

Weaver-style bases have cross slots for two or three rings; provide extra strength to withstand the recoil of the hardest kicking calibers. Gives added flexibility when mounting long or short scopes. Two styles: four-screw factory and six-screw custom, to fit Encore® and Contender® barrels. Six-screw also matches four hole, factory spacing. Four screw Magnum Encore base eliminates the undercut in front for extra stiffness and strength when shooting heavy recoil magnum chamberings in your TC Encore. **SPECS:** Carbon steel, matte blue, or stainless steel (SS), matte finish. 5" (12.7cm) long.

- #100-002-188AT Contender Base, 4-screw, Blue, 5K46K09 ..... \$ 47.99
- #100-002-190AT Encore Base, 4-screw, Blue, 5K46B09... 47.99
- #100-000-520AT Encore Base, 4-screw, SS, 5K54E78... 56.99
- #100-002-191AT Encore Base, 6-screw, Blue, 5K46D09... 47.99
- #100-004-966AT Magnum Encore Base, 4-screw, Blue, 5K48D04..... 49.99
- #100-004-965AT Magnum Encore Base, 4-screw, SS, 5K57E08..... 59.99

**TACTICAL SOLUTIONS BROWNING BUCK MARK PICATINNY SCOPE MOUNT**



Mount A Scope & Retain Iron Sights

Lightweight, aluminum Picatinny rail replaces factory rib/rear sight and lets you mount an optic while retaining the benefit of backup "iron" sights. Eight cross-slots let you position the optic for best eye relief. Integral open rear sight adjusts for windage and elevation. Drilled to fit the factory hole spacing and use the original factory rib/rear sight screws. **SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. Approximately 5" (12.7cm) long, 1/2" (12.7mm) wide, 3/16" (4.8mm) high from top of receiver.

- #100-005-205AT Picatinny Scope Mount, 8K74D99... \$ 74.99

**UM TACTICAL UNIVERSAL PISTOL MOUNT**



Allows You To Mount An Optic Onto Your Semi-Auto Handgun



Speed Holster

Universal mount allows you to attach tactical optics onto most pistols that have a 1913 Picatinny or accessory rail under the barrel. Made of CNC machined aluminum, with a hard coat anodized finish, mount requires no tools or retro-fitting. Simply slide the mount over the pistol until the safety detent locks onto the barrel rail, and then clamp the optic on top of the mount for a solid fit to your pistol. Fits medium to large sized handguns and adds a 2.5-inch section of Picatinny rail to the top of your pistol.

Mount has a small rail on the bottom for attaching a tactical light or laser. The **UMH3 Universal Speed Holster** is specifically designed to fit most semi-auto firearms equipped with the UM Tactical Pistol Mount. Made of carbon fiber, this Blade-Tech style paddle holster includes a Level 1 retention adjustment. **SPECS:** Aluminum, hard coat anodized finish, matte black. Holster - Carbon fiber, black.

- #100-015-786AT Universal Pistol Mount, 5B71H64... \$ 84.99
- #100-015-787AT Universal Speed Holster, Right Hand, 5B62M87..... 69.99

**VOLQUARTSEN RUGER® MARK II/III SCOPE MOUNT**



Fast, Easy, Secure Mounting Of Scopes & Red Dot Sights

Lightweight, one-piece Weaver-style rail allows easy mounting of a red dot optic or reflex scope on your pistol. Seven cross-slots provide plenty of flexibility in positioning a variety of different-style optics. Secures to factory pre-drilled receiver holes with three, steel Allen head screws for a solid installation unaffected by recoil. **SPECS:** Aluminum, hardcoat anodized, matte black or matte silver. 4 1/2" (24cm) long, 1/2" (12.7mm) wide, 3/16" (4.8mm) high. 1.8 oz. (51g) weight. Mounting screws included. Fits factory pre-drilled receivers on Ruger Mark II and III pistols.

- #930-000-066AT Scope Mount, Black, 3Z26E89..... \$ 29.99
- #930-000-065AT Scope Mount, Silver, 3Z26N89..... 29.99

**WEAVER RUGER® BLACKHAWK® NO-DRILL, NO-TAP MOUNT SYSTEM**

Ready-To-Install Base & Ring System



Compact, lightweight mounts use existing holes for simple, do-it-yourself scope mounting. Everything needed is supplied; just add your scope. **SPECS:** Aluminum base, steel rings; black or stainless steel finish. Approx. 3 1/4" (9.5cm) long, 1/2" (12.7mm) thick, weighs 5 oz. (142 g) w/rings. Fits Ruger® Blackhawk® and Super Blackhawk®

- #955-300-001AT 301/301S No-Drill/No-Tap Mount, 5E82Q52..... \$ 89.99

**AIMTECH SHOTGUN SCOPE MOUNT**



No-Drill, No-Tap Scope Mounts Are Easy To Install

Lightweight mounts fit over and attach to both sides of the receiver to give balanced support for any scope. Built to withstand even hard-hitting slug recoil. Installs in minutes; just remove the trigger group pins and replace

with bolts included. Accepts Weaver-style rings. **SPECS:** Aluminum, black, anodized finish. Approx. 6" (15.2cm) long, 2 1/2" (6.3cm) high. Includes bolts, wrenches, instructions.

STOCK #	FITS	GA	PRICE
#017-200-008AT	Benelli M1 Super 90	12	7A40C36 \$ 41.99
#017-200-009AT	Browning Auto-5	12	7A39P12 \$ 40.99
#017-200-006AT	Ithaca 37/87	12	7A39H49 \$ 41.99
#017-200-001AT	Rem. 1100/11-87	12	7A37C59 \$ 39.99
#017-200-011AT	Rem. 1100/11-87 Lt.	20	7A39F12 \$ 40.99
#017-200-012AT	Rem. 870, Lt.	20	7A39D12 \$ 40.99
#017-200-002AT	Rem. 870	12	7A37G59 \$ 39.99
#017-200-003AT	Mossberg 500	12	7A37D59 \$ 39.99
#017-200-004AT	Win. 1300	12	7A39G49 \$ 41.99

**"DA-MAR" SHOTGUN SCOPE MOUNT**



Secure, Extra-Strong Scope Mounting Even On Thin, Semi-Auto Receivers

Wrap-around sub-base puts the mounting screws into the receiver's thicker sidewalls for rock-solid, no-fail scope mounting even on thin, semi-auto receivers. Drill and tap six, 6-48 holes, then cinch down the lightweight, aluminum, sub-base plate over the top radius. Aluminum top rail accepts all Weaver-style rings. **SPECS:** Aluminum, black anodized. Approx. 5" (12.7cm) long. 2.3 oz. (64 g) approximate wt. Includes screws and instructions.

STOCK #	BASE#	FITS
#483-100-001AT	#1	Rem. 870/1100/11-87/58/11-48, 12 Ga. (2 1/4"), Ithaca 51, SKB 20 Ga. S&W 1000, Brwning 2000, Franchi 20 Ga.
#483-100-009AT	#1A	Rem 870/11-87 Super Mag with 3 1/2" chamber
#483-100-002AT	#2	Rem. 870/1100 LT 20, 11-87 20 Ga.
#483-100-007AT	#7	Browning B-80 12 Ga., Beretta 302/390/1200, SKB, Weatherby 82/92., Charles Daly, Win. 1200/1400, Browning Gold 12, Franchi 12 ga., Mossberg 9200/835, Benelli Super 90, Win. Super X2.

— Advise # — Shotgun Mount, 3H47Q16 ..... \$ 54.95

**HAVLIN MOSSBERG 500/590/835 SCOPE RAIL**

Solid & Lightweight For Mounting Scopes & Other Optics



Weaver-style scope mounting rail matches the top contour on all Mossberg 500/590 and 835 models for a durable, no-gap installation. Held by four, 8-40 tpi machine screws that stand up to recoil without deformation or stripping. Machined from lightweight, extruded aluminum, and anodized to match the anodized or black painted Mossberg receivers. Accepts all Weaver-style scope mounts and accessories. **SPECS:** Aluminum, black, anodized finish. 5" (12.7cm) long. 2 oz. (56.6g) wt. Includes (4), 8-40 tpi mounting screws. Installation requires drilling and tapping on early model Mossberg 500.

- #100-002-901AT Mossberg Scope Rail, 6A18E32..... \$ 19.99

**MESA TACTICAL REMINGTON 870 SADDLE RAIL**



Easy-Install Mount For Scopes, Red Dots & Other Tactical Sights

One-piece saddle mount has a Picatinny rail that lets you attach a scope, red dot reflex sight, or other tactical sighting device to your Remington 870 shotgun. Low profile 8 1/4" rail also offers plenty of room to mount a night vision device or long eye relief scope. Four, steel, Allen head cross-bolts replace the factory trigger pins to create a rock solid grip between the saddle mount and receiver. Precision machined aluminum with cutouts that reduce weight without sacrificing strength. **SPECS:** 6061 T6 aluminum, mil-spec Type III hardcoat anodized, matte black. 10 1/4" (26cm) OAL, 8 1/4" (21cm) long rail. 4.6 oz. (130g) weight. Includes mounting cross-bolts.

- #100-005-800AT Rem 870 Saddle Rail, 5A87M02..... \$ 89.99

**B-SQUARE UNIVERSAL CANTILEVER RIB MOUNT**



Increases Accuracy For Slug Shooting

Mount the scope on the barrel. No gunsmithing; fits ribs up to .380" with 1/2" wide vents on 1 1/2" cto-c spacing. **SPECS:** Aluminum, black, anodized finish. 11" (28cm) long, 7.2 oz. (205 g) wt.

- #122-161-750AT Cantilever Rib Mount, 6K44A99..... \$ 44.99

**WEAVER REMINGTON/MOSSBERG SHOTGUN NO-GUNSMITHING OPTIC MOUNT**

Easy-To-Install, Low-Profile Sight Mount



Easy-to-install mount lets you attach an optic or laser sight to your shotgun without drilling, tapping, or making permanent alterations to the gun. Remove the two trigger group pins (Rem.), or the ejector screw and trigger pin (Moss.), slide on the mount, line up the holes, and secure it with the included replacement pins. Low-profile, form-fitting design looks like part of the receiver and positions the sight close to the bore axis. Seven cross-slots in the 5" rail let you install an optic, Weaver top-mount rings, or other accessory, with plenty of flexibility in setting eye relief. Lightweight, yet rugged, reinforced molded polymer stands up to extreme weather conditions ranging from -40°F to 150°F. **SPECS:** Reinforced, injection-molded polymer composite. Includes mount, button head ejector screw, trigger group bolt, knurled nut, threaded insert, nylon-tipped set screw, 1/2" and 1/8" hex head wrenches, and instructions. Remington fits 870, 1100, 11-87; 12 and 20 gauge; right or left handed models. Mossberg fits 500, 835; 12 gauge only; right handed models only.

- #955-000-141AT Rem. Mount, Black, 5E23N62..... \$ 26.99
- #955-000-142AT Moss. Mount, Black, 5E23E62..... 26.99

**HAHN PRECISION MOSSBERG 500/590 SHOTGUN ACCESSORY RAIL**



Rigid Mounting Platform For Hunting Or Tactical Shotguns

Precision-machined accessory rail lets you mount optics, ghost-ring sights, lasers, lights, night vision gear, and other tactical accessories on your Mossberg 500/590. Cut to true MIL-STD 1913 Picatinny specs from 6061-T651 billet aluminum. Attaches to factory drilled and tapped receivers using the provided mounting screws. Low-profile design with integral sight channel allows use of front sight when optics/accessories are removed. Extends forward over barrel for maximum mounting flexibility. Skeletonized underside reduces weight without compromising rigidity or strength. Durable, MIL-A-8625 "F" Type III Class 2 hardcoat anodized finish for additional strength and superb wear-resistance. **Safety Rail** includes an integrated, oversized, ambidextrous tang safety that can be activated quickly and easily in high stress situations. Safety design reduces stress on factory safety screw for enhanced reliability. **Standard Rail** can also be adapted to other shotgun makes/models. **SPECS:** Aluminum, matte black hardcoat anodized finish. Requires drilling and tapping on early model Mossberg 500. Safety Rail - 9 1/2" (24.1cm) long, 1 1/2" (3.8cm) wide, 1/2" (12.7mm) tall. Standard Rail - 7 1/4" (18.4cm) long, 1 1/2" wide, 1/2" tall.

- #100-002-506AT Mossberg 500/590 Standard Rail, 6K39K92..... \$ 45.00
- #100-002-421AT Mossberg 500/590 Safety Rail, 6K75L40..... 85.00

## BADGER ORDNANCE REMINGTON 870/1100/11-87 TACTICAL SHOTGUN ACCESSORY RAIL

Expands Sighting Options For  
Tactical Shotguns



Rigid accessory mounting platform lets you install optics, ghost-rings, red dot sights, and other accessories on your Remington tactical shotgun. Precision milled from pre-hardened 4142 ordnance steel (RC 28-32) to a true MIL-STD 1913 Picatinny cut with a rugged mil-spec manganese phosphate parkerized finish. Radiused underside fits contour of receiver for positive engagement along the entire length of the rail. Hole spacing matches pre-drilled receiver holes on factory Tactical models; other models may require drilling and tapping. Mounts securely to receiver with the hardened steel #8-40 Torx® screws included in kit. **USA**

**SPECS:** Steel, parkerized finish, matte black. 5 1/2" (14cm) long, .835" (21.2mm) wide, 3/16" (7.8mm) high. Fits Remington 870, 1100, and 11-87. Hole-spacing fits factory Tactical models; other models may require drilling and tapping of receiver.

**#093-000-030AT Rem 870/1100/11-87 Accessory Rail, 3K100Q00..... \$ 109.99**

## B-SQUARE SHOTGUN SADDLE MOUNTS



No Gunsmithing,  
Contoured To Fit Receiver

Firmly attaches to both sides of receiver using existing screw/pin holes, and won't obstruct operation. Recoil transfers to receiver for greater strength. Weaver-style rail with multiple slots provides plenty of eye relief adjustment for

scopes and electronic sights. Open sight channel under the rail allows continued use of iron sights.

**SPECS:** Aluminum, anodized, black, Approx. 6" (15cm) long. Two 1" Weaver-style rings included. Rem 870/1100/11-87 fits 2 1/4" and 3" 12 gauge models. Rem 870 Magnum fits 3 1/2" Magnum 870 12 gauge shotguns only.

STOCK #	FITS	GAUGE	PRICE
<b>#122-000-001AT</b>	Benelli Nova	12 Ga. 6K38C63	<b>\$ 39.99</b>
<b>#122-460-500AT</b>	Mossberg 500	12 Ga. 6K5176	<b>\$ 69.99</b>
<b>#122-460-870AT</b>	Rem 870/1100/11-87	12 Ga. 6K38L63	<b>\$ 39.99</b>
<b>#122-000-047AT</b>	Rem 870 Magnum	12 Ga. 6K55G76	<b>\$ 69.99</b>
<b>#122-460-120AT</b>	Win. 1200/1300/1400/1500	12 Ga. 6K55A76	<b>\$ 69.99</b>

## MESA TACTICAL SHOTGUN RECEIVER MOUNT PICATINNY RAIL

Mount Optics Or Tactical Sights



One-piece, MIL-STD 1913 Picatinny rail allows mounting a variety of optics and tactical sights on popular shotguns. Streamlined, low profile design installs to the top of the receiver for a smooth "built-in" appearance. Four steel, Allen head screws secure rail to receiver for exceptional holding power. Fits shotguns with factory drilled and tapped receivers or receivers custom drilled and tapped for 8-40 threads. Not recommended for mounting optics on guns with high-mounted telescoping stocks. **USA**

**SPECS:** Machined 6061 T6 aluminum, Type III hardcoat anodized, matte black. Fits factory drilled and tapped receivers. Includes mounting hardware and instructions. Mossberg - 5 1/2" (13.9cm) long. Fits 1997 and later-mfr pump action shotguns; can be installed on 930 semi-auto with additional fitting. Remington 870 - 5 1/2" long. Drop-in fit to 870; can be installed on 1100 or 11-87 semi-auto with additional fitting. Benelli M2 - 4 1/2" (11.4cm) long. Drop-in fit on M2 Tactical; can also be installed on round-top M1 after drilling and tapping receiver.

**#100-004-034AT Mossberg Receiver Rail, 5A34A20... \$ 39.99**  
**#100-005-801AT Rem 870 Receiver Rail, 5A29J99... 29.99**  
**#100-005-803AT Benelli M2 Receiver Rail, 5A40G02... 41.99**

## BROWNELLS DOVETAIL SCOPE BASE

Fits All Ungrooved .22s;  
Available In Two Diameters



Brownells Dovetail Scope Base gives you the ability to update any of those millions of older .22 rifles to accept modern rimfire optics. Made of tough, durable, aluminum; black anodized to complement blued firearms. Solid, rigid support. Accepts all tip-off rings designed for 3/8" nominal dovetailed receivers. Pre-drilled and countersunk to accept three 8-40 screws (included). Drill and tap receiver to mount. See our 12" long base stock below for all those special applications. **USA**

**SPECS:** Aluminum, black, anodized. 1" dia. fits receivers of 1" and 1.05" (2.7cm). 4" (10.2mm) long.

**#080-030-104AT 100-4 Dovetail Base, 8K4J48..... \$ 59.99**

**DOVETAIL SCOPE BASE STOCK** - 12" lengths of blank Dovetail Scope Base Stock—just the ticket for all those strange and challenging scope mounting jobs your customers just keep bringing in. Simply cut to length, drill and countersink, then refinish exposed ends with our Alumina-Hyde™ or Baking Lacquer. Accepts rings that fit a 3/8" nominal dovetail. **Contoured** stock (same base diameters as our 4" Base) for the more conventional rifles; **Flat** stock can be shaped, milled, shortened and adapted to even the most exotic application. **USA**

**SPECS:** All are 12" (30.48cm) long. **Contoured** - 840-12, .840" (21.3mm), or 100-12. 1" dia. base contour. **Flat** - 1/2" (12.7mm) wide.

**#080-031-841AT 840-12 Contoured Stock, 8K6N13..... \$ 9.99**

**#080-032-101AT 100-12 Contoured Stock, 8K8P43..... 9.99**

**#080-032-120AT Flat Dovetail Stock, 1B4C95..... 9.99**

## A.R.M.S. FAL/L1A1 PICATINNY SCOPE MOUNT



Integral Rail Mounts  
Optics Or Tactical Sights

Heavy duty, one-piece dust cover with integral Picatinny rail provides a rock-solid platform and optimum mounting flexibility for scopes or tactical sights. MIL STD 1913 rail accepts both Picatinny and Weaver-style mounting components. Over 8 1/2" long to provide plenty of mounting space, even for long body scopes. Rigid, extruded aluminum body with riveted, internal steel frame rails for extra support. Hardcoat anodized for durability. Models available for standard and paratrooper actions. **Paratrooper** features a steel, recoil spring rod riveted in place for use with folding stocks only. Fits inch and metric pattern FAL/L1A1 and clones. **USA**

**SPECS:** Extruded aluminum, hardcoat anodized, matte black with steel rails. 8 1/2" (21.8cm) long x 1 1/8" (3.6cm) wide. **Standard** - 7 oz. (198g) weight. **Paratrooper** - 7.4 oz. (210g) weight. Fits FAL/L1A1 and clones with inch or metric pattern receivers.

**#100-004-124AT Standard FAL Scope Mount, 1K118F36..... \$ 134.99**

**#100-004-125AT Paratrooper FAL Scope Mount, 1K132E46..... 149.99**

## AIMTECH MINI-14 & 30 SCOUT RAIL

Very Fast Sighting For Close  
Range Varmint Hunting



Replaces the handguard with a Picatinny-style rail that securely clamps to the barrel. Iron sights remain usable; no modifications to rifle. **USA**

**SPECS:** 6000 series, aluminum, black anodized. 9" (22.7cm) long, 14.3 oz. (405 g). Accepts Weaver-style rings.

**#017-300-014AT Mini-14 Scout Rail Mount, 7A80D45... \$ 85.99**

**#017-300-001AT Mini-30 Scout Rail Mount, 7A80H45... 85.99**

## AMEGA RANGES MINI SCOUT MOUNT

Allows Forward Mounting Of  
Optics & Accessories; Helps  
Control Barrel Vibration



Rock-solid, precision machined, aluminum mount provides plenty of top rail space for secure attachment of forward-mounted optics. Directly replaces the factory hand-guard/dust cover on Ruger® Mini-14®/Mini-Thirty®, M14, M1A, and M1 Garand with no permanent alterations to gun. Attaches directly to barrel above the forearm on Ruger 10/22®. Under-barrel clamp mounts tight to barrel to improve barrel rigidity and harmonics, so you gain optimal accuracy from your firearm. Rail accepts Picatinny or Weaver-style rings and features a full-length sight channel that allows use of iron sights when optics are removed. **Early Mini-14** fits early models with 180 to 198 serial number prefix and non-flanged, straight taper barrel, including Ranch Rifles. **Mini-14/Thirty** fits all 580 Series rifles with heavy flanged barrel, chambered in .223, 6.8 SPC, or 7.62 x 39mm, including NRA model and Target. **M14/M1A** fits U.S. mil-spec, standard contour barrel or Springfield Armory standard weight barrel only. Will not fit Springfield Armory Socom barrels or any Chinese manufactured barrels. **M1 Garand** fits USGI military spec barrel, including Tanker model and BM-59. **M1 Carbine** fits U.S. mil-spec including recent models manufactured by Kahr Arms. **Mosin-Nagant** fits any variation of the 91/30 rifle, including 1938 and 1944 carbines; installs over rear sight, no modification of bolt or receiver required. **USA**

**SPECS:** Aluminum, hardcoat anodized finish, matte black. **Mini-14/Thirty** - 10" (25cm) long, 1 1/2" (4cm) wide, 1/2" (2cm) high, 9.3 oz. (264g) wt. **M14/M1A** - 12 1/4" (32.4cm) long, 1 1/8" (4.8cm) wide, 1 1/8" (3cm) high, 15.3 oz. (434g) wt. **M1 Carbine** - 8" (20.3cm) long, 1 1/4" (4.4cm) wide, 1/2" (1.9cm) high, 8.4 oz. (238g) wt.

**#100-003-202AT Early Ruger Mini-14, 1B115C92..... \$ 133.99**

**#100-004-361AT Ruger Mini-14/Mini-Thirty, 1B111D90..... 129.99**

**#100-004-403AT Ruger 10/22, 1B101B42..... 116.99**

**#100-015-320AT Ruger 10/22 Takedown, 1B107J09... 116.99**

**#100-003-203AT M14/M1A, 1B217M31..... 249.99**

**#100-004-404AT M1 Garand, 1B136D70..... 159.99**

**#100-004-465AT M1 Carbine, 1B126N25..... 139.99**

**#100-017-832AT Mosin-Nagant, 1B149D95..... 149.95**

**#100-015-322AT Remington 700, 1B130G05..... 141.99**

**#100-015-321AT Remington 742/7400, 1B130L05... 141.99**

## BENCH-SOURCE SAVAGE RIFLE SCOPE BASES



Standard Or 20 MOA  
Elevation For Short & Long  
Range Competition

Lightweight, one-piece base with integral Picatinny rail fits Savage short action benchrest rifles. Standard model is intended for ranges from 50 to 300 yards, 20 MOA model provides an additional 20 minutes-of-angle in elevation for hitting targets beyond 400 yards. Precision machined from 7075 T6 aluminum for strength and durability. Length and width tolerances vary less than .002" to help center the scope to the bore and minimize initial adjustments. Four, steel Allen head screws secure the base to the receiver and provide exceptional holding power. Fits Savage round top, short action receivers using factory pre-drilled scope base holes. Accepts Picatinny and Weaver-style rings. **USA**

**SPECS:** 7075 T6 aluminum, silver. Steel, 6-48 tpi x 3/8" mounting screws. 6" (15cm) long x 1 1/2" (2.1cm) wide. 1.9 oz. wt. **Standard** - .41" (10.4mm) high. **20 MOA** - .38 - .41" (9.6-10.4mm) high, tapered. Fits Savage round top, short action receivers using factory pre-drilled scope base holes.

**#100-004-446AT Picatinny Scope Base, Standard, 4Z72Q86..... \$ 79.99**

**#100-004-447AT Picatinny Scope Base, 20 MOA, 4Z72C86..... 79.99**

## B-SQUARE 3/8" DOVETAIL-TO-WEAVER ADAPTER

Allows Mounting Weaver-Style  
Rings On Dovetailed Receivers



Lets you choose from a wide selection of Weaver-style rings for receivers with nominal 3/8" dovetail. Secure, single-slot, two-piece design allows perfect ring spacing every time and easy access to chamber.

**SPECS:** Aluminum, black matte finish. Each base measures 1 1/2" (3.81cm) long.

**#122-000-011AT 3/8" Dovetail to Weaver Adapter, 6K28F36..... \$ 29.99**

## ADVANCED TECHNOLOGY MOSIN NAGANT SCOPE MOUNTING SYSTEM



Convert Nagants Into Practical  
Hunting Rifles

Everything you need to mount a scope on the split receiver of Mosin Nagant rifles and carbines. Instructions explain all the how-to steps. Includes base, bolt handle and drills and taps. Accepts Weaver-style rings.

**SPECS:** Bolt Handle: Stainless steel, polished finish. Scope Base: T-6 Aluminum, black anodized. 6" (15.2cm) long, 2.9 oz. (82g) wt. Gunsmith installation recommended.

**#019-100-010AT Mosin Nagant Mount, 9A48E25..... \$ 52.99**

## BURRIS RUGER® WEAVER ADAPTER

Lets You Use Weaver-Style Rings  
On Ruger Rifles & Revolvers



Gives you a wider selection of available rings. Extra slots expand mounting options. Securely clamps to rifles and handguns; machined for Ruger factory rings.

**SPECS:** Steel, polished blue finish. **M77** fits M77 rifles, Super Redhawk®. Set of two bases, 1.375" (35.9mm) long and 1.980" (50.3mm) long. **77/22** fits Redhawk® Hunter, Blackhawk® Hunter, 77/22®, 77/44®, 77/50®, Model 96™ (44 Mag), 10/22® Mag, Mini-14®, Deerfield, and No. 1. Set of two 2.980" long bases.

**#118-410-990AT M77 Weaver Adapter, 8A32L99..... \$ 32.99**

**#118-410-991AT 77/22 Weaver Adapter, 8A32J99..... 32.99**

## D.S. ARMS FN-FAL SA-58 SCOPE MOUNT



No Gunsmithing, Sturdy  
Base For Optical Sights

It takes only a few minutes to replace the dust cover with this solid aluminum mount. Clamps to frame with five, internal steel rails; provides a rock solid base for mounting even the largest scopes. Picatinny-style rail provides optimum mounting flexibility for scopes or electronic sights. Drilled to accept Brass-Savr Bag. Made in the U.S.A. Fits inch- and metric-pattern receivers. **Paratrooper** mount features a removable recoil spring guide rod for use with folding stock rifles only. Lets you remove the bolt and carrier without removing the mount and risking loss of zero. **USA**

**SPECS:** 6061-T6 Aluminum, matte black finish. Accepts Weaver-style rings. 8.5" (21.5cm) long, 11 oz. (313 g) weight.

**#274-100-058AT SA-58 Scope Mount, 4G78K99..... \$ 78.99**

**#274-000-014AT SA-58 Paratrooper Mnt, 4G92A99..... 92.99**



## BROWNELLS PICATINNY SCOPE BASE



**Cross-Slot System Provides Solid, Versatile Mounting On Tactical & Sporting Rifles**

Rugged, one piece design provides a rock-solid base for scope rings with greater flexibility than traditional ring-and-base systems. Slots cut to true MIL-STD 1913 specs accept both Picatinny and many Weaver-style rings to increase your scope-mounting options on both tactical and sporting rifles. Easily alter the spacing between the rings to accommodate different-length scope bodies, and adjust eye relief to fit the specific needs of each shooter. Installs quickly using factory drilled scope base holes and screws—no drilling and tapping on most guns. Underside of base is cut out to accommodate receivers with right- or left-hand ejection ports. Choose between models precision machined from 4140 billet steel for superb strength and stability, or aluminum models machined from 6061 T6 billet for maximum weight reduction. Matte, black, anodized finish blends with most factory finishes. Models available for Remington, Winchester, and Savage short action (SA), long action (LA), and Winchester Short Magnum (WSM) receivers, plus military Mauser 98 rifles. **20 MOA** models have built-in 20 MOA elevation to help you get enough elevation for accurate long-range targeting without exceeding the elevation adjustment of your scope. **SPECS:** *Aluminum Models* - 6061 T6 aluminum billet, hardcoat anodized matte black. *Steel Models* - 4140 billet steel, matte black oxide finish. *Savage fits models with AccuTrigger™. Mauser 98 fits military rifles; requires drilling and tapping of receiver; four (4) Torx® head screws included. Winchester models fit post-'64 rifles.*

### STANDARD PICATINNY BASES

STK# ALUMINUM	STK# STEEL	FITS
#080-000-393AT	#080-000-402AT	Mauser 98
#080-000-391AT	#080-000-399AT	Rem 700 SA
#080-000-392AT	#080-000-400AT	Rem 700 LA
#080-000-394AT	#080-000-403AT	Savage Model 10 SA
#080-000-395AT	#080-000-401AT	Savage Model 110 LA
#080-000-398AT	#080-000-405AT	Winchester 70 SA
#080-000-397AT	#080-000-404AT	Winchester 70 LA
#080-000-396AT	#080-000-406AT	Winchester 70 WSM

— Advise # — Picatinny Scope Base, Alum., 8K44J92... \$ 49.99  
 — Advise # — Picatinny Scope Base, Steel, 8K79D59... 99.99

### 20 MOA PICATINNY BASES

STK# ALUMINUM	STK# STEEL	FITS
#080-000-763AT	NA	Rem 700 SA
#080-000-764AT	#080-000-766AT	Rem 700 LA/Howa 1500/Wby Vanguard

— Advise # — 20 MOA Picatinny Scope Base, Alum., 8K55M73... \$ 59.99  
 — Advise # — 20 MOA Picatinny Scope Base, ST, 8K98A27... 109.99

**REMINGTON 700 HEAVY DUTY PICATINNY BASE** - Same one-piece, machined aluminum design as our standard Picatinny scope bases, with oversized, 8-40 tpi mounting screws for greater gripping force that's ideal for heavy, long-range scopes. Requires drilling out and tapping factory receiver holes to accept the larger screws. Models to fit short and long action 700s, in standard or extended height with an extra 20 MOA elevation for those extremely long range shots. **SPECS:** *6061 T6 aluminum, hardcoat anodized, matte black. Includes four steel, 8-40 tpi Torx® mounting screws. Requires drilling and tapping of receiver to accept 8-40 tpi screws. Standard and extended 20 MOA heights to fit Remington 700 short action (SA) or long action (LA).*

#080-000-759AT	Rem. 700 SA HD Base, Standard, 8K42E86	\$ 49.99
#080-000-760AT	Rem. 700 LA HD Base, Standard, 8K42N86	49.99
#080-000-761AT	Rem. 700 SA HD Base, 20 MOA, 8K59J97	69.99
#080-000-762AT	Rem. 700 LA HD Base, 20 MOA, 8K59A93	69.99



## BADGER ORDNANCE MAXIMIZED SCOPE RAIL



**Forward Cant Lets You Zero At Extended Range**

Heavy-duty steel base with 20 MOA forward angle increases maximum scope elevation for long range shooting. Machined after hardening to maintain dimensions. Integral recoil lug withstands the hardest kicking calibers. Uses MIL-STD 1913 Picatinny slot pattern for maximum sight mounting possibilities. **Remington Zero Cant** fits 700 short action only and does not have 20 MOA forward angle; use where extra elevation is not required. **SPECS:** *4142 steel, black, matte finish. 7/8" (18.1cm) long, 5.6 oz. (158 g) wt. Rem Zero Cant - 6/4" (15.9cm) long, 4.9 oz. (138g) wt.*

#093-306-070AT	Rem 700 Long Action, 3K137L14	\$ 149.99
#093-306-060AT	Rem 700 Short Action, 3K137G14	149.99
#093-000-012AT	Rem. 700 SA Zero Cant, 3K137P14	149.99
#093-000-018AT	Savage 10 Accu-Trigger, 3K140Q00	149.99
#093-000-005AT	Win 70 Long Action, 3K140J00	149.99
#093-000-006AT	Win 70 Short Action, 3K140C00	149.99

## FARELL INDUSTRIES FG-FORCE SCOPE MOUNT

**Extra "Lug" Adds Recoil Resistance**



CNC-machined base spreads recoil to help keep scopes, even heavy ones, on the gun and precisely zeroed from shot-to-shot. Angled screw wedges against the receiver opening to provide another recoil lug to divert recoil away from the base and mounting screws. Tolerances for straightness and flatness are held within .002". Bedding-compound inletting on mount bottom helps you get a perfect base-to-receiver fit. Self-centering Torx® screws help prevent slipping during use. Accepts Picatinny and Weaver-style rings. Available with or without 20 minutes of elevation (MOA). **SPECS:** *Steel, blue finish. Length approximately equal to action length, 3/16" (1.4mm) high. Savage Round Top fits models with AccuTrigger. Recoil lug screw is 1/4"-28, mounting screws are 6-48.*

STK# STD.	STK# MOA	FITS
#100-001-367AT	#100-001-368AT	Rem. 700 Short
#100-001-365AT	#100-001-366AT	Rem. 700 Long
#100-001-369AT	#100-001-370AT	Sav. 110-116 Long
#100-001-375AT	#100-001-376AT	Sav. 10-16 Short Rd Top
NA	#100-001-374AT	Sav. 110-116 Lng Rd Top
#100-001-377AT	#100-001-378AT	Win. 70 Long

— Advise # — Standard Mount, 8K131J14... \$ 136.99  
 — Advise # — MOA Mount, 8K131D14... 136.99

## DLASK ARMS RUGER® 10/22® PICATINNY SCOPE MOUNTS




**Picatinny Rails For Ruger® 10/22® Rifles**

Tough, lightweight aluminum rails feature Picatinny slot spacing for fast, simple changes to eye relief, plus greater flexibility in scope choice. Three height choices fit various objective sizes, or improve cheek weld. Extends over the barrel, or can be reversed to better position optics with shorter eye-relief. .750" model has an open sight channel that lets you use the factory sights. Uses the factory-drilled scope base holes, with no permanent alteration to your rifle. **SPECS:** *Aluminum, hardcoat anodized, black. 6/8" (16.2cm) long; .375" (.95cm), .500" (1.3cm), or .750" (1.9cm) tall.*

#253-000-003AT	Scope Mount Rail .375", 3E30P78	\$ 35.99
#253-000-004AT	Scope Mount Rail .500", 3E30L78	35.99
#253-000-005AT	Scope Mount Rail .750", 3E30M78	35.99

## CALCULATING REQUIRED SCOPE RING HEIGHT

The following formula provides a quick and effective way to determine proper scope ring height for the majority of rifle scope mounting applications. There are a few applications where the barrel contour will allow the scope to be mounted slightly lower than the calculated measurement, and other instances where a heavy barrel equipped with a rear sight may require a slightly higher scope ring height than calculated. An alternative to using the formula provided here is available in the *Determining Scope Ring Height* video at [brownells.com](http://brownells.com).

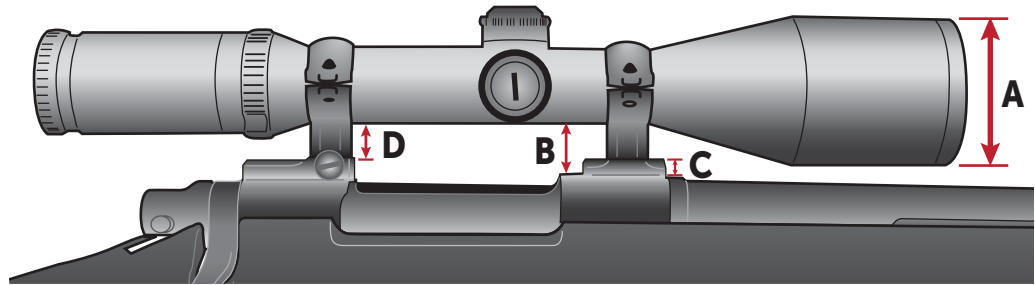

**A =** Outside diameter of scope objective end.

**B =** Distance between top of receiver (where shown) and bottom of scope tube.

**C =** Base Height: Distance from top of receiver to top of front scope base.

**D =** Ring Height: Distance from top of base to bottom of scope tube.

**Scope Ring Height Formula: B - C = D**

## PROCEDURE

1) Measure the outside diameter of the scope objective (A). If using scope covers, make this measurement with the front scope cover in place to ensure proper clearance.

**NOTE:** *Not all scope objectives measure exactly as advertised by the manufacturer, so we recommend measuring with a precision caliper.*

2) Find the objective diameter (A) for your scope in the table to the right.

3) Find the corresponding scope clearance dimension (B) in the table for the tube diameter (1" or 30mm) of your scope.

4) Measure the front base height (C) with a caliper or find this dimension in the manufacturer's literature.

5) Subtract the known front base height (C) from dimension (B) to determine the required ring height (D).

**\*NOTE:** *Subtract known height of the front base from Dimension B in table to determine the actual ring height.*

OBJECTIVE DIAMETER	*1" SCOPE TUBE	*30mm SCOPE TUBE
DIMENSION A	DIMENSION B	DIMENSION B
.984" (25mm)	0" (0mm)	---
1.023" (26mm)	.011" (.27mm)	---
1.062" (27mm)	.031" (.78mm)	---
1.102" (28mm)	.051" (1.29mm)	---
1.141" (29mm)	.071" (1.80mm)	---
1.181" (30mm)	.091" (2.31mm)	---
1.220" (31mm)	.111" (2.81mm)	---
1.259" (32mm)	.130" (3.30mm)	---
1.299" (33mm)	.150" (3.81mm)	---
1.388" (34mm)	.169" (4.29mm)	---
1.377" (35mm)	.189" (4.80mm)	---
1.417" (36mm)	.209" (5.30mm)	---
1.456" (37mm)	.228" (5.79mm)	---
1.496" (38mm)	.248" (6.29mm)	---
1.535" (39mm)	.268" (6.80mm)	---
1.574" (40mm)	.287" (7.28mm)	.197" (5.00mm)
1.614" (41mm)	.307" (7.79mm)	.217" (5.51mm)
1.653" (42mm)	.327" (8.30mm)	.237" (6.01mm)
1.692" (43mm)	.346" (8.78mm)	.257" (6.52mm)
1.732" (44mm)	.366" (9.29mm)	.276" (7.01mm)
1.771" (45mm)	.386" (9.80mm)	.296" (7.51mm)
1.811" (46mm)	.406" (10.31mm)	.316" (8.02mm)
1.850" (47mm)	.425" (10.79mm)	.335" (8.50mm)
1.889" (48mm)	.445" (11.30mm)	.355" (9.01mm)
1.929" (49mm)	.465" (11.81mm)	.375" (9.52mm)
1.968" (50mm)	.484" (12.29mm)	.394" (10.00mm)
2.000" (51mm)	.500" (12.70mm)	.414" (10.51mm)
2.047" (52mm)	.524" (13.30mm)	.434" (11.02mm)
2.086" (53mm)	.543" (13.79mm)	.454" (11.53mm)
2.125" (54mm)	.563" (14.30mm)	.473" (12.01mm)
2.165" (55mm)	.583" (14.80mm)	.493" (12.52mm)
2.204" (56mm)	.602" (15.29mm)	.513" (13.03mm)
2.244" (57mm)	.622" (15.79mm)	.532" (13.51mm)
2.283" (58mm)	.642" (16.30mm)	.552" (14.02mm)
2.322" (59mm)	.661" (16.78mm)	.572" (14.52mm)
2.362" (60mm)	.681" (17.29mm)	.591" (15.01mm)
2.401" (61mm)	.701" (17.80mm)	.611" (15.51mm)
2.440" (62mm)	.720" (18.28mm)	.631" (16.02mm)
2.480" (63mm)	.740" (18.79mm)	.651" (16.53mm)
2.519" (64mm)	.760" (19.30mm)	.670" (17.01mm)
2.559" (65mm)	.780" (19.81mm)	.690" (17.52mm)



Instructional video available at [brownells.com](http://brownells.com)

NEW!

Models

### EGW ONE-PIECE SCOPE MOUNT

Easy, Versatile Scope Attachment For Popular Rifles & Shotguns

Add the versatility of a one-piece Picatinny scope rail to your rifle or shotgun with no drilling or tapping. Precision machined from extruded aluminum or hardened steel with Picatinny slot-and-rail spacing that allows fast and simple changes to eye relief, plus great flexibility in scope choice. Some models available with 20 or 30 MOA built-in elevation to aid in long-range shooting without maxing out scope elevation adjustment. Drilled to fit the factory scope mount holes on the gun's receiver. **Lightweight Tactical** mounts have a milled center channel for weight reduction; hex-head mounting screws and Allen wrench included. **Heavy Duty** mounts are .100" lower than the Lightweight Tactical mounts to minimize weight and keep your optic closer to the barrel centerline for improved accuracy. Full-width cross-slots are gauged to MIL-STD 1913 specs to +/- .002". Machined from ultra-rigid, extruded 7075 T6 aluminum or 4140 chrome-moly steel. Includes socket head Torx® screws and wrench. **SPECS:** *Lightweight Tactical* - 6061 T6 aluminum, anodized, matte black finish. Includes socket head Allen screws and wrench. *Heavy Duty* - 7075 T6 aluminum, mil-spec hardcoat anodized, or 4140 chrome-moly steel pre-hardened to Rc 32-35, mil-spec Parkerized, matte black. Includes Torx screws and wrench.

#### LIGHTWEIGHT TACTICAL SCOPE MOUNTS

Table with columns: STOCK #, FITS, LENGTH, ACTION, MOA, PRICE. Lists various models like #296-000-099AT, #296-000-100AT, #296-000-183AT, etc.

Table with columns: STOCK #, FITS, LENGTH, ACTION, MOA, PRICE. Lists various models like #296-000-101AT, #296-000-229AT, #296-000-230AT, etc.

#### HEAVY DUTY SCOPE MOUNTS

Table with columns: STOCK #, FITS, LENGTH, MATERIAL, ACTION, MOA, PRICE. Lists various models like #296-000-149AT, #296-000-156AT, #296-000-150AT, etc.

### FARREL INDUSTRIES

#### ONE-PIECE SCOPE BASES

Precision-Machined Quality & Innovative Design



Scope bases precision CNC-machined from solid bar stock are held to .002" tolerances to create an exceptionally flat, straight, solid platform for optics. Accepts Picatinny and Weaver-style rings. Bedding-compound groove helps you get an exact, base-to-receiver fit. Self-centering Torx® head screws and chamfered screw holes help prevent slippage under recoil. Available in one-piece **Standard** or **20 MOA** (20 minutes built-in elevation) models. **SPECS:** Steel, black oxide finish. 1/2" (11mm) high from bottom to top of base. *Remington 700 Short* - 5 1/2" (13.8cm) long, 1 1/2" (21mm) wide; others will vary. *Savage RT* fits round top receiver of Savage AccuTrigger models. *Savage 10* and *110*, both old models and RT, also fit corresponding Savage models from 10/110-116/116 series.

Table with columns: STK# 1-PIECE STANDARD BASES, STK# 20 MOA BASES, FITS. Lists models like #100-001-056AT, #100-001-060AT, etc.

— Advise # — One-Piece Standard Base, 8K114K08 . . \$118.99
— Advise # — One-Piece 20 MOA Base, 8K114N08 . . 118.99

#### NIGHTFORCE

#### TAPERED PICATINNY BASES



Provides Extra Elevation For Long-Range Shooting

Rugged, tactical bases cut with MIL-STD 1913 Picatinny slots have built-in elevation adjustment for making long-range shots without exceeding your scope's adjustment range. Machined from steel billet for extreme strength and recoil resistance. One piece bases enable forward scope mounting and include an integral recoil lug that contacts the front of the ejection port. **SPECS:** Steel, black, matte finish. Includes torx screws. *1-Piece* approx. 6 1/2" (17.1cm) long. *2-Piece* approx. 1 1/2" (3.4cm) long each, sold in pairs.

Table with columns: STOCK #, FITS, STYLE, ELEVATION, PRICE. Lists models like #524-000-007AT, #524-000-015AT, #524-000-008AT, etc.

40 MOA REMINGTON 700 BASE - One-piece base provides rock-solid mounting and has 40 MOA of elevation built-in to save your scope adjustments for long-range shots. CNC machined from steel billet

### GG&G RUGER® MINI-14®

#### RANCH RIFLE OPTIC MOUNTS

For Secure Installation Of Scope Or Mini Red Dot With Plenty Of Eye Relief



No-gunsmithing aluminum mount clamps to the receiver notches for the factory scope rings to let you install the latest tactical optics on your Ranch Rifle. Almost 6" long to provide plenty of versatility to position the optic forward for long eye relief and quick target acquisition, while you maintain a comfortable cheek weld. Machined relief cuts on the underside ensure unimpeded cartridge ejection. **Mini Red Dot** model accepts mini red dot holographic sights from Burris, Docter, JP, and Trijicon. **Picatinny** has a standard MIL-STD-1913 rail with 14 slots to accept conventional Picatinny scope rings. **SPECS:** 6061 T6 aluminum, mil-spec Type III hardcoat anodized, matte black. Fits Ruger Mini-14 Ranch Rifle. Mounting screws, adapter plate (Red Dot model only), and instructions included.

#336-000-035AT Mini Red Dot Mount, 6C45Q93 . . . . \$49.99
#336-000-036AT Picatinny Rail Mount, 6C46H14 . . . . 49.99

#### MIDWEST INDUSTRIES AK-47/74 SCOPE MOUNT



Fast On/Off Scope Mount For Kalashnikov Rifles

Install and remove your scope with a twist of a lever with no loss of zero. Lightweight machined aluminum side mount features the ASM Auto Lock System that can be removed then reinstalled in seconds without having to re-adjust or re-zero the scope. Fits AK 47 and AK74 rifles equipped with the built-in AK side receiver interface. Mount keeps the scope low, directly above the top cover for fast target acquisition. Scope rail is built to 1913 Picatinny specs and will accept all Picatinny scope rings or mounts. **SPECS:** 6061 aluminum, anodized finish, black, 6 3/4" (17cm) long. 7.3 oz.(206g) wt.

#100-009-103AT MI AK-47/74 Scope Mount, 2A109J99 . . . . . \$109.99

#### NODAK SPUD RUGER® 10/22® PICATINNY RAIL W/REAR SIGHT

Gives Your 10/22® A Picatinny Rail & Backup Rear Sight



Machined aluminum Picatinny rail fits on top of factory 10/22 receivers to provide versatile mounting space for optics. Includes a windage/elevation-adjustable rear sight adjustable for elevation and windage. Simply screws into factory holes standard in 10/22 receiver with the included Torx head screws. Gives a sight picture similar to an AR-15 with 10-position windage drum. **SPECS:** Machined T6 6061 aluminum billet, hardcoat anodized, matte black finish. Includes 4 Torx screws.

#100-012-174AT 10/22 Rear Sight w/Rail, 4C71G79 . . . \$74.99

for extreme strength. **SPECS:** Steel, black, matte finish. Includes 6-48 torx screws. Approximately 6 1/2" (17.1cm) long. For long (LA) or short actions (SA).
#524-000-015AS 1 Piece Rem 700 LA 40 MOA, 2E116B00 . . . . . \$116.00
#524-000-016AS 1 Piece Rem 700 SA 40 MOA, 2E116I00 . . . . . 116.00

Orders/Tech: 800-741-0015

order on the web brownells.com

BROWNELLS PAGE 253

RINGS & BASES

RIFLE

## FULTON ARMORY M14/M1A PICATINNY SCOPE MOUNT



Secure, Stable, No-Gunsmithing  
Scope Attachment

One piece, steel mount provides a secure, stable scope base that won't shift between shots. Rock-solid, three-point mounting system attaches to the factory scope mount screw hole in the receiver and the charger guide dovetail, while the setscrew at the front uses the receiver ring as a stop to prevent forward movement. No drilling or tapping required; mounting hardware included. Machined from the same type of steel as the M14 receiver, so mount and receiver expand at the same rate as the gun heats up to help keep your optic zeroed during prolonged fire. Thirteen MIL-STD 1913 Picatinny cross-slots offer plenty of versatility in setting eye relief. Sight channel allows use of iron sights without removing the scope. Cutout above ejection port helps prevent case hangups. **SPECS:** 8620 steel, Parkerized, matte black finish. 5/16" (1.4cm) long, 1/2" (3.8cm) wide, 2" (5.1cm) tall. 11.6 oz. (329g) weight. All mounting hardware included. Minor fitting required.

#100-005-275AT Scope Mount, 3K224C07..... \$225.99

## HAVLIN MOSSBERG .22 RIFLE M22 SUPER SIDE SCOPE MOUNT

Update Your Vintage Rimfire  
With Your Choice Of Optics



Weaver-style rail conforms to receiver curvature and attaches to existing mounting holes, centering any diameter scope directly over the barrel. Lets you mount full-size scopes and red-dot optics. Provides enough clearance to keep original rear sights in place. Easy installation: remove bolt cover, if present, add rings and scope of choice. **SPECS:** Aluminum, black anodized finish. Rail measures 4/16" (11.3cm) long, 3/16" (1.4cm) high. Fits following models with side-tapped receiver: 26B, 26C, 42A, 42B, 42C, 42M (all variants), 43, 44B, 44US (all variants), 46A, 46B (all variants), 46M (all variants), and most Wards-Westernfield rifles (made by Mossberg) with side-tapped holes measuring 1/16" (4.1cm) center-to-center.

#100-001-258AT M22 Scope Mount, 6A26H53..... \$27.99

## PRECISION ARMAMENT REMINGTON 700 PICATINNY SCOPE RAIL



Lightweight Mount With  
The Strength Of Steel &  
Only 1/3 The Weight

MIL-STD 1913 Picatinny rail is machined from lightweight Tennifer® 7068 alloy that gives the same strength as steel with only 1/3 the weight. All contact surfaces are stress relieved and pre-ground before final machining to exact MIL-STD 1913 dimensions. Integral recoil lug and elongated mounting screws let you position the rail so the lug will bear properly against the receiver to prevent the rail from moving even under aggressive recoil. Built in 20 MOA of elevation for extended long-range shooting. All surfaces are fully chamfered, with extra clearance over the ejection port. **SPECS:** Tennifer® 7068 alloy, hardcoat anodized, matte black finish. Instructions and 6-48 mounting screws included. **Short Action (SA)** - 6 1/2" (16.5cm) long, .380" (9.4mm) high at front ring, 2.3 oz. (.65g) wt. **Long Action (LA)** - 7" (17.7cm) long, .380" (9.4mm) high at front ring, 2.5 (70g) wt.

#100-011-239AT Rem 700 Picatinny Scope Rail, SA, 2D115F21..... \$119.99

#100-011-240AT Rem 700 Picatinny Scope Rail, LA, 2D115K21..... 119.99

## KWIK-SITE KWIK-MOUNT® ADAPTER BASE



Lets You Use Weaver-Style Rings On  
Any 3/16" Dovetailed Receiver

Weaver-style conversion bases let you mount optics on any .22 caliber rifle with a 3/16" dovetailed receiver. One-piece model has eight slots that allow you to vary the ring spacing and mount a variety of different eye-relief scopes. Two piece model, with a single slot on each base, ensures the correct ring spacing, while preserving easy access to the chamber. Made of aluminum to keep additional weight to a minimum with steel cross-bolt and clamping bar for a tight hold. **SPECS:** Aluminum with steel hardware, matte black finish. **1-Piece** - 4.3" (10.9cm) long, **2-Piece** - 8" (2.1cm) long, each.

#100-005-941AT 1-Piece Adapter Base, 8B26N38..... \$29.99

#100-005-940AT 2-Piece Adapter Base, 8B11Q06..... 12.99

## PRECISION REFLEX REMINGTON 7615 PICATINNY RAIL SCOPE BASE

Mounts Tactical Sights  
& Optics For Maximum  
Accuracy



Precision machined, MIL-STD 1913 Picatinny rail allows mounting optics and tactical sights for maximum accuracy. Low profile design features fourteen cross-slots for easy ring spacing adjustments to accommodate different-length scope tubes. Four, steel, 8-40 Allen head screws secure rail to receiver for exceptional holding power. Precision machined from 6061-T6 aluminum, then hardcoat anodized for added strength. Easy installation using factory pre-drilled scope base holes, requires no alterations to rifle. Accepts both Picatinny and Weaver-style rings. **SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. 6" (15cm) long, 1.4 oz. (40g) weight. Includes steel mounting screws. Fits all Remington 7615 pump action rifles with factory drilled and tapped receivers.

#714-000-009AT Rem 7615 Picatinny Base, 4A56G21... \$62.99

## POWER CUSTOM RUGER® 10/22® RECEIVER MOUNT



Versatile Mount For Compact  
Scopes & Sights

Quickly attaches to factory drilled and tapped 10/22 receivers. Six, cross slots provide the versatility to mount full size scopes, plus red dot sights or compact scopes using Weaver-style rings. Silver anodized or hard coat, black finish matches factory receiver. **SPECS:** T6061 Aluminum, silver, anodized or hard coat, black finish. 4.75" (12cm) long. Includes screws and Allen wrench.

#713-122-101AT Silver 10/22 Receiver Mnt, 3A13L69... \$14.99

#713-122-100AT Black 10/22 Receiver Mnt, 3A14I23... 14.99

## SAMSON AK-47 REAR SIGHT RAIL

No-Gunsmithing Optic Mount  
With Backup Rear "Iron" Sight



An easy way to add a tactical optic to your Kalashnikov, this steel mount replaces the rear sight on any AK-pattern rifle to enable mounting of a red dot or holographic sight. MIL-STD 1913 Picatinny slots provide a rock-solid attachment point for the optic that won't shift during extended-fire sessions. Easy to install - requires no permanent modification to the rifle.

## RS PRODUCTS AK-47/AKM AKM SCOPE MOUNT



For Easy, Secure Installation  
Of 30mm Red Dot Sight

Incredibly versatile mounting system clamps directly to side rail of Kalashnikov-pattern rifles for "bank-vault" strong attachment of optics. Unique design positions optic directly over the centerline to allow it to co-witness with iron sights and features a quick release lever that allows the optic to be removed and reinstalled without tools. Two-piece design gives options for mounting position and eye relief. **Front Lower Mount** gives 3" mounting space along the front half of the receiver. **Rear Lower Mount** gives 3" mounting space along the rear half of receiver. **Full Length Lower Mount** gives 6" mounting space along the receiver.

**AK310 Full Length Lower Rail** fits Romanian M10 and Yugo OPAP and NPAP rifles. **30mm Upper Mount** gives a single-ring attachment for 30mm red dot optic. **AKML Upper Mount** fits the Aimpoint T-1 and H-1. **AKOG Upper Mount** fits Trijicon ACOG sight system. Complete system requires one upper mount and one lower mount. **AKR Upper Mount** gives Picatinny upper rail that fits onto any RS Regulate lower mount. All mounts sold separately. **SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. **Front Lower Mount** - 6" (15.2cm) long, 2 1/4" (5.7cm) high. **Rear Lower Mount** - 5" (12cm) long, 2 1/4" (5.7cm) high. **Full Length Lower Mount** - 6 1/4" (15.8cm) long, 2 1/4" (5.7cm) high. **AK310 Full Length Lower Rail** - 6" (15.8cm) long, 1.9" (4.8cm) high. **30mm Upper Mount** - 1" (2.5cm) long, 2" (5cm) high. **AKML Upper** - 1 1/2" (4.6cm) long, 1 1/8" (2.38cm) high. **AKOG Upper Mount** - 3 1/8" (9.2cm) long, 1 1/8" (2.38cm) high. **AKR Picatinny** - 5" (12.7cm) long, 1 1/4" (3.1cm) high.

#100-011-182AT Rear Lower Mount, 2D00QDF..... \$121.00

#100-011-183AT Front Lower Mount, 2D00PWP..... 121.00

#100-011-181AT Full Length Lower Mnt, 2D00GPK... 121.00

#100-013-589AT AK310 Full Length Lower Rail, 2D00CHA..... 121.00

#100-011-184AT 30mm Upper Mount, 2D00CWR.... 65.00

#100-011-560AT AKML Red Dot Upper Mount, 2D00KCC..... 65.00

#100-011-561AT AKOG Upper Mount, 2D00GXP..... 73.00

#100-011-749AT AKR Picatinny Mount Upper Rail, 2D00ETC..... 73.00

**VZ 59 Rear-Biased Lower Rail** - fits VZ 58 rifles with mounting rail on side of receiver. Lower rail specially shaped to help put the optic near to the shooter's eye, and wind-age adjustments let you position the optic directly over center bore. Optic position can be permanently staked in. Accepts all RS Regulate upper optic mounts. **SPECS:** 6061 T-6 Aluminum, hardcoat anodized, matte black. 4.7" (11.9cm) long, 2.1" (5.3cm) high.

#100-013-590AT VZ 58 Rear-Biased Lower Rail, 2D00AGK..... \$121.00



Channel through the length of the mount has a built-in rear sight that works with factory front sight for iron sight backup in the event of optic damage, failure, or battery run-down. **SPECS:** Machined steel, black oxide finish. 3 1/2" (8.9cm) long, 3.5 oz. (99g) wt. Rail fits all AK-pattern rifles with a rear leaf sight. All mounting hardware included.

#100-006-266AT AK-47 Rear Sight Rail, 1B103F47... \$114.99

## PRO MAG M14/M1A TACTICAL SCOPE MOUNT



Easy-To-Install, Rock Solid; No  
Permanent Alterations To Rifle

All-steel, bolt-on mount provides a rock solid platform for a scope, red dot, or other holographic sighting device on an M14-type rifle. 13-slot rail accepts Picatinny or Weaver-style rings. Three anchor points on receiver make sure the mount won't shift under recoil, so there's no loss of zero. Sight channel allows use of the original iron sights without removing scope. Requires removal of stripper clip guide. No permanent modification required. Installation instructions and tools included. Minor fitting may be required. **SPECS:** Machined 4150 chrome-moly steel, heat treated to Rc 55, phosphate coated, matte black finish. 5 1/8" (13.6cm) long, 1 1/8" (3.5cm) wide, 1 1/8" (4.7cm) high. 11.9 oz. (337g) weight.

#687-000-035AT M14/M1A Steel Scope Mount, 7H112A33..... \$131.25

## S&K INSTA SCOUT MOUNTS

Fast To Install;  
No Permanent Alterations



Lightweight, machined aluminum mounts deliver the increased accuracy of Scout Rifle optical sighting without changing or altering the original configuration of your prized military rifle. All models replace the standard issue rear sight assembly, so you can mount intermediate eye relief scopes over the handguard for fast, both-eyes-open aiming. Requires no drilling, tapping or permanent alterations to the rifle. Accepts Weaver-style rings and accessories. **SPECS:** Aluminum, anodized, black, matte finish. May not fit all variants of models listed. Includes instructions.

#794-000-008AT Schmidt Ruben K31 Mnt, 4G55F28... \$69.99

#794-000-009AT Mauser 98 K Mount, 4G53K47..... 62.99

#794-000-010AT Yugo 48, 4G55L53..... 69.99

## SMITH ENTERPRISE M14/M1A PICATINNY SCOPE MOUNT



All Steel, Solid, Three-Point  
Attachment

Fully-machined hardened steel Picatinny mount with three-point mounting, provides a stable, secure base for mounting large objective scopes. Easily clamps to the charger guide dovetail and receiver mount lug without modifications to rifle. Heavy, forward locking screw gives rock solid stability at the receiver ring. Sight channel allows back-up use of iron sights without removing scope. Available in **Standard** 5 1/8" or **Extended** 7" length for added sight mounting options. **Tactical** model features a Picatinny rail but without the open sight channel. Absolutely can't give under the tightest clamping torque. All model accept Weaver-style rings. **SPECS:** 4140 steel, nitride finish, black. Hardened to Rc 60-62. **Standard** - 5 1/8" (13.6cm) long, 1.875" (4.7cm) high, 10.9 oz (310 g) wt. **Extended** - 7" (17.7cm) long, 1.85" (4.7cm) tall, 15.3 oz. (435g) wt. **Tactical** - 5 1/8" long, 1.875" high, 13.3 oz. (378g) wt.

#851-000-001AT Std. M14/M1A Picatinny Mount, 1E299G99..... \$299.99

#851-000-061AT 7" M14/M1A Picatinny Mount, 1E299A99..... 299.99

#851-000-033AT Tactical M14/M1A Picatinny Mount, 1E469D99..... 469.99

SATISFACTION GUARANTEED  
SINCE 1939

**SADLAK INDUSTRIES M14/M1A TACTICAL SCOPE MOUNT**

Maximum Support, Superior Strength-To-Weight Ratio

Helps keep the weight down when adding heavy tactical optics to your M14/M1A. Three-point design clamps down solidly, without alteration, to the side receiver ring, charger guide dovetail and receiver mount lug. Precision-cut rail includes 5° angle milled on the underside for easy case ejection without hang-ups; accepts Picatinny and Weaver-style rings. Open sight channel gives unobstructed view of back-up iron sights. Standard model is available in three strength-to-weight combinations. **Steel** model is fully machined from stress-relieved 4142 chrome-moly steel barstock, hardened to Rc 28-32 for maximum strength. **Aluminum** model is machined from 7075 bar stock aluminum and hardcoat anodized matte black for durability. **Airborne** model features a lightweight skeletonized frame with seven, 3/8" diameter CNC machined lightening holes in the top of the rail for reduced weight without sacrificing strength. Machined from chrome-moly steel bar stock and heat-treated to Rc 50 for superior strength. Mil-Spec Parkerized finish resists abrasion and corrosion. Adopted by the 101st Airborne. **SPECS:** 5 1/8" (13.8cm) long, 2" (5.1cm) wide, 1 1/4" (4.4cm) high. Includes mounting hardware, Allen wrenches, and complete instructions. **Steel** - 4142 chrome-moly steel, hardened to Rc 28-32, mil-spec manganese phosphate Parkerized, matte black. 11.8 oz. (334g) wt. **Titanium** - Titanium, black, nitride finish. Base hardness Rc 34, surface hardness Rc 85. 7.3 oz. (207g) wt. **Aluminum** - 7075 aircraft aluminum bar stock, hard coat anodized, black, matte finish. 4.3 oz. (123g) wt. **Airborne** - Steel, chrome-moly, Parkerized, black, matte finish. 9.4oz. (266g) wt.



- #100-005-434AT Steel Scope Mount, 6A242B49 ..... \$ 259.99
- #100-002-407AT Alum. Scope Mount, 6A130D67 ..... 145.99
- #100-003-841AT Airborne Scope Mount, 6A277D64... 299.99

**SWISS PRODUCTS SCHMIDT-RUBIN K31 SCOPE MOUNT**

Helps Achieve The Accuracy These Rifles Are Famous For

Sturdy, machined aluminum mounts let you improve sighting and accuracy. Compact and lightweight, with a full-length rail that accepts 3/8" scope rings. **Clamp-On** mount positions the scope along the right side of the receiver. Does not interfere with bolt operation and requires no modifications to rifle. **Permanent Mount** positions scope to the left side of the receiver. Requires drilling and tapping for three, 10-32 screws. **SPECS:** Aluminum, anodized, black finish. **Clamp-On** - 5/8" (13.7cm) long, 1" (2.5cm) high. **Permanent Mount** - 3/8" (8.9cm) long, 3/8" (15.8mm) high.

- #100-000-725AT Aluminum K31 Clamp-On Mount, 7K68H11 ..... \$ 74.99
- #100-000-726AT Aluminum K31 Permanent Mount, 7K52C62 ..... 64.99

**ULTIMAK AK-47 SCOPE MOUNT**

Low Mount Lets You Use Optics Or Iron Sights

Lightweight, aluminum mount replaces the gas tube to maintain scope alignment and prevent shifting zero. Weaver-style base sets below the line of sight, no need to remove mount to use iron sights. Issue sights can be viewed directly through the red dot and reflex scopes. **SPECS:** 6061-T6 Aluminum, black, matte finish. 6 1/8" (17.5cm) long, 6.7 oz. (189 g) wt. Fits all 7.62x39 caliber rifles. Installation may require minor inletting to handguard.

- #100-000-497AT AK-47 Scope Mount, 5K00MLA ..... \$ 94.99



**SPUHR IDEAL SCOPE MOUNT SYSTEM**

Multiple Accessory Attachment Points & A Built In Level

Revolutionary scope mount allows you to attach multiple accessories to it while an integrated level provides accurate readings of the rifle's cant. Mount has seven different locations where accessories or short Picatinny rails can be directly attached, including two at 45° angle. Built in level will not shift and has no protruding parts or edges to get in the way. Cut at a 45° angle, rings have low, flat areas on the top and sides for an unobstructed view of the scope turrets. Lines milled into the top and right side of rings serve as indicator lines for the scope. Machined from a single piece of aluminum, this extremely sturdy mount will not flex under heavy recoil, protecting the scope from being damaged. Mount comes with a 10° indexing wedge that slips between the scope and mount to insure the scope is perfectly level. *Some items ship directly from manufacturer. Please allow 2 additional business days for shipping.* **SPECS:** 7075 T651 aluminum, sealed hardcoat anodized, matte black. Height measured from the top of the rail to the center of the scope.



STOCK #	DIA.	HT	LGTH	MOA	PRICE
<b>PICATINNY RAIL MOUNT</b>					
#100-018-266AT	30mm	1.2"	5"	0	1E410J00 \$ 410.00
#100-011-207AT	30mm	1.2"	5"	20.6	1E410M00 \$ 410.00
#100-018-267AT	30mm	1.3"	5"	0	1E410M00 \$ 410.00
#100-018-268AT	30mm	1.5"	5"	0	1E410L00 \$ 410.00
#100-018-269AT	30mm	1.5"	5"	20	1E410L00 \$ 410.00
#100-018-270AT	34mm	1.2"	4.7"	0	1E410K00 \$ 410.00
#100-011-208AT	34mm	1.2"	4.7"	20.6	1E410M00 \$ 410.00
#100-018-271AT	34mm	1.2"	4.7"	31	1E410G00 \$ 410.00
#100-018-272AT	34mm	1.2"	4.7"	44.4	1E410N00 \$ 410.00
#100-018-273AT	34mm	1.3"	4.7"	0	1E410L00 \$ 410.00
#100-018-274AT	34mm	1.5"	4.7"	0	1E410E00 \$ 410.00
#100-018-275AT	34mm	1.5"	4.7"	10.3	1E410P00 \$ 410.00
#100-018-276AT	34mm	1.5"	4.7"	30	1E410F00 \$ 410.00
#100-018-277AT	34mm	1.5"	4.7"	44.4	1E410Q00 \$ 410.00
#100-018-278AT	34mm	1.5"	5.8"	20.6	1E410K00 \$ 410.00
#100-018-279AT	34mm	1.5"	5.8"	20.6	1E410L00 \$ 410.00
#100-018-280AT	34mm	1.5"	5.8"	40	1E410C00 \$ 410.00
#100-018-281AT	34mm	1.5"	4.7"	0	1E410A00 \$ 410.00
#100-018-282AT	34mm	1.7"	4.7"	0	1E410J00 \$ 410.00
#100-018-283AT	34mm	1.9"	4.7"	0	1E410A00 \$ 410.00
#100-018-284AT	34mm	1.9"	4.7"	44.4	1E410D00 \$ 410.00
#100-018-285AT	35mm	1.2"	5.5"	0	1E410K00 \$ 410.00
#100-018-286AT	35mm	1.2"	5.5"	20.6	1E410F00 \$ 410.00
#100-018-287AT	35mm	1.3"	5.5"	0	1E410N00 \$ 410.00
#100-018-288AT	35mm	1.5"	5.5"	0	1E410J00 \$ 410.00
#100-018-289AT	35mm	1.5"	5.5"	20.6	1E410I00 \$ 410.00
#100-018-290AT	35mm	1.2"	5"	0	1E410G00 \$ 410.00
#100-018-291AT	35mm	1.5"	5.5"	0	1E410Q00 \$ 410.00
#100-018-292AT	35mm	1.3"	5.5"	0	1E410P00 \$ 410.00
#100-018-293AT	35mm	1.2"	5.5"	20.6	1E410C00 \$ 410.00
#100-018-294AT	35mm	1.5"	5.5"	20.6	1E410G00 \$ 410.00
#100-011-209AT	38mm	1.5"	4.7"	20.6	1E410G00 \$ 410.00
<b>PICATINNY (AR) CANTILEVER MOUNT</b>					
#100-018-297AT	30mm	1.26"	5.5"	0	1E450P00 \$ 450.00
#100-018-295AT	30mm	1.46"	5.9"	0	1E450D00 \$ 450.00
#100-018-298AT	34mm	1.26"	5.5"	0	1E410B00 \$ 410.00
#100-018-296AT	34mm	1.46"	5.9"	0	1E450K00 \$ 450.00
#100-018-263AT	30mm	1.4"	4.9"	20.6	1E410I00 \$ 410.00
#100-011-211AT	34mm	1.4"	5.9"	20.6	1E450G00 \$ 450.00

**SOUTH SHORE TARGET SCOPE BASE**

Mount Target Sights Or External Adjustment Scopes On Long Range Rifles

Versatile, steel bases accept target front sights and external adjustment scopes from Lyman, Unertl and others that require a 3/8" dovetail base. Contoured bottom radius provides a tight fit to barrel, prevents side movement. Does not fit Redfield external adjustment scopes. **SPECS:** 1018 steel, blue, matte finish. 1 1/8" (3.5cm) long, 3/16" bottom radius. .860" and .562" hole spacings. Includes 6-48 screws.



STOCK #	HEIGHT	PRICE
#841-105-175AT	.175" Base	1D10L02 \$ 14.95
#841-105-225AT	.225" Base	1D10H02 \$ 14.95
#841-105-275AT	.275" Base	1D10C02 \$ 14.95
#841-105-325AT	.325" Base	1D10B02 \$ 14.95
#841-105-425AT	.425" Base	1D10M02 \$ 14.95

STOCK #	DIA.	HT	LGTH	MOA	PRICE
<b>ACCURACY INTERNATIONAL DIRECT MOUNT</b>					
#100-018-261AT	34mm	1.4"	4.7"	20.6	1E410F00 \$ 410.00
#100-018-262AT	34mm	1.4"	4.7"	44.4	1E410L00 \$ 410.00
<b>FITS TRG DIRECT MOUNTS</b>					
#100-018-299AT	30mm	1.4"	4.9"	24	1E410H00 \$ 410.00
#100-018-300AT	34mm	1.4"	4.7"	24	1E410L00 \$ 410.00
#100-018-301AT	34mm	1.4"	4.7"	44.4	1E410P00 \$ 410.00
#100-018-302AT	34mm	1.7"	4.7"	24	1E410J00 \$ 410.00
#100-018-303AT	34mm	1.7"	4.7"	44.4	1E410L00 \$ 410.00
<b>FITS SAUER</b>					
#100-018-304AT	30mm	1.4"	4.7"	20.6	1E410H00 \$ 410.00
#100-018-305AT	34mm	1.4"	4.7"	31	1E410C00 \$ 410.00

**ACCESSORY INTERFACE MOUNTS**

Mounts allow you to customize your Spuhr mounts and scope rings, with the addition of sights or other accessories. Compact Spacers permit secondary sights or other accessories to be positioned at the optimum height. The **Angle Cosine Indicator** attaches directly to the mount and is available in a QD model that can be removed during QCB or similar situations. **Red Dot Interface** allows you to directly mount a holographic sight to the top or side of the ISMS. The short **Picatinny Rail** sections mount directly to the ISMS and provide a platform for attaching additional accessories. *Ships directly from manufacturer. Please allow 10 additional business days for shipping.* **SPECS:** 7075 aluminum, hardcoat anodized, matte black.



#100-018-250AT	4mm Spacer, 1E29P50	\$ 29.50
#100-018-251AT	10mm Spacer, 1E29M50	29.50
#100-018-255AT	ACI Interface for QD, 1E116D00	116.00
#100-018-256AT	ACI Interface Non QD, 1E73I00	73.00
#100-018-257AT	Delta Point Interface, 1E60J00	60.00
#100-018-258AT	Delta Point Interface, 1E60E00	60.00
#100-018-259AT	DR-Burris Interface, 1E60J00	60.00
#100-018-260AT	Aimpoint Micro Interface, 1E71Q00	71.00
#100-018-252AT	.39" H x 2.16" L Picatinny Rail, 1E63M00	63.00
#100-018-253AT	.55" H x 2.95" L Picatinny Rail, 1E60A00	60.00
#100-018-254AT	.79" H x 2.95" L Picatinny Rail, 1E60C00	60.00

**TACTICAL SOLUTIONS RUGER® 10/22® PICATINNY SCOPE MOUNT**

Standard & 15 MOA Models

Precision CNC machined from light-weight, 6061 T6 aluminum with MIL-STD 1913 Picatinny rail pattern allows mounting a variety of sights. Easily accommodates different-length scope bodies and provides generous adjustment for eye relief. Drilled to fit the factory hole spacing and includes mounting screws. Accepts both Picatinny and Weaver-style rings. Hardcoat anodized for durability. Available with 0 MOA base, or 15 MOA base to help maintain your scope's full elevation adjustment range when shooting at long range. **SPECS:** 6061 T6 aluminum, hardcoat anodized, black, matte finish. 4 1/8" (11.7cm) long, 1 1/8" (2.1cm) wide, 1 1/2" (8.7mm) high from top of receiver.

- #100-003-819AT 0 MOA Scope Mount, 8K36J99 ..... \$ 36.99
- #100-003-820AT 15 MOA Scope Mount, 8K31G50 ..... 33.99

**ULTIMAK M14/M1A/M1 GARAND FORWARD OPTIC MOUNT**

For Easy Forward Mounting Of Optics



One-piece aluminum Picatinny rail mount replaces the handguard - no gunsmithing! - to give your rifle a mounting platform for an intermediate eye relief scope, red dot, holographic or reflex sight. Low profile enables co-witnessing of the factory sights with red dot sights. Recoil lug, plus dual clamps attach quickly to any standard weight barrel without modifications. Mount remains in place during field stripping. **SPECS:** Aluminum, hardcoat anodized, matte black. Mounting hardware and instructions included. **M14/M1A** - 12 1/8" (31.9cm) long, 12.4 oz. (352 g) wt. Fits M14/M1A family of rifles. **M1 Garand** - 9 1/8" (23cm) long, 6.5 oz. (184g) wt.

- #100-002-948AT M14/M1A Forward Optic Mount, 5K190N99 ..... \$ 199.99
- #100-007-347AT M1 Garand Forward Optic Mount, 5K176M94 ..... 185.00

**ULTIMAK M1 CARBINE M6-B FORWARD OPTIC MOUNT**

Cantilever Design Mounts Scopes & Optics To Your .30 Carbine



Get the full accuracy potential from your M1 Carbine by replacing its handguard with a reliable, CNC-machined mount for extended eye relief scopes, red dot, reflex, and laser sights, or tactical accessories. Low profile rail uses 1913 Picatinny pattern; provides excellent stability. Dual, high-strength, steel clamps secure mount to barrel, forward of the gas block. No need to remove standard issue iron sights and will not interfere with case ejection. **SPECS:** Mount - 6061-T6 aluminum, hard anodized, matte black. 8 1/8" (20.5cm) long. Clamps - 4140 steel, matte blue. Fits standard, G.I. pattern, M1 carbines without alteration. May require minor stock inletting on synthetic and I.A.I. stocks. Will not fit Universal brand carbines.

- #100-001-780AT M6-B Forward Optic Mnt, 5K90P15... \$ 99.99

Follow Us • Friend Us • Like Us  
Go online for special promotions, contests and news.  
Leave your comments or suggestions!

### ULTIMAK MINI-14®/MINI THIRTY® SCOUT SCOPE MOUNT



Use Iron & Optic Sights Without Reconfiguration

Low profile mount clamps directly to the barrel for added stability. Positioned below the line of sight - no need to use a raised cheekpiece for proper hold. MIL STD 1913 Picatinny rail. No gunsmithing, drop-in installation. **■**

**SPECS:** 7075-T6 aluminum, Mil-Spec hardcoat anodized, matte black finish. Includes mounting screws and illustrated instructions. **Mini-14** - 10 1/8" (26.4cm) long. Fits Standard and Ranch rifles. Fits rifles with pre-580 serial number prefix. **Mini Thirty** - Fits all Mini Thirty rifles manufactured before 2008 with factory original barrel. **Late Model 14/Thirty** - Fits Mini-14 rifles made since 2008 and Mini Thirty rifles from early production to present, both with factory original barrels.

- #100-000-960AT Mini-14 Scout Mount, 5K139I25 . . . . . \$ 145.99
- #100-002-790AT Mini Thirty Scout Mnt, 5K139A25 . . . . . 145.99
- #100-009-314AT Late-Model Mini-14/Thirty Scout Mount, 5K132J95 . . . . . 139.00

### VOLQUARTSEN 10/22® EXTENDED PICATINNY SCOPE MOUNT

Maximum Versatility For Mounting Bigger Optics



CNC machined, aluminum alloy mount installs easily on 10/22 receivers, is made to Picatinny specifications and gives you a rugged, stable platform for your optics. .480" tall, versatile, extended length of 7" allows plenty of mounting space for your choice of accessories, especially scopes with large objective lenses. Extends 2" forward of the receiver with 17 cross slots to choose from. Four mounting screws included. Available in black **B**, or silver **S**. No gunsmithing required. **■**

- SPECS:** CNC machined aluminum, black (B) and silver (S). 7" (17.8cm) long, 1 1/8" (2.2cm) wide, .480" (1.2cm) tall.
- #930-000-044AT Extended Mount, S, 3Z49P45 . . . . . \$ 54.99
  - #930-000-045AT Extended Mount, B, 3Z49A45 . . . . . 54.99

### XS SIGHT SYSTEMS RUGER GSR RUGER SCOUT RIFLE RAIL



Rugged, Full-Length Rail With Open Sight For The GSR

This full-length, Picatinny rail bolts right on to the Ruger GSR Scout Rifle (GSR) with no gunsmithing required. The rugged, 11 1/2" rail provides a stable platform for standard optics over the receiver or for Intermediate Eye Relief scopes mounted farther forward in the classic scout configuration preferred by Jeff Cooper. A built-in, adjustable rear aperture sight provides a handy backup in case the primary optic fails. Fits Ruger GSR only. **■**

- SPECS:** Aluminum, matte black anodized. 11 1/2" length. Includes mounting hardware and threadlocker.
- #006-000-175AT Ruger Scout Rifle Rail, 6K85M17 . . . . . \$ 93.60

### XS SIGHT SYSTEMS SCOUT SCOPE MOUNT

Provides Wide Field Of View & Fast Targeting



Puts a long eye relief scope just ahead of the receiver. Attaches with two screws and accepts Weaver-style rings. Models 099 fits large-ring Mauser 98 military barrels (.980" O.D. just forward of receiver) and requires Acraglas® for installation (included).

### WEIGAND COMBAT RUGER® RIFLE ONE-PIECE SCOPE MOUNT



Lots Of Slots For Flexible Ring Spacing; Drop-On Installation

Provides additional flexibility when mounting shorter scopes or electronic sights. Requires no modifications to gun; quickly attaches to Mini-14® Ranch Rifle, Mini Thirty®, PC9, PC40, and 10/22® Magnum. Positions the scope low over the receiver for improved balance and better eye alignment. Lightweight aluminum keeps weight to a minimum. Available in Weaver-style or Picatinny; Weaver-style accepts all Weaver-style rings, plus Pro-Point and scopes with built-in Weaver-style ring clamps. **■**

**SPECS:** Aluminum, black or silver, anodized finish; Picatinny only available in black. 5" (12.7cm) long, 2.6 oz. (74 g) weight.

- #957-000-032AT Weaver Ranch Rifle Mount, Black, 7E44I31 . . . . . \$ 49.95
- #957-095-014AT Weaver Ranch Rifle Mount, Silver, 7E44K31 . . . . . 49.95
- #957-000-053AT Picatinny Ranch Rifle Mount, Black, 7E44H61 . . . . . 49.99

**10/22® SCOPE MOUNT** - Fast, simple, scope base installation for any factory drilled Ruger 10/22 rifle. Lightweight, aluminum scope base matches the factory hole pattern and accepts Weaver-style rings. Black anodized finish complements the factory finish. **■**

**SPECS:** Aluminum, black anodized. 4 1/8" (12cm) long, 1/8" (22mm) wide, .8 oz. (24g) wt. Screws included.

- #957-106-010AT 10/22 Base, Black, 7E23K32 . . . . . \$ 24.95

**10/22 & 77/22® PICATINNY SCOPE MOUNT** - Machined aluminum mount installs easily on your rifle's receiver. Made to Picatinny specifications to give you a rugged, stable platform for your optics. Eleven cross slots ensure optimum scope placement for perfect eye relief. Screw holes line up precisely with factory receiver scope base hole pattern for quick, simple installation. Accepts Picatinny or Weaver-style rings. **■**

**SPECS:** Aluminum, black, matte, anodized finish. 10/22 - 4 1/4" (12.07cm) long, 1/2" (12.7mm) tall from top of receiver. 77/22 - 5 1/8" (13.3cm) long, 1/2" tall from top of receiver. Screws included.

- #957-000-067AT 10/22 Pic Scope Base, 7E23D32 . . . . . \$ 24.95
- #957-000-077AT 77/22 Pic Scope Base, 7E54K38 . . . . . 59.99

**77/22® & 77/44® SCOPE MOUNT** - Clamps to factory ring cuts; keeps mounting height low and over the receiver. Lots of slots for Weaver-style rings. 77/22 fits .22 LR and .22 Magnum. 77/44 also fits 77/22 Hornet. **■**

**SPECS:** Aluminum, black or silver, matte finish. 5" (12.7cm) long.

- #957-000-046AT 77/22 Scope Mount, Black, 7E44I35 . . . . . \$ 49.99
- #957-000-047AT 77/22 Scope Mount, Silver, 7E44B35 . . . . . 49.99
- #957-000-056AT 77/44 Scope Mount, Black, 7E44F35 . . . . . 49.99

For commercial bolt action sporters with tapered barrels, order 106 mount; requires turning barrel to 1.05" dia. for a minimum length of 1 1/2" forward of the receiver. **■**

**SPECS:** 6063 T6 Aluminum, black, anodized finish. 6" (15.2cm) long. 3.2 oz. (90 g) wt. Includes instructions. Measure barrel just forward of receiver for fitting.

- #006-109-099AT 099 Military Mount, 6K58P51 . . . . . \$ 63.90
- #006-109-106AT 106 Sporter Mount, 6K58N50 . . . . . 63.90

### VOLQUARTSEN RUGER® 10/22® BARREL & RECEIVER SCOPE BASE



Cantilever Or Receiver Mount Design Gives Stability & Accuracy

Two, highly functional designs for the Ruger 10/22. **Barrel Mount** - Attaches to the barrel; cantilevers rearward, over the top of the receiver. Scope stays aligned with the bore, diminishes the effect of tolerance stacking between the receiver and slip-in barrel. Installation requires drilling and tapping of barrel. **Receiver Mount** - For tightly fitted or threaded barrels. Raised design provides the proper height and eye relief for stocks equipped with Monte Carlo combs or raised cheekpieces. Same hole pattern as factory mount. **■**

**SPECS:** Aluminum, anodized, matte black (MB) or matte silver (MS) finish. Barrel Mount - 8" (20cm) long, 2 1/2" oz. (70g) wt. Receiver Mount - 4 1/4" (12cm) long, 2 oz. (56 g) wt. Accepts Weaver-style rings.

- #930-122-300AT MS 10/22 Barrel Mount, 3Z29F05 . . . . . \$ 32.99
- #930-122-302AT MB 10/22 Barrel Mount, 3Z38K77 . . . . . 44.99
- #930-000-035AT MB 10/22 Receiver Mount, 3Z26H80 . . . . . 29.99

### WEAVER REMINGTON 700 TACTICAL MULTI-SLOT SCOPE BASE

Increases Mounting Options For Hunting Or Tactical Rifles



One-piece, precision machined Weaver rail lets you mount scopes, red-dot sights, ghost-ring sights, and other optics using Weaver-style rings. Plenty of cross-slots allow optimal ring spacing for a wide range of scopes including compact, full-size, and extra-long scope tubes. Low-profile, open center design allows use of front sight when optics are removed. Lightweight aluminum reduces weight without compromising strength. Hardcoat anodized for additional strength and wear resistance. Attaches to factory drilled and tapped receivers using the included steel mounting screws. **■**

**SPECS:** Aluminum, anodized finish, matte black. Steel mounting screws. Short Action (SA) - 5 1/8" (14.9cm) long. Long Action (LA) - 6 1/4" (15.8cm) long. Fits Rem 700, 78, 40X-L, 721, and 725. Accepts Weaver-style rings.

- #955-000-137AT Rem. 700 SA Base, 5E20E29 . . . . . \$ 21.99
- #955-000-136AT Rem. 700 LA Base, 5E20A29 . . . . . 21.99

### XS SIGHT SYSTEMS LEVER ACTION LEVER SCOUT MOUNT™



Mounts Scope Over Barrel For Fast Sighting

Lightweight, Weaver-style mount positions an extended eye relief scope forward of the receiver for quick, both-eyes-open sighting. Weaver-style base features multiple cross slots for attaching a wide range of electronic and optical sights. Mounts to existing holes and rear sight dovetail. Sets low to allow use of iron sights without removing mount. Requires no modifications to rifle. **Marlin** models available for 1895 Guide Gun, 1894 and 336 rifles. **Winchester** fits Model 94's with rear sight dovetail 4" forward of receiver. **■**

**SPECS:** Aluminum, black, matte finish. 8" (20.3cm) long. Includes instructions, plastic punch, hex wrench and Loctite®. Winchester also includes bedding compound.

- #006-000-020AT Marlin 1895 Scout Mount, 6K54C07 . . . \$ 63.90
- #006-000-031AT Marlin 1894 Scout Mount, 6K54Q07 . . . 63.90
- #006-000-032AT Marlin 336 Scout Mount, 6K54G07 . . . 63.90
- #006-000-035AT Winchester 94 Scout Mount, 6K57A01 . . . . . 67.50

### XS SIGHT SYSTEMS MARLIN LEVER ACTION LEVER RAIL



Provides Flexible Mounting Of Optics & Sights

Lightweight scope rail mounts to Marlin centerfire lever gun without drilling and trapping. Accepts Weaver-style or Picatinny accessories, including the Marlin 1894, 1895 or Marlin 336/308MX Lever Rail Ghost Ring set (above). Extra-long rail gives plenty of versatility in mounting scope directly over the receiver or forward over the barrel for intermediate eye relief optics or red dot sights. Requires removal of factory rear sight. Gunsmith installation recommended. **■**

**SPECS:** Aluminum, black, matte finish. 11" (27cm) long, .830" (21mm) wide. 3 oz. (85g) wt. Includes mounting hardware.

- #006-000-170AT Marlin 1894 Lever Rail, 6K54A07 . . . . . \$ 63.90
- #006-000-151AT Marlin 1895 Guide Gun Lever Rail, 6K54G07 . . . . . 63.90
- #006-000-165AT Marlin 336/308MX Lever Rail, 6K54P07 . . . . . 63.90

### MARLIN 1894/1895/336/308MX LEVER RAIL SIGHT SYSTEM

Convenient kit combines the lightweight Lever Rail one-piece scope rail with backup iron sights for mounting on your Marlin lever rifle without drilling and trapping. Rear ghost ring is fully adjustable for windage and elevation, with interchangeable .191" and .230" diameter apertures for fine-tuning accuracy. One-piece front sight has .100" wide white-line post. **■**

**SPECS:** Lever Rail - Aluminum, black, matte finish. 11" (27cm) long, .830" (21mm) wide, 3 oz. (85g) weight. Includes mounting hardware. Sights - Steel, matte black finish. Front sight: .100" wide, .528" high measured from top of barrel to top of blade. 1895 fits Marlin 1895 with .700" (17.8mm) and 1" (2.5cm) c-to-c front ramp screws. 336 fits round barrel Model 336 only.

- #006-000-167AT Marlin 1894 Lever Rail Sight System, 6K148L17 . . . . . \$ 162.00
- #006-000-166AT Marlin 1895 Lever Rail Sight System, 6K148H17 . . . . . 162.00
- #006-000-168AT Marlin 336 Lever Rail Sight System, 6K148B17 . . . . . 162.00
- #006-000-169AT Marlin 308MX Lever Rail Sight System, 6K163L22 . . . . . 179.10

### BURRIS QUICK DETACH ZEE RINGS

Quickly Removable, Super Stable



Nothing is more frustrating than breaking a scope on the hunt with no way to remove it from the rifle. Weaver-style, 1" quick detach rings give you a rock solid mounting system for optics that can be removed from the base quickly and easily with QD levers. Instead of walking back to camp empty handed, you can simply remove the scope and use the iron sights. Immediate return to zero means that you won't spend precious daylight sighting back in if you've taken the scope off for dense woods hunting. Two, Torx head screws fasten rings securely to scope. Available in Low, Medium, and High. **■**

**SPECS:** Hardened steel. Matte black. Height from top of base to bottom of ring. Low .2" (5.1mm). Medium .32" (8.1mm). High .48" (12.2mm). Sold per set.

- #118-000-005AT Quick Detach Zee Ring, Low, 8A52H99 . . . . . \$ 52.99
- #118-000-006AT Quick Detach Zee Ring, Med, 8A52P99 . . . . . 52.99
- #118-000-007AT Quick Detach Zee Ring, High, 8A52B99 . . . . . 52.99



**YANKEE HILL MACHINE AR-15/M16/AR-308 SCOPE RISER**

Minimalist Design  
Raises Optics 1/2"



This streamlined mount raises any scope or red dot sight 1/2" for easier eye alignment without adding needless bulk or weight to the gun. Precision-machined, 5/2" base mounts quickly and easily to any Picatinny rail to provide a secure and stable base for your sighting equipment. **SPECS:** Aircraft grade aluminum, hardcoat anodized matte black. 5/4" length, 3/4" total height, 1 1/4" width. Raises equipment 1/2".

#100-010-687AT 227A Scope Riser, 9A28F21 ..... \$ 32.80



**BADGER ORDNANCE MAXIMIZED SCOPE RINGS**



Extra Strong To Withstand Heavy Recoil

Heavy duty 30mm steel rings, machined in pairs, serial numbered, and designed specifically to securely hold large, heavy scopes on hard-recoiling guns. Weaver-style clamp with big 1/2" nut really snugs ring to the mount. Ultra-High provides optimum height for AR-15, AR-10 and SR-25 rifles. **MAX-50** is 1" (2.5cm) wide with six clamping screws. Gives 60% more holding power to keep scopes on .50 BMG rifles. Ring reducers convert 30mm to 1". **SPECS:** Steel, black, matte finish. Ring height measured from top of mount to center of ring. **Standard** - .823" (2cm), **Medium** - .885" (22.5mm), **Medium High** - 1.0" (2.5cm), **High** - 1.125" (2.8cm), **Ultra High** - 1.378" (3.5cm), **Max-50** - .823" (2cm), **Max-50 High** - 1.125", **Max-50 Ultra-High** - 1 1/4" (3.7cm). **Weights:** Standard - 6.6 oz (187 g), High - 9 oz. (255 g), Ultra High - 10 oz. (284 g), Max-50 - 10.4 oz. (294 g).

- #093-306-080AT Std. .823" Scope Ring, 3K155P71... \$ 169.99
- #093-306-001AT Med. .885" Scope Ring, 3K155B71... 169.99
- #093-306-002AT Med. High 1" Scope Ring, 3K155B71... 169.99
- #093-306-090AT High 1.125" Scope Ring, 3K155M71... 169.99
- #093-306-100AT Ultra High 1.378" Scope Ring, 3K155L71... 169.99
- #093-306-110AT Max-50 Scope Rings, 3K164B29... 179.99
- #093-000-001AT Max-50 High Scope Rings, 3K164G29... 179.99
- #093-000-013AT Max-50 Ultra High Scope Rings, 3K168G57... 179.99
- #093-306-120AT 1" Std. Ring Reducers, 3K29E99... 29.99
- #093-000-002AT 1" Max-50 Ring Reducers, 3K43N99... 43.99

**B-SQUARE RUGER® MINI-14® SCOPE MOUNT**

Multi-Slotted For Perfect Ring Spacing

For Series 181 and newer with removable bolt stop covers. Attaches to side of receiver; replaces the bolt stop cover plate. Locks in place with two brass-tipped set-screws. Comes with 1" Weaver-style scope rings; Black model also available without rings. **SPECS:** Aluminum, anodized black or silver. Screws and recoil keys are steel.



- #122-450-014AT Mini-14 Mount, Black w/Rings, 6K69M82... \$ 72.99
- #122-450-114AT Mini-14 Mount, Silver w/Rings, 6K69I86... 79.99
- #122-445-020AT Mini-14 Mount, Black, w/o Rings, 6K47I77... 49.99

**BADGER ORDNANCE**

**34 & 35MM TACTICAL RINGS**

Easy Installation & Removal; Heavy Duty To Stand Up To Powerful Recoil



Precision-machined, tactical ring sets provide strong, rigid mounting to securely hold large-diameter scope tubes, like Schmidt & Bender, on hard-recoiling guns. Robust, hex clamping nuts and Weaver-style clamps lock rings tightly on MIL-STD 1913 Picatinny bases. Ring cap is secured with Torx screws. Each set is serial-numbered to guarantee a precision-matched pair. **SPECS:** 34mm available in 1" (25.4mm), 1.25" (2.9cm) and 1.275" (31.9cm) ring heights. 1" & 1.125" - Steel, matte black oxide finish. 1.275" - MAX-Alloy aluminum, black, matte, anodized finish. Ring heights measured from top of base to inside center of rings. 35mm - Machined aluminum, hardcoat anodized, matte black. Heights listed below.

- #093-000-028AT 34mm Rings, 1" High, 3K177L14... \$ 189.99
- #093-000-035AT 34mm Rings, 1.125" High, 3K177D14... 189.99
- #093-000-017AT 34mm Rings, 1.275" High, 3K190E99... 199.99
- #093-000-043AT 35mm Rings, 1.125" High, 3K177E14... 189.99
- #093-000-044AT 35mm Rings, 1.375" High, 3K177M14... 189.99

**B-SQUARE SPORT UTILITY RINGS**



Economical Rings For Mounting Scopes On Weaver-Style Bases

Strong, lightweight aluminum rings secure scope to any Weaver-style or similar dovetail base. Extra length maximizes contact surface between scope and rings for exceptional gripping force to prevent scope movement under recoil. For steel, hex-head screws secure the ring halves, while a cross-bolt locks the clamping block securely to the base. Hex wrench included. Models available for 1" and 30mm scope bodies. Sold in pairs. **SPECS:** Aluminum, anodized, matte black. Fits Weaver-style bases. Height measured from top of base to inside bottom of ring. 1" **Low** - .165" (4.2mm), 1" **Medium** - .335" (8.5mm), 1" **High** - .695" (17.7mm), 30mm **Low** - .175" (4.5mm), 30mm **Medium** - .330" (8.4mm), 30mm **High** - .585" (14.9mm).

- #100-003-586AT Low 1" Rings, 6K10B29... \$ 11.99
- #100-003-587AT Medium 1" Rings, 6K10N29... 11.99
- #100-003-588AT High 1" Rings, 6K9H39... 10.99
- #100-003-481AT Low 30mm Rings, 6K9D36... 10.99
- #100-003-553AT Medium 30mm Rings, 6K10E21... 11.99
- #100-003-482AT High 30mm Rings, 6K10G21... 11.99

**DAI MANAGEMENT ENFIELD NO. 4 & 5 SCOPE MOUNT**

Quick Detachable, Positive Return To Zero



No gunsmithing required to put a scope on that old Enfield No. 4 or 5. Quick detachable, Weaver-style base is machined to extremely close tolerances for precise return to zero. Attaches solidly to the receiver using the ejector and safety screws. Installation requires no bolt modification or rear sight removal. Leveling adjustments adapt mount to a wide range of receivers; windage adjustments help keep your scope reticle in the center of its range. Does not impair access to safety. **SPECS:** Aluminum, matte black. Savage-built rifles and others using a flat ejector spring require block-style spring. 3.9" (10cm) long.

- #100-000-319AT Enfield Scope Mount, 4K67H45... \$ 75.99

**BURRIS SIGNATURE RINGS**

POS-ALIGN Pivoting Synthetic Inserts End Scope Misalignment



Unique system puts an end to dinged, damaged, and misaligned scope tubes, plus holds scopes firmly against recoil. Steel outer rings with self-centering, synthetic inner rings, adjust to slight mounting variations so any 1" or 30mm scope is perfectly aligned. On bases without windage adjustment you get maximum usage of the scopes' internal windage/elevation adjustment, closer lens alignment, and clear, sharp images.

**SPECS:** Rings - Steel, 1" (2.5cm) and 30mm I.D. Available in polished blue (PB), matte blue (MB), or satin nickel (SIL) silver. Rings sold in pairs and include 1 pair concentric inner rings (inserts). Pos-Align Standard (STD) Rings fit Burris/Leupold/Millett rotary dovetail systems. Pos-Align Zee Rings (ZEE) fit Weaver-style bases. Height shown is from top of base to bottom of ring. 1" Standard Rings: Med - .270" (6.8mm); High - .390" (9.9mm). 1" Zee Rings: Med - .270" (6.9mm); High - .420" (10.7mm). 30mm Standard Rings - Med - .180" (4.6mm); High - .300" (7.6mm); Extra High - .420" (10.7mm). Inserts - Synthetic material, black. 30mm Zee Rings - Med - .200" (5.1mm); High - .325" (8.3mm); Extra High - .580" (14.7mm)

STOCK #	MODEL	FINISH	PRICE
#118-420-401AT	1" Med.	Matte	8A34K99 \$ 34.99
#118-420-578AT	30mm Med.	Matte	8A59Q99 \$ 59.99
#118-420-411AT	1" High	Matte	8A34L99 \$ 34.99
#118-420-581AT	30mm STD	MB	8A59M99 \$ 59.99
#118-420-582AT	30mm Ex High	Matte	8A59M99 \$ 59.99
#118-420-420AT	1" Medium	Black	8A39D99 \$ 39.99
#118-420-421AT	1" Med.	Matte	8A39H99 \$ 39.99
#118-420-422AT	1" Med.	Nickle	8A45A99 \$ 45.99
#118-420-430AT	1" High	Black	8A39E99 \$ 39.99
#118-420-431AT	1" High	Matte	8A39I99 \$ 39.99
#118-420-432AT	1" High	Nickle	8A45L99 \$ 45.99
#118-000-018AT	30mm Medium	Matte	8A61M99 \$ 61.99
#118-000-017AT	30mm High	Matte	8A61H99 \$ 61.99
#118-000-004AT	30mm Extra High	Matte	8A61P99 \$ 61.99

**SIGNATURE OFFSET RING INSERTS** - Pos-Align®, synthetic inserts optically center the internal lenses of your scope for optimal brightness and clarity. Offset design helps correct for slightly misaligned rings caused by off-center receiver holes, bases, or rings. Relieves stress on the scope tube and allows maximum usage of your scope's internal windage/elevation adjustments. Delivers excellent scope-to-ring contact without lapping; plus, prevents dings and marks on the scope tube. Available in pairs or kits. **Basic Kit** includes one pair each of +/- .005", +/- .010" and +/- .020" inserts; **Gunsmith Kit** includes 10 pairs of each. **SPECS:** Synthetic, black. For 1" rings only.



- #118-626-019AT Pos-Align Offset Insert Kit for 1" Rings, 8A00LWN... \$ 16.49
- #118-626-024AT G'smith Offset Insert Kit, 8A84D99... 84.99
- #118-626-017AT +/- .010" Offset Inserts, 1 pair, 8A00QXD... 9.99
- #118-626-018AT +/- .020" Offset Inserts, 1 pair, 8A00GLK... 9.99

**EGW PRACTICAL ALUMINUM RINGS**



Low Profile & High Strength

Vertically split, low-profile rings clamp to MIL-STD 1913 Picatinny rails or Weaver-style bases and provide an eye-pleasing, streamlined look without compromising strength. Ring halves clamp together with four, steel Allen head screws for a tight hold on optic and rail. Steel cross-bar

locks in the rail slot or base to prevent slippage under recoil. Available for 1" and 30mm diameter scope tubes. **SPECS:** Aluminum, hardcoat anodized, matte black. Steel crossbar. Sold in pairs. Height measured from top of base to center of ring. 1" - .750" high. 30mm - .840" high.

**BROWNELLS PICATINNY SCOPE RINGS**

Robust, Versatile, Affordable Rings For Tactical & Sporting Rifles



These rings are precision machined to true MIL-STD 1913 specs to fit Picatinny-type bases such as Brownells Modular Flattop Riser Mount and Picatinny Scope Bases. No special wrenches needed for installation. Underside of ring is undercut with a rounded radius that offers extra clearance for finger tightening the nut and for final tightening with a standard socket or flat-blade screwdriver. Extra-strong U.S.-size hex nuts have a deep slot that provides maximum engagement of screwdriver blade to help prevent slippage and slot damage—you can even use a U.S. quarter in a pinch. Crossbolt has a square shank that serves as a recoil lug to solidly engage scope base when properly installed to ensure rings won't shift forward under recoil. Four, strong 6-40 x 1/4" T-15 Torx® head screws securely anchor the ring halves, and large contact area with scope helps prevent slippage even on heavy-recoiling, magnum rifles. Available in 4140 billet steel for superb strength and stability, or aluminum models machined from 6061 T6 billet for reduced weight. Matte black finish blends with most factory rifle and scope finishes. Replacement nut, crossbolt, and aluminum or steel side locking bars available separately. **SPECS:** Rings sold in pairs. Models available to fit 1" and 30mm scope bodies. **Steel** - 4140 billet steel, black, matte, oxide finish. **Aluminum** - 6061 T6 aluminum billet, hardcoat anodized black, matte. Heights measured from top of base to center of ring: **Low** - .825" (2.1cm); **Med.** - 1" (2.5cm); **High** - 1.125" (2.9cm); **Extra-High** - 1.375" (3.5cm).

- #080-000-436AT Low 1" Picatinny Rings, Steel, 8K75B15... \$ 89.99
- #080-000-437AT Med 1" Picatinny Rings, Steel, 8K75N10... 89.99
- #080-000-438AT High 1" Picatinny Rings, Steel, 9A75E14... 89.99
- #080-000-433AT Low 1" Picatinny Rings, Aluminum, 9A62L31... 69.99
- #080-000-434AT Med 1" Picatinny Rings, Aluminum, 8K62G29... 69.99
- #080-000-435AT High 1" Picatinny Rings, Aluminum, 8K62C29... 69.99
- #080-000-811AT Med. 30mm Picatinny Rings, Steel, 8K88C24... 99.99
- #080-000-740AT High 30mm Picatinny Rings, Steel, 8K88G24... 99.99
- #080-000-741AT Ex-High 30mm Picatinny Rings, Steel, 8K87A45... 99.99
- #080-000-810AT Med. 30mm Picatinny Rings, Alum., 8K83N84... 99.99
- #080-000-738AT High 30mm Picatinny Rings, Alum., 8K83Q84... 99.99
- #080-000-739AT Ex-High 30mm Picatinny Rings, Alum., 8K83L84... 99.99
- #080-000-708AT Replacement Hex Nut, 8K6I24... 7.99
- #080-000-709AT Replacement Crossbolt, 8K4B89... 5.99
- #080-000-706AT Replacement Locking Bar, Steel, 8K5D79... 6.99
- #080-000-707AT Replacement Locking Bar, Alum., 8K4E93... 5.99

locks in the rail slot or base to prevent slippage under recoil. Available for 1" and 30mm diameter scope tubes. **SPECS:** Aluminum, hardcoat anodized, matte black. Steel crossbar. Sold in pairs. Height measured from top of base to center of ring. 1" - .750" high. 30mm - .840" high.

- #296-000-161AT 1" Practical Rings, 6B55J11... \$ 59.99
- #296-000-160AT 30mm Practical Rings, 6B55Q11... 59.99
- Advise # — Two-Piece Base Set, 4K30M20... \$ 37.49

**BURRIS DELUXE .22 TIP-OFF RINGS**



All Steel For Full Size Rime & Airgun Scopes

Gracefully contoured, precision-machined, premium steel rings mount 1" scopes on airguns or .22 caliber rimfires with grooved receivers. Blued finish. Fits nominal 3/8" dovetail.

**DELUXE RINGS** - Graceful style and superior strength. Highly polished blued finish.

**SPECS:** Height measured from top of base to bottom of scope tube. Medium - .310" (7.9mm) high. High - .455" (11.6mm) high.

**#118-420-072AT Med. .22 Rings, 8A34A99 . . . . . \$ 34.99**

**#118-420-073AT High .22 Rings, 8A34H99 . . . . . 34.99**

**SIGNATURE POS-ALIGN RIMFIRE/AIRGUN RINGS** - 1" rings with self-aligning, synthetic inserts that prevent scope damage from misaligned rings.

**SPECS:** Steel, matte blued finish. High .793" (20.1mm). Fits both nominal 3/8", .22 and 11mm airgun dovetails.

**#118-420-556AT MB RF/Airgun Rings, 8A54K99 . . . . . \$ 54.99**

**BURRIS WEAVER-STYLE "ZEE" RINGS**

Made Of Steel

Precision machined STEEL, streamlined rings to fit Weaver style bases. Gives that "custom" look. Elegant, rounded contours.

**SPECS:** Steel, polished blued (Pol. Blue), matte blued (Safari) or satin, nickel-plated (Silver), 3 oz. (85g) pair.

Height shown is from top of base to inside bottom of ring. 1" (2.5cm) dia.: Low - .135" (3.4mm), Med. - .245" (6.2mm), High - .450" (11.4mm), 30mm (1.1") dia.: High - .460" (11.6mm).



STOCK #	HEIGHT	SIZE	FINISH	PRICE
<b>#118-420-079AT</b>	Low	1"	Silver	8A31E99 <b>\$ 31.99</b>
<b>#118-420-080AT</b>	.135"	1"	Black	8A27J99 <b>\$ 27.99</b>
<b>#118-420-083AT</b>	Low	1"	Safari	8A27D99 <b>\$ 27.99</b>
<b>#118-420-085AT</b>	Med.	1"	Silver	8A31M99 <b>\$ 31.99</b>
<b>#118-420-081AT</b>	Med.	1"	Pol. Blue	8A27N99 <b>\$ 27.99</b>
<b>#118-420-084AT</b>	Med.	1"	Safari	8A27Q99 <b>\$ 27.99</b>
<b>#118-420-082AT</b>	High	1"	Pol. Blue	8A27D99 <b>\$ 27.99</b>
<b>#118-420-077AT</b>	High	30mm	Matte	8A46Q99 <b>\$ 46.99</b>

**BROWNELLS RIMFIRE/AIRGUN DOVETAIL SCOPE MOUNT**



Integral Offset Rings For Rock-Solid Mounting

One-piece mount with integral rings is precision machined for rock-solid mounting on receivers with nominal 3/8" dovetails.

Clamps tight with two, high-strength steel crossbolts for zero movement. Ring height and forward offset are ideal for use with long-body scopes. Two steel Allen head screws secure each top ring strap to the lower ring and hold the scope in stress-free alignment for consistent accuracy. Machined from 6061 aluminum billet, then deep hardcoat anodized for added strength and wear resistance. Accepts 1" diameter scope tubes.

**SPECS:** 6061 T6 aluminum, hardcoat anodized, matte black. 4" (10.2cm) long, 1" (2.5cm) I.D. Ring height - .45" (11.4mm) measured from top of dovetail to inside bottom of ring. Fits 3/8" (9.5mm) grooved receivers. Accepts scope with 1" O.D. tube.

**#080-000-673AT Dovetail Scope Mount, 8K57B25 . . . . . \$ 59.99**

**EGW TACTICAL SCOPE RINGS**

Machined As A Matched, Serial-Numbered Pair For Precise Alignment



Heavy duty Picatinny rings are precision machined from solid aluminum billet as matched pairs to aid in obtaining the best possible alignment.

Each pair is clamped together and the center holes bored to 30mm to tolerances of +/- .0014", then engraved with matching serial number. In addition, the lower halves are marked to prevent separation from their matched ring caps. All edges are beveled or radiused, including both sides of the steel ring nut, to minimize potential for snagging on other gear. Surfaces are blasted to ensure an even, matte finish, then hard anodized with a durable black finish for added strength and wear resistance. Crossbolt and nut are machined from chrome-moly steel, heat treated for exceptional strength, and blued. Steel, Torx® screws, four per ring, have matching finish. Separately available, precision-machined polymer inserts allow use of these rings with 1" diameter scope tubes.

**SPECS:** Rings - Body: Aluminum, hardcoat anodized, matte black. Crossbolts/Nuts/Cap Screws - Chrome-moly steel, blued. Height from top of base to inside bottom of ring: .400" (10.1mm). Fits scopes with 30mm O.D. tubes. Mounts to MIL-STD 1913 Picatinny bases. Inserts - Machined polymer, black.

**#296-000-109AT 30mm Tactical Scope Rings, 1 Pair, 6B108J69 . . . . . \$ 124.99**

**#296-000-110AT Inserts For 1" Scopes, 1 Pair, 6B14E17 . . . . . 14.99**

**REDFIELD**

**STEEL RUGER® RINGS**

Smooth Contours For Great Looks



Windage adjustable rings to fit directly onto Ruger integral bases.

**SPECS:** Available in Polished Blue (PB) or Matte Blue (MB).

STOCK #	SIZE/FIN./HGHT.	FITS
<b>#750-522-810AT</b>	1", PB, high	M77 - 2.2" to 2.5" dia. objective
<b>#750-522-809AT</b>	1", MB, high	M77 - 2.2" to 2.5" dia. objective
<b>#750-522-820AT</b>	30mm, MB, high	M77 - up to 56mm objective
- Advise # -	1" PB Ruger Rings, 5E45P22 . . . . .	<b>\$ 48.99</b>
- Advise # -	1" MB Ruger Rings, 5E49H76 . . . . .	<b>53.99</b>
- Advise # -	30mm MB Ruger Rings, 5E58I84 . . . . .	<b>63.99</b>

**LEUPOLD**

**TWO-PIECE RIFLE BASE SETS**



Two-piece base sets, CNC machined to exacting tolerances, provide rock solid scope mounting. Reversible and long rear bases make it easy to use standard rings to mount scopes, from

extra long varmint and target models to small compacts on any length action. Front bases accept Leupold's (and Burris/Redfield/Millett) rotary dovetail ring. The rear base uses standard Leupold/Burris/Redfield windage, screw-secured ring.

**SPECS:** 12L14 Cold Rolled Steel. Polished blue (Gloss), Matte blue (Matte), or Satin nickel (Silver) finish. Includes 2 bases with TORX screws. (RF) Reversible front base. (RR) Reversible rear base.

RIFLE MODEL	STK# GLOSS	STK# MATTE	STK# SILVER
Austin & Halleck	<b>#526-500-320AT</b>	NA	NA
Browning FN action	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
FN action RF	<b>#526-370-080AT</b>	NA	NA
A-Bolt long rear base	<b>#526-417-770AT</b>	<b>#526-462-970AT</b>	<b>#526-451-570AT</b>
A-Bolt Std. rear base	<b>#526-492-250AT</b>	NA	NA
A-Bolt WSSM	NA	<b>#526-000-076AT</b>	NA
X-Bolt	<b>#526-000-103AT</b>	<b>#526-000-102AT</b>	<b>#526-000-104AT</b>
BLR Lightning	<b>#526-502-370AT</b>	<b>#526-502-380AT</b>	NA
BR 1885 Hi-Wall (Will not fit BPCR, Traditional)	<b>#526-492-220AT</b>	NA	NA
BSA Monarch	<b>#526-370-030AT</b>	<b>#526-476-640AT</b>	NA
BR 1885 Low-Wall (Will not fit BPCR, Traditional)	<b>#526-512-600AT</b>	NA	NA
Monarch RF	<b>#526-370-040AT</b>	NA	<b>#526-463-010AT</b>
AB3 RVF	NA	<b>#526-000-303AT</b>	NA
Harrington & Richardson 300, 301, 330, 370 (FN Mauser)	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
H&H (FN Mauser) RF	<b>#526-370-080AT</b>	NA	NA
JC Higgins Model 51	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
Model 51 RF	<b>#526-370-080AT</b>	NA	NA
Kimber 84	NA	<b>#526-000-108AT</b>	NA
8400	NA	<b>#526-000-109AT</b>	NA
Knight Disk, Wolverine	<b>#526-000-029AT</b>	NA	NA
Marlin 455	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
455 RF	<b>#526-370-080AT</b>	NA	NA
Model 7	<b>#526-370-050AT</b>	<b>#526-462-800AT</b>	NA
Model 7 RF/RR	<b>#526-370-060AT</b>	NA	NA
Mauser FN, Mark X, Parker Hale	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
Mauser RF	<b>#526-370-080AT</b>	NA	NA
Swedish M-96	NA	<b>#526-512-630AT</b>	NA
Mauser '98	NA	<b>#526-000-075AT</b>	NA
Remington Model 7	<b>#526-512-560AT</b>	NA	NA
700, 721, 725, 40-X, 700BP	<b>#526-370-030AT</b>	<b>#526-476-640AT</b>	NA
700 RF	<b>#526-370-040AT</b>	<b>#526-000-030AT</b>	<b>#526-463-010AT</b>
710	NA	<b>#526-541-000AT</b>	NA
541	<b>#526-000-029AT</b>	NA	NA
Ruger M-77 round action	<b>#526-370-030AT</b>	<b>#526-476-640AT</b>	NA
Model 77 RF	<b>#526-370-040AT</b>	NA	<b>#526-463-010AT</b>
Sako round action	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA
Sako RF	<b>#526-370-080AT</b>	NA	NA
Savage 110/1110, 16/116 w/Accu-Trigger; also fits Edge	<b>#526-000-072AT</b>	<b>#526-000-073AT</b>	<b>#526-000-074AT</b>
S&W 1500	<b>#526-370-030AT</b>	<b>#526-476-640AT</b>	NA
1500 RF	<b>#526-370-040AT</b>	NA	<b>#526-463-010AT</b>
Tikka Whitetail Hunter	<b>#526-000-056AT</b>	NA	NA
Weatherby FN action	<b>#526-370-070AT</b>	<b>#526-462-900AT</b>	NA

**KELBLY "PANDA" SCOPE RINGS**

Exact Dimensions & Variety Of Height Options For Benchrest Shooters



Standard 30mm Double Screw Rings



1" Short Double Screw Rings Standard 1" Single Screw Rings

Kelbly rings the number one choice of many benchrest shooters. High-quality rings are machined from solid bars of aluminum as matched sets to exacting tolerances. Designed to mount on Stolle Dovetails or Davidson bases. Available in single screw or double screw models. Bead blasted or matte black anodized finish. All rings are sold as pairs. Short rings are designed for mounting scopes on varmint rifles or hunting rifles using Davidson bases. Gets the scope closer to the centerline of the

barrel. Short height is available in 1" Double Screw only. Standard rings are used on Stolle actions. This height also works well with large objective scopes such as Nightforce and Burris on varmint and hunting rifles. Standard height is available in 1" and 30mm, double or single screw, black or bead blasted finish. Tall rings provide target shooters with several benefits: recoil effect is more consistent because cheek contact with the stock is all but eliminated, they your body in a better position more directly behind the rifle to cut down on gun handling errors, and they your head position to be more upright which is a more relaxed position and much better for watching wind flags. Tall Kelbly rings are available in 30mm, bead blasted finish only in single screw or double screw sets. Tall rings are also available as a combo set with a double screw front ring and single screw rear ring for the Leupold Competition scopes.

STOCK #	HEIGHT	DESCRIPTION	PRICE
<b>#749-007-516AT</b>	.8835"	1" Short Double Screw	8E00HCJ <b>\$ 85.99</b>
<b>#749-007-659AT</b>	.8835"	1" Short Double Screw, Blk	8E00HED <b>\$ 99.99</b>
<b>#749-007-278AT</b>	1.0835"	1" Single Screw	8E00QIS <b>\$ 75.99</b>
<b>#749-007-520AT</b>	1.0835"	1" Single Screw, Black	8E00BMJ <b>\$ 99.99</b>
<b>#749-007-524AT</b>	1.0835"	1" Double Screw	8E00AKR <b>\$ 85.99</b>
<b>#749-007-660AT</b>	1.0835"	1" Double Screw, Black	8E00GAP <b>\$ 99.99</b>
<b>#749-007-523AT</b>	1.1344"	30mm Single Screw	8E00FZF <b>\$ 85.99</b>
<b>#749-007-658AT</b>	1.1344"	30mm Single Screw, Blk	8E00ETE <b>\$ 99.99</b>
<b>#749-007-639AT</b>	1.1344"	30mm Double Screw	8E00DYB <b>\$ 117.99</b>
<b>#749-007-827AT</b>	1.1344"	30mm Double Screw, Blk	8E00QXD <b>\$ 130.99</b>
<b>#749-007-816AT</b>	1.6344"	30mm Tall Single Screw	8E00HUH <b>\$ 112.99</b>
<b>#749-007-874AT</b>	1.6344"	30mm Tall Double Screw	8E00MBC <b>\$ 139.99</b>

Kelbly ring heights are measured from the top of the base to the center of the ring.

RIFLE MODEL	STK# GLOSS	STK# MATTE	STK# SILVER
FN action RF	<b>#526-370-080AT</b>	NA	NA
Vanguard	<b>#526-370-030AT</b>	<b>#526-476-640AT</b>	NA
Vanguard RF	<b>#526-370-040AT</b>	NA	<b>#526-463-010AT</b>
Mk V	<b>#526-517-000AT</b>	<b>#526-517-010AT</b>	NA
Mk V RF	NA	<b>#526-517-030AT</b>	NA
Winchester 70 RR	<b>#526-370-050AT</b>	<b>#526-462-800AT</b>	NA
Win. 70 RF / RR Post '64 Model 70, 70A, 670, 770 and Pre-'64 Model 70 Serial# above 66, 360-except 70 Express, H&H magnum actions	<b>#526-370-060AT</b>	<b>#526-000-031AT</b>	NA
70 Express H&H magnum action	NA	<b>#526-503-780AT</b>	NA
.330" hole space RF			
94 Angle Eject	<b>#526-000-032AT</b>	NA	NA
Ruger American™ Round Rcvr	NA	<b>#526-000-302AT</b>	NA

### LEUPOLD ONE-PIECE BASE

Carefully machined from cold-rolled, steel bar stock, featuring generous windage adjustments for rear ring and precision fitted rotary dovetail for front ring. **Note: "STD" Mount Bases accept Burris, Millett and Redfield rotary dovetail rings.**



**SPECS:** 12L14 cold rolled steel. Polished Blue (PB), Matte blue (MB), Satin nickel (SIL) finish. Long Range (LR) gives additional elevation. All include TORX mounting screws.

RIFLE MODEL	ACTION FINISH	STOCK #
<b>BROWNING</b>		
FN action	Long PB	#526-261-620AT
A-Bolt	Short MB	#526-000-034AT
	Long MB	#526-000-035AT
BAR semi auto	PB	#526-261-630AT
BLR lever action pre-'96	PB	#526-261-640AT
<b>BSA</b>		
Monarch right hand	Short PB	#526-261-670AT
	Long PB	#526-261-660AT
<b>HARRINGTON &amp; RICHARDSON</b>		
	Long PB	#526-261-620AT
<b>HOWA</b>		
1500	Long PB	#526-261-660AT
<b>HUSQVARNA</b>		
Crown Grade & Carl Gustaf	PB	#526-261-720AT
<b>JC HIGGINS</b>		
Model 51	PB	#526-261-720AT
Model 53	Long PB	#526-261-620AT
<b>MARLIN</b>		
36 / 336	PB	#526-261-650AT
Model 455	Long PB	#526-261-620AT
Model 7	Long PB	#526-261-700AT
<b>MAUSER</b>		
FN & Mk X, Parker Hale	PB	#526-261-620AT
Unaltered Large Ring 98	PB	#526-261-730AT
<b>MOSSBERG</b>		
1500 / 1700	Long PB	#526-261-660AT
Model 1500 / 1700	Short PB	#526-261-670AT
<b>REMINGTON</b>		
Model 4, 6, 7400, 7600	PB	#526-349-200AT
	MB	#526-000-001AT
700, 721, 725, 40-X right hand	Long PB	#526-261-660AT
	Long MB	#526-000-036AT
700 left hand	Long PB	#526-263-160AT
700 matte LR long range	Long MB	#526-517-320AT
700 silver LR long range	Long SIL	#526-517-330AT
7, 700, 721, 725, 40-X right hand	Short PB	#526-261-670AT
700 matte	Short MB	#526-500-060AT
700 silver	Short SIL	#526-501-610AT
700 matte LR long range	Short MB	#526-517-340AT
600, 660, XP-100 single shot	Short PB	#526-261-670AT
740, 742, 760	PB	#526-261-680AT
<b>RUGER</b>		
10/22	PB	#526-322-620AT
	MB	#526-517-230AT
	SIL	#526-517-240AT
M-77 round action	Long PB	#526-261-660AT
<b>SAKO</b>		
Round action	PB	#526-261-620AT
<b>SAVAGE</b>		
110 thru 116 right hand	Long PB	#526-290-980AT
10 thru 16, Striker right hand	Short PB	#526-523-160AT
110 thru 116 left hand	Long PB	#526-502-190AT
110 thru 116, right hand w/AccuTrigger	Long PB	#526-000-065AT

### LEUPOLD QRW RING & BASE SYSTEM

All-Steel, Weaver-Style Components With Quick Release Levers; Start Fresh Or Retrofit To Existing Bases



The strength of cross-slot mounting combined with Leupold quality, plus the added convenience of quick release levers. With the rings split at an angle, below the centerline, it's easy to tighten the TORX head screws evenly without causing the scope to "roll" in the rings. Spring-loaded, adjustable levers can be moved so both rest at the same angle after tightening.

**SPECS:** Steel, powder-coated finish. Available in Gloss Black (GB), Matte Black (MB) and Silver (SIL). Rings and bases sold in pairs. Ring heights measured from top of base to center of ring: 1" Low - .750" (19.1mm); 1" Medium - .880" (22.4mm); 1" High - 1.000" (25.4mm); 30mm Low - .840" (21.3mm); 30mm Medium - .970" (24.6mm); 30mm High - 1.090" (27.7mm).

STK# 1"	STK# 30MM	HEIGHT	FINISH
#526-498-001AT	NA	Low	Gloss Black
#526-498-530AT	#526-498-610AT	Low	Matte Black
#526-498-540AT	NA	Low	Silver
#526-498-550AT	NA	Med.	Gloss Black
#526-498-560AT	#526-498-630AT	Med.	Matte Black
#526-498-670AT	NA	Med.	Silver
#526-498-580AT	#526-498-650AT	High	Matte Black

— Advise # — 1" QRW Rings, 4K60D65 ..... \$ 69.99  
 — Advise # — 30mm QRW Rings, 4K70C86 ..... 77.99

STOCK #	FITS	FINISH
#749-004-796AT	Rem 700/40X	Gloss Black
#526-498-410AT	Rem 700/721/722/725, 40X, SA & LA, RH & LH	Matte Black
#749-004-718AT	Rem 700/40X	Silver
#749-004-794AT	Savage 110-116	Gloss Black
#526-498-380AT	Win 70, SA & LA (does not fit Express model)	Matte Black
#526-498-360AT	Win 70 Express, Pre-'64 w/.435" rear hole	Matte Black
#526-498-350AT	Win 70 Express, Post-'64 w/.330" rear hole	Matte Black

— Advise # — QRW Bases, 4K31A54 ..... \$ 34.99

RIFLE MODEL	ACTION FINISH	STOCK #
10 thru 16, right hand w/AccuTrigger	Short PB	#526-000-068AT
	Short MB	#526-000-069AT
	Short SIL	#526-000-070AT
	PB	#526-261-690AT
<b>S&amp;W</b>		
1500 early model	PB	#526-261-720AT
1500 right hand	Long PB	#526-261-660AT
<b>SPRINGFIELD</b>		
'03-A3	PB	#526-261-750AT
<b>THOMPSON CENTER</b>		
.22 Classic	PB	#526-000-063AT
<b>WEATHERBY</b>		
FN action	PB	#526-261-620AT
Vanguard right hand	Long PB	#526-261-660AT
<b>WESTERN FIELD</b>		
Model 740	PB	#526-261-650AT
<b>WINCHESTER</b>		
Model 70	Long PB	#526-261-700AT
	Long MB	#526-000-037AT
Model 70 LR long range	Long MB	#526-517-360AT
Post '64 Mod. 70, 70A, 670, 770, and Pre '64 Win. Mod 70, Ser. # higher than 66,350	Short MB	#526-517-380AT

— Advise # — One-Piece Base, 4K22D36 ..... \$ 26.99  
 — Advise # — Long Range Base, 4K22E36 ..... 26.99

### LEUPOLD

### QUICK-RELEASE™ MOUNT SYSTEM

Remove Scope In Seconds; Positive Return To Zero



Remove the scope with just a twist of the levers and reinstall it in only seconds with no loss of zero. Double-lever, dual locking cam system withstands the recoil from any rifle cartridge without shooting loose or accidentally unlocking.

**SPECS:** Steel. Polished blue (PB) or matte blue (MB) finish. 1-piece bases fit right-hand actions only. 2-piece bases sold per pair to fit RH, and LH actions. Rings, sold in pairs, 1" (2.5cm) or 30mm (1.18") dia. Ring heights measured from top of base to center of ring. Low: .650" (16.5mm), Medium: .770" (19.5mm), High .900" (22.8mm), Super High: 1.0" (2.5cm). Extension Rings include one standard ring and one that is extended 3/8" to allow mounting a wide variety of scopes.

STK# PB	STK# MB	FITS
#526-471-840AT	#526-471-850AT	BSA Monarch, Rem. 40X, 700,721, 722, 725, S&W 1500, Weatherby Mk V, Vanguard
#526-500-550AT	#526-500-560AT	Mark X (Mauser)
#526-500-650AT	NA	Gunmaker's Bases, bottom not contoured
NA	#526-471-890AT	Win. 70
NA	#526-500-620AT	Win. 70 Express, Pre '64 w/.435" rear hole spacing
NA	#526-500-630AT	Win. 70 Express, Post '64 w/.330" rear hole spacing

— Advise # — Q-R 2-Pc Bases, PB or MB, 4K53E36 ..... \$ 59.99

STK# MB	FITS
#526-000-055AT	Marlin 336/1895
#526-512-470AT	Rem. 7, 700
#526-000-005AT	Thompson Center Encore

— Advise # — Q-R 1-Piece Base, 4K53K89 ..... \$ 61.99

STOCK #	DIA./HEIGHT
#526-471-796AT	1"/Low
#526-471-810AT	1"/Medium
#526-499-760AT	1"/Medium Extended
#526-471-816AT	1"/High
#526-517-150AT	1"/Super High
#526-499-310AT	30mm/Medium
#526-499-330AT	30mm/High
#526-517-160AT	30mm/Super High

— Advise # — 1" Q-R Rings, 4K27L83 ..... \$ 34.49  
 — Advise # — 30mm Q-R Rings, 4K38L06 ..... 40.99  
 #526-499-760AT 1" Med. Q-R Ext Rings, 4K33B55 ..... \$ 36.99

### LEUPOLD RIMFIRE RINGS

No-Drill, No-Tap Design For 3/8" & 13mm Dovetails



All-steel rings mount 1" scopes on rimfire rifles and handguns with integral 3/8" or 13mm receiver dovetails. Torx® screw mounting system guarantees these rings stay put!

**SPECS:** Steel, high-polish blue. Torx head wrench included. Height measured from top of base to center of ring.

STOCK #	FITS DOVETAIL	HEIGHT
#526-000-049AT	3/8"	Med. - .875" (22.2mm)
#526-000-050AT	1/2"	High - 1" (25.4mm)

— Advise # — 1" Rimfire Scope Rings, 4K44N19 ..... \$ 49.49

### LEUPOLD "STD" RINGS



Classic all-steel rings grip the scope tightly. Fits Leupold STD, one- and two-piece bases, plus bases from Burris, Millett and Redfield. Models for 1" and 30mm O.D. scope tubes. **Extension Ring Sets** contain one standard ring, and one front extension ring that offsets ring spacing .650" (16.5mm).

**SPECS:** Gloss - polished blue. Matte - matte blue. Silver - satin nickel. Height measurements listed in the table below are from top of base to center of ring.

STOCK #	HEIGHT	SIZE	FINISH	STYLE
#526-261-590AT	Low .650"	1"	Gloss	Standard
#526-261-600AT	Medium .770"	1"	Gloss	Standard
#526-261-610AT	High .900"	1"	Gloss	Standard
#526-463-970AT	Super High 1.000"	1"	Gloss	Standard
#526-408-270AT	Super Low .550"	1"	Matte	Standard
#526-404-790AT	Low .650"	1"	Matte	Standard
#526-404-800AT	Medium .770"	1"	Matte	Standard
#526-461-340AT	High .900"	1"	Matte	Standard
#526-463-980AT	Super High 1.000"	1"	Matte	Standard
#526-452-690AT	Low .650"	1"	Silver	Standard
#526-453-380AT	Medium .770"	1"	Silver	Standard
#526-470-680AT	High .900"	1"	Silver	Standard
#526-499-080AT	Low .650"	1"	Gloss	Extension
#526-499-100AT	Low .650"	1"	Matte	Extension
#526-294-250AT	Medium .770"	1"	Gloss	Extension
#526-499-110AT	Medium .770"	1"	Matte	Extension
#526-478-820AT	High .900"	1"	Gloss	Extension
#526-478-830AT	High .900"	1"	Matte	Extension
#526-517-180AT	Low .650"	30mm	Matte	Standard
#526-499-600AT	Medium .770"	30mm	Gloss	Standard
#526-455-840AT	Medium .770"	30mm	Matte	Standard
#526-510-340AT	Medium .770"	30mm	Matte	Standard
#526-524-940AT	Medium .770"	30mm	Silver	Standard
#526-470-050AT	High .900"	30mm	Gloss	Standard
#526-499-590AT	High .900"	30mm	Matte	Standard
#526-510-350AT	High .900"	30mm	Matte	Extension
#526-524-950AT	High .900"	30mm	Silver	Standard
#526-524-001AT	Super High 1.000"	30mm	Matte	Standard
#526-524-960AT	Super High 1.000"	30mm	Silver	Standard

— Advise # — 1" Gloss & Matte Rings, 4K23B72 ..... \$ 27.99  
 — Advise # — 1" Silver Rings, 4K29Q99 ..... 33.99  
 — Advise # — 1" Extension Rings, 4K30F96 ..... 35.99  
 — Advise # — 30mm Rings, 4K36N43 ..... 45.49  
 — Advise # — 30mm Extension Rings, 4K49J37 ..... 56.99



### LEUPOLD PRW RINGS

Weaver-Style, All-Steel, For Rock-Solid Mounting

Machined from steel barstock with the strength and accuracy necessary to hold large objective scopes securely against recoil. Solid steel clamp uses two TORX screws to firmly lock rings to base while the square steel recoil lug holds tightly against movement. Split below the centerline, each ring features four screws that let you tighten the cap without rotating the scope.

**SPECS:** Steel, powder-coat finish. Available in Gloss Black, and Matte Black. Rings sold in pairs. Height measured from base to center of ring. Low - .730" (18.5mm); Medium - .850" (21.5mm); High - .980" (24.8mm).

STOCK #	SIZE	HEIGHT	FINISH	PRICE
#526-541-440AT	1"	Low (.730")	Matte Black	4K46L92 \$ 51.99
#526-541-470AT	1"	Med (.850")	Gloss Black	4K46J92 \$ 51.99
#526-541-490AT	1"	Med (.850")	Matte Black	4K46N92 \$ 51.99
#526-541-500AT	1"	High (.980")	Matte Black	4K47B88 \$ 51.99
#526-541-670AT	30mm	Med (.850")	Matte Black	4K53D66 \$ 59.99
#526-541-770AT	30mm	High (.980")	Matte Black	4K54A75 \$ 59.99

## LEUPOLD DUAL DOVETAIL SCOPE MOUNTS & RINGS



**Absolutely The Strongest Ring & Base System Available**

Leupold's famous rotary dovetail rings in BOTH front AND rear bases; there's no way a ring can shoot off its base. Ideal for large caliber, heavy kicking rifles that can throw a scope off easily, plus light caliber varmint rifles that need an absolutely rigid scope mount to make full use of the gun's accuracy potential. Dual Dovetail Bases and Rings must be used together; will not interchange with other Leupold rings and bases. Rings and bases sold separately; select the correct base set for your rifle, then choose rings.

**DUAL DOVETAIL RIFLE BASE SETS** - Those marked "Rev. Frt." have reversible front base to help get correct ring spacing  
**SPECS:** Steel, Finish: Standard Std. and PB, polished, blue; Matte, matte, blue; Silver, matte.

STOCK #	MODEL/FINISH	FITS
#526-405-080AT	700 PB	Rem. 700 Short & Long
#526-463-100AT	700 Matte	721/722/725/40X; Ruger 77
#526-000-088AT	700 Silver	(round receiver only);
#526-463-140AT	700 Rev. Frt/Matte	BSA Monarch; S&W 1500
#526-405-050AT	70 PB	Win. 70 Short & Long
#526-463-170AT	70 Matte	Win 70 Short & Long
#526-000-057AT	70 Rev. Frt/Matte	Win 70 Short & Long
#526-000-058AT	70 Rev. Frt/Matte	Win 70 Express w/.330" rear hole spacing
#526-501-590AT	A-Bolt Rev. Frt/Matte	Browning A-Bolt
#526-000-105AT	X-Bolt/Matte	Browning X-Bolt
#526-000-106AT	X-Bolt/PB	Browning X-Bolt
#526-517-050AT	Mark V Std.	Wthby Mark V
#526-517-060AT	Mark V Matte	Wthby Mark V
#526-517-070AT	Mark V Rev. Frt/Matte	Wthby Mark V
#526-000-059AT	Encore/Matte/One-piece Thompson Center	Encore
#526-000-060AT	Encore/Silver/One-piece Thompson Center	Encore

— Advise # — Dual Dovetail Rifle Base, 4K20Q65. . . . . \$26.99

**DUAL DOVETAIL MOUNT RINGS** - Heights from Low for small scopes to Super High for giant objective bells. Sold in Pairs.  
**SPECS:** Steel, Finish: PB, polished, blue; Matte, matte, blue; Silver, matte. Height is from top of base to center of rings.

STOCK #	DIAMETER/DESCRIPTION/FINISH	HEIGHT
#526-408-250AT	1"/Low/PB	.650"
#526-462-220AT	1"/Low/Matte	.650"
#526-523-130AT	1"/Low/Silver	.650"
#526-444-240AT	1"/Medium/PB	.770"
#526-462-250AT	1"/Medium/Matte	.770"
#526-523-230AT	1"/Medium/Silver	.770"
#526-470-540AT	1"/High/PB	.900"
#526-470-570AT	1"/High/Matte	.900"
#526-000-061AT	1"/High/Matte/Ext.	.900"
#526-470-640AT	1"/Super High/Matte	1"
#526-522-420AT	30mm/Low/Matte	.650"
#526-499-570AT	30mm/Medium/Matte	.770"
#526-499-580AT	30mm/High/Matte	.900"
#526-000-062AT	30mm/High/Matte/Ext.	.900"
#526-522-340AT	30mm/Super High/Matte	1"

— Advise # — 1" Dual Dovetail Rings, 4K25F73. . . . . \$30.99  
 — Advise # — 1" Extension Rings, High, 4K34A63. . . . . 41.49  
 — Advise # — 30mm Dual Dovetail Rings, 4K37A09. . . . . 41.49  
 — Advise # — 30mm Extension Rings, High, 4K49B64. . . . . 51.99

## LEUPOLD MARK 4 RINGS



**Rock-Solid, Heavy-Duty Mounts For Extreme Field & Tactical Use**

Heavy-duty rings are built to withstand extreme service without movement or loss of zero. Larger contact area between the scope/rings and base/receiver for less chance of movement. Large hex nuts on rings allow fast torquing of cross bolts for easy adjustment. Non reflective, matte finish. Mounting screws and Torx® head wrench included. **Steel Rings** - CNC machined from solid 11L17 cold-rolled bar stock, then blued. **Aluminum Rings** - CNC machined from 7075 T651 aluminum alloy and hardcoat anodized for maximum strength and wear resistance.

**SPECS:** Steel or aluminum, matte black finish 1" (2.5cm) or 30mm (1.18") inside diameter. Height from top of base to center of ring for both 1" and 30mm: Med. -.84" (2.1cm); High - 1.06" (2.7cm); Super High - 1.4" (3.5cm).

#526-000-085AT	1" Medium, Aluminum Rings, 4K139G99	\$ 139.99
#749-008-006AT	1" Medium, Steel Rings, 4K139B99	139.99
#749-008-007AT	30mm Medium Steel Rings, 4K139B99	139.99
#526-502-220AT	1" Super High, Steel Rings, 4K139G99	139.99
#526-000-086AT	1" Super High, Aluminum Rings, 4K139I99	139.99
#526-000-082AT	30mm Medium, Aluminum Rings, 4K139F99	139.99
#526-000-053AT	30mm High, Steel Rings, 4K139E99	139.99
#526-000-083AT	30mm High, Aluminum Rings, 4K139E99	139.99
#526-520-830AT	30mm Super High, Steel Rings, 4K139C99	139.99
#526-000-084AT	30mm Super High, Aluminum Rings, 4K139H99	139.99
#526-000-304AT	34mm High, Aluminum Rings, 4K149J99	149.99
#526-000-305AT	35mm High, Aluminum Rings, 4K149C99	149.99

## LEUPOLD RUGER® SAKO & CZ RINGS

Ringmounts Fit Directly Onto Factory Integral Bases



Famous Leupold styling and quality in rings that mount directly to the integral dovetails on Ruger, Sako, and CZ rifles.   
**SPECS:** Steel, high-polish blue (PB) or matte blue (MB) finish. Ring heights are from top of base to center of ring.

STOCK #	DIA./HT.	FINISH	FITS
#526-423-460AT	1"/Low .734"	PB	Ruger No.1 & 77/22®
#526-502-170AT	1"/Hi 1.150"	MB	Ruger No.1 & 77/22®
#526-499-520AT	1" High Rings	MB	Ruger M77®
#526-463-950AT	1" Super High Rings	PB	Ruger M77
#526-499-440AT	1" Super Hi Rings	MB	Ruger M77
#526-510-410AT	30mm Med Rings	MB	Ruger M77
#526-510-420AT	30mm Hi Rings	MB	Ruger M77
#526-510-430AT	30mm Super Hi Rings	MB	Ruger M77
#526-510-420AT	1"/Low .734"	PB	Sako
#526-423-430AT	1" Med Rings	PB	Sako
#526-000-306AT	34mm High	MB	Ruger M77
#526-461-900AT	1" Hi Rings	PB	Sako
#526-510-360AT	30mm Med Rings	MB	Sako
#526-510-370AT	30mm/Hi 1.05"	MB	Sako
#526-000-051AT	1" Med Rings	MB	CZ 550
#526-000-052AT	1" Med Rings	MB	CZ 527

— Advise # — 1" Ringmounts, 4K59I12. . . . . \$ 66.99  
 — Advise # — 30mm Ringmounts, 4K72D19. . . . . 81.99



## NIGHTFORCE 30MM TACTICAL RINGS

Extra Strong For Police & Military Applications

Milled from barstock, these rings provide the solid strength required for harsh field and tactical use. With four TORX screws per cap, the scope is securely locked into the ring to prevent recoil movement. Large, 1/2" hex nut lets you torque ring securely to any MIL-STD 1913 Picatinny base, and helps achieve a consistent return to zero. Steel cross lug provides additional strength, prevents shifting caused by recoil.   
**SPECS:** Steel, parkerized, matte finish. 30mm I.D. 1/2" (15.9mm) wide. Height measured from top of base to bottom of scope body: Low - .300" (7.6mm), High - .535" (13.6mm), Extra High - .782" (19.9mm). Fits Picatinny bases.

#524-000-001AT	Low Tactical Rings, 2E165P00. . . . .	\$ 165.00
#524-000-003AT	High Tactical Rings, 2E165G00. . . . .	165.00
#524-000-017AT	Extra High Tactical Rings, 2E165C00. . . . .	165.00

## TACTICAL PRECISION TSRTM™ & TSR "W" RINGS

Super Holding Power, Precision Alignment



Rugged tactical rings are precision machined to tolerances of .0002" for maximum scope/ring contact to hold scope securely against recoil. Four-screw cap lets you align the reticle, tighten the left side of the cap, then the right side without the scope rotating. Large clamp-nut lets you torque ring to base. Radiused edges and corners help prevent snagging while providing attractive appearance. **TSR** - 7075-T6 aluminum, fits MIL-STD 1913 Picatinny base. **TSR "W" Series** - 1215 alloy steel, fits Weaver bases. **34mm** - Accepts Schmidt & Bender-type 34mm scope tubes. **Heights** in tables below are measured from top of base to center of ring.

**SPECS:** 1/2" (15.8mm) wide. **TSR** - 7075-T6 Aluminum black, hard anodized to Mil-A-8625 standards. **TSR "W" Series** - 1215 alloy steel, Mil-C-13924 oxide finish, matte black.

### TSR ALUMINUM RINGS

STOCK #	HEIGHT	SIZE	PRICE
#100-000-951AT	Low - .785"	1"	9K70P63 \$ 86.99
#100-000-952AT	Med - .985"	1"	9K70D63 \$ 86.99
#100-000-953AT	High - 1.185"	1"	9K73C80 \$ 90.99
#100-000-957AT	Low - .925"	30mm	9K75L37 \$ 92.99
#100-000-958AT	Med - 1.075"	30mm	9K75B37 \$ 92.99
#100-000-959AT	High - 1.225"	30mm	9K78A52 \$ 96.99

### TSR "W" SERIES STEEL RINGS

STOCK #	HEIGHT	SIZE	PRICE
#100-001-403AT	Low - .785"	1"	9K85N49 \$ 96.99
#100-001-404AT	Med - .985"	1"	9K85L49 \$ 96.99
#100-001-405AT	High - 1.185"	1"	9K89J04 \$ 99.99
#100-001-409AT	Low - .925"	30mm	9K94F03 \$ 105.99
#100-001-410AT	Med - 1.075"	30mm	9K94P03 \$ 105.99
#100-001-411AT	High - 1.225"	30mm	9K97F46 \$ 109.99
#100-003-300AT	Med - 1.185"	34mm	9K128P23 \$ 144.99

## REDFIELD REMINGTON 700 LONG ACTION



JR 1-PIECE BASE

For Easy Scope Installation On Your Springfield Or Remington 700

Precision crafted of the finest tool steel. Built to take heaviest recoil without shooting loose. Streamlined for good looks, rugged for dependability. Matte black finish.

#750-532-126AT 1-Pc Rem 700 LA Scope Base, 5E22I15. . . . . \$ 24.99

## S&K

## NO-DRILL, NO-TAP SCOPE MOUNT



Easily Add A Scope To Bolt & Semi-Auto, Military & Sporters

Direct, bolt-on installation; no drilling and tapping required. Replace the original, open sights with the S&K Mount; install your favorite scope with a set of Weaver-style rings and go shooting. This is the easiest, quickest way we've seen to get smaller groups from these guns without making modifications that could hurt the resale or collector value. Precision-machined and finished in a matte black that doesn't reflect light. Blends in well with the original military finishes. The only way to go when scoping those extra-hard, stainless Mini-14s. Models with No rings feature a Weaver-style base; supplied without rings.   
**SPECS:** Base - Aluminum, black, matte, anodized or powder coated. Sizes vary. S&K 1" Rings - Steel, black, matte finish. Height: .140" (3.6mm) top of base to bottom of ring. Fits - No. 1 Mk III Lee Enfield, also includes instructions to fit Ishapore, .308 cal. rifles. Mini-14 will not fit Ranch or Mini-30. Mosin Nagant M44 and Schmidt-Rubin K31 replace rear sight, use long eye relief pistol or scout scopes, or dot sights.

STOCK #	FITS	RINGS	PRICE
#794-001-014AT	Mini-14 181 Series	No	4G55G53 \$ 66.99
#794-000-002AT	Mini-14 180 Series	No	4G55B47 \$ 66.99
#794-001-114AT	M1A/M14	No	4G62F75 \$ 76.99
#794-001-130AT	M1 Carbine	No	4G54I79 \$ 69.99
#794-001-100AT	M1 Garand	No	4G75P59 \$ 89.99
#794-000-011AT	Mosin Nagant M44	No	4G55G53 \$ 66.99
#794-001-111AT	No. 1 Mk III Lee Enf.	No	4G63P72 \$ 76.99
#794-001-045AT	4 and 5 Lee Enfield	No	4G54M79 \$ 69.99
#794-001-017AT	1917 Enfield	No	4G54Q79 \$ 69.99
#794-000-007AT	Schmidt Rubin K 31	S&K	4G62F97 \$ 75.99

**03A3 MOUNT** - No need to drill and tap a rock-hard Springfield with this No-Drill, No-Tap Mount. No need to bend the bolt, a simple grinding of the bolt handle for clearance is all that's needed. Blends in well with original finish.

**SPECS:** Alum., black, anodized. Uses standard Weaver-style 1" (2.5cm) rings, not supplied. Wt. 3 oz. (85 g). 5/16" (13.5cm) long.

#794-001-033AT S&K 03A3 Springfield Mount, 4G62J20. . . . . \$ 77.99

**U.S. KRAG MOUNT** - Easily installed with no drilling or tapping required. High tensile strength alloy base furnished with streamlined, S&K horizontally split rings.   
**SPECS:** Aluminum base, anodized black, matte. Steel rings, blue matte finish. Steel clamp screws.

#794-001-098AT S&K Krag Base, 4G87E37. . . . . \$ 105.99

**MOSIN NAGANT MOUNT** - No drilling, tapping or bolt modifications. Aluminum base replaces the rear sight, and accepts a long eye relief, scout or handgun scope. Includes S&K, horizontally split steel rings.

**SPECS:** Mount - Aluminum, anodized, black, matte finish. 1" Rings - Steel, blue, matte finish. M91 fits M91/30 and M91/59. M44 fits M44 Carbine.

#794-000-004AT M91 Mosin Nagant Mnt, 4G62K93. . . . . \$ 75.99  
 #794-000-005AT M44 Mosin Nagant Mnt, 4G62M97. . . . . 75.99

**S&K 96 & 98 MAUSER** - Tough, light aluminum mount clamps securely to receiver; no drilling or tapping required. Fits bent bolt models only, others will require bolt modification. Includes S&K rings. Requires minor stock modification.

**SPECS:** Mount - Aluminum, anodized, black, matte finish. 5/16" (13.3cm) long. 1" Rings - Steel, blue, matte finish.

#794-000-003AT S&K 98 Mauser Mount, 4G88A67. . . . . \$ 107.99  
 #794-000-006AT S&K 96 Mauser Mount, 4G66H10. . . . . 75.99

## RUGER® FACTORY SCOPE RINGS

For Precise, Solid Scope Mounting On Ruger Rifles & Handguns

High-quality Ruger factory rings install easily and provide solid, zero-movement scope attachment to Ruger rifles and handguns with integral bases, No. 1 rifles with factory base, and No. 3 rifles with special factory bases available below. Low, Medium, High, and Extra-High heights in blued carbon steel, natural stainless steel, or stainless with Ruger's proprietary matte Target Grey® finish.

**RINGS FOR: No. 1, No. 3, Mark II Pistol, 77/22®, 77/22® Mag., Mini-14® Ranch Rifle, Mini-Thirty®, Redhawk® Available as single rings only. Order two (2) of the same ring for these firearm models.**

*SPECS: Carbon steel, polished blue finish (BL), stainless steel, natural (SS), or Target Grey® (TG) finish. Ring heights measured from top of base to bottom of scope tube. Low - .325". Medium (Med.) - .435". High - .565". Extra-High (X-High) - .680".*

STOCK #	RUGER PART #	HEIGHT	FINISH
<b>1" RINGS</b>			
#834-000-002AT	3B	Low/Med.	BL
#834-000-005AT	3K	Low/Med.	SS
#780-001-250AT	3KTG	Low/Med.	TG
#834-000-003AT	4B	Med./High	BL
#834-000-006AT	4K	Med./High	SS
#834-003-001AT	4KHM	Med.	Matte SS
#780-001-248AT	4KTG	Med./High	TG
#834-000-004AT	5B	Med./High	BL
#834-000-007AT	5K	High/X-High	SS
#780-001-249AT	5KTG	High/X-High	TG
#834-003-002AT	6B	High/X-High	BL
#834-000-008AT	6K	High/X-High	SS

### RINGS FOR: M77®, M77 MARK II & SUPER REDHAWK®

These models require front and rear scope rings of different heights. On M77/M77 Mark II, the shorter ring always mounts at the front of the receiver and the higher ring at the rear. On the Super Redhawk, the higher ring is always at the front of the frame and the lower ring at the rear.

Available as single rings only. Order one (1) FRONT and one (1) REAR ring from table below.

STK# FRONT	RUGER PART #	STK# REAR	RUGER PART #	HEIGHT	FINISH
<b>1" RINGS</b>					
#834-000-002AT	3B	#834-000-003AT	4B	Low/Med.	BL
#834-000-005AT	3K	#834-000-006AT	4K	Low/Med.	SS
#780-001-250AT	3KTG	#780-001-248AT	4KTG	Low/Med.	TG
#834-000-003AT	4B	#834-000-004AT	5B	Med./High	BL
#834-000-006AT	4K	#834-000-007AT	5K	Med./High	SS
#780-001-248AT	4KTG	#780-001-249AT	5KTG	Med./High	TG
#834-000-004AT	5B	#834-003-002AT	6B	Med./High	BL
#834-000-007AT	5K	#834-000-008AT	6K	High/X-High	SS
#780-001-249AT	5KTG	#780-001-251AT	6KTG	High/X-High	TG
<b>30mm RINGS</b>					
#834-008-001AT	4B30	#834-008-002AT	5B30	Med./High	BL

— Advise # — Ruger Scope Rings (all colors), each, 8G31E86 ..... \$ 34.99

**RUGER 10/22® SCOPE BASE ADAPTER** - Mounts to the top of the 10/22 receiver and allows the 10/22 to accept any ring designed for .22 rifles with dovetailed receivers.

#780-004-222AT 10/22 Scope Base Adapter, 8G8K18 ..... \$ 9.99

## REDFIELD SPLIT RINGS

Proven Strength, Gracefully Sculptured For Great Looks

Beautiful, Streamlined Split Rings, precision-made of hardened steel. Rotary dovetail engineering to .0004", guaranteed not to shoot loose on any rifle fired from the shoulder.



*SPECS: Sold in pairs. Available in Polished Blue (PB) or Matte Blue (MB). Heights measured from top of base to inside bottom of ring. METRIC: 1" (2.54cm).*

STOCK #	DIA./HEIGHT	FINISH	PRICE
#750-522-639AT	1" High .400"	PB	5E30M72 \$ 33.99
#750-522-708AT	1" Super-Hi .500"	MB	5E35G26 \$ 38.99
#750-523-702AT	30mm/High .490"	PB	5E49D76 \$ 53.99



## S&K SCULPTURED MOUNTS & KONTOURED RINGS

Almost-Invisible Rings, Plus Light, Cutaway Bases

One of the slickest, smoothest ring/base combinations ever. The ring is split, vertically, at the mounting post with absolutely no screws or even any "lumps," just wrap it around the scope, squeeze together and slip the post into the S&K base. Dual opposed, conical screws serve as ring clamp screws, and also provide windage and alignment adjustments. Sculptured bases give a "finished" look and save weight.

*SPECS: Steel, blue, matte finish. Bases (Rem 700) weigh 2.1 oz (59.5 g). Rings, 1" or 30mm, 1.1 oz (31 g). Approximate ring height from top of base to center of ring. 1" Low - .642" (16.3mm), 1" High - .778" (19.7mm), 30mm Low - .732" (18.6mm), 30mm High - .950" (24.1mm). Rings and bases available in pairs only.*

STOCK #	FITS	PRICE
#794-525-098AT	Mauser 98, military & comm., 1.4" dia.	
#794-525-096AT	Mauser 96, small ring, 1.2" dia.	
#794-525-700AT	Remington 700/721/722/725 long & short	
#794-525-070AT	Winchester 70 std, 670, 770	
— Advise # — Sculptured Mount Base, 4G37A35 ..... \$ 45.99		
#794-500-100AT	Low 1" Kontoured Rings, 4G46G68	\$ 56.99
#794-500-102AT	High 1" Kontoured Rings, 4G51L11	\$ 62.99
#794-000-001AT	Low 30mm Kontoured Rings, 4G60K74	\$ 73.99
#794-500-030AT	High 30mm Kontoured Rings, 4G65M19	\$ 79.99

## TALLEY THOMPSON CENTER ENCORE RINGS & BASE

Lightweight, Durable & Practical  
One-piece ring and base eliminates the joint between the ring and base to provide a rigid mounting platform that reduces ring alignment problems and prevents kinking a scope. Surprisingly lightweight yet durable, machined from high-grade aluminum, these rings won't add a lot of extra weight that can bog you down at the range or in the field. Accepts 1" diameter scope tubes.

*SPECS: Extruded, CNC machined 7000 series aluminum, black. Fits scopes with 1" diameter tubes. Low fits scopes up to 44 mm objective with standard barrel contour. Medium fits scopes up to 50 mm objective with standard barrel contour. High fits scopes with a 56 mm objective with standard barrel contour. Four mounting screws and Allen wrench included.*

#874-000-089AT	TC Encore Rings & Base, Low, 4G51F55	\$ 56.99
#874-000-090AT	TC Encore Rings & Base, Medium, 4G51N55	\$ 56.99
#874-000-091AT	TC Encore Rings & Base, High, 4G51E55	\$ 56.99

## TALLEY RIMFIRE SCOPE RINGS

Provide Precise Fit To Receiver

Machined from steel bar stock to provide a strong mounting system with a smooth profile. Precision cut dovetails have the correct angle for an exact fit. Torx® clamp screws snug down tightly for maximum holding power.



*SPECS: Steel, blue, satin finish. Accept 1" scopes. Height from top of base to bottom of ring: Low - .313" (8mm), High - .600" (15.2mm). Sold in pairs.*

STOCK #	FITS	PRICE
#874-000-008AT	Anschutz rings, Low	4G47F55 \$ 52.95
#874-000-084AT	Anschutz rings, High	4G47H55 \$ 52.95
#874-000-009AT	CZ .22 Rimfire rings, Low	4G47M55 \$ 52.95
#874-000-109AT	CZ .22 Rimfire rings, High	4G47D55 \$ 52.95
#874-000-010AT	CZ .22 Hornet rings, Low	4G74I50 \$ 82.95

## TACTICAL PRECISION HRT™ RINGS

Superior Scope-To-Ring Contact With A Slim-Line Look

Precision, CNC-machined, tactical rings offer superior holding power in a smooth, contoured design for light weight and minimum bulk. Made from 7075 aluminum billet or extra strong, 1215 steel alloy. Guaranteed, .0002" cylindrical roundness between ring base and top strap ensures excellent tube-to-ring contact; prevents scope tube "pinch" and eliminates the need to lap prior to scope mounting. Steel alloy, cross-bolt and hex nut gives positive locking on Picatinny and Weaver style bases. Four, Torx® head screws prevent scope shift under the heaviest recoil. Sold in pairs.

STOCK #	HGT	MATERIAL	SIZE	PRICE
#100-001-474AT	Medium	Steel	1"	9K85L49 \$ 96.99
#100-001-475AT	High	Steel	1"	9K89K04 \$ 99.99
#100-001-476AT	Medium	Alum	1"	9K70M63 \$ 86.99
#100-001-477AT	High	Alum	1"	9K73N80 \$ 90.99
#100-001-478AT	Medium	Steel	30mm	9K94C03 \$ 105.99
#100-001-479AT	High	Steel	30mm	9K97Q46 \$ 109.99
#100-001-480AT	Medium	Alum	30mm	9K75D37 \$ 92.99
#100-001-481AT	High	Alum	30mm	9K78N52 \$ 96.99

## TALLEY TACTICAL SCOPE RINGS



Billet Machined For Strength; Dual Recoil Lugs Stay Put

Heavy-duty scope rings are precision-machined from solid billet aluminum with dual recoil lugs to ensure your tactical scope won't budge under the heaviest recoil. Full-width ring caps are cut from the same billet as the bottom half of the ring for precise fit and held in place with four stainless steel Allen head screws that won't work loose when properly tightened. Matching serial numbers ensure you always mate the cap with the bottom it came with. Locking bar, heavy-duty crossbolt and oversized, 1/2" hex nut locks the ring to any MIL-STD-1913 Picatinny rail. Hard-anodized for extra surface strength, with a non-reflective matte black finish. Engraved front and back with the distinctive Talley cross-bones logo.

*SPECS: 7075 T6 aluminum, hardcoat anodized, matte black, with 303 stainless steel screws, black finish. 1.9" (5cm) wide, .665" (16.8mm) thick. Models available for 1" (2.5cm) or 30mm O.D. scope tubes. Heights measured from top of base to center of ring: Low - 1" (2.5cm), High - 1.275" (3.2cm).*

#874-000-114AT	1" Tactical Rings, High, 4G189K45	\$ 210.95
#874-000-115AT	30mm Tactical Rings, Low, 4G189H45	\$ 210.95
#874-000-117AT	30mm Tactical Rings, High, 4G189C45	\$ 210.95

TALLEY

LIGHTWEIGHT SCOPE MOUNT



When Every Ounce Counts:  
The Strength Of Steel  
Without The Weight

One-piece construction blends the ring and base into a single unit. Eliminating the ring/base joint not only keeps weight to a minimum, it provides a stronger mount. Each ring cap is 3/8" wide, with four TORX screws to keep large scopes from slipping or shifting. Designed by Mel Forbes of New Ultralight Arms. **SPECS:** 7000 series aluminum, black, anodized, matte finish. Accepts 1" dia. scopes, unless otherwise listed in fits column for 30mm dia. scopes. Height from bottom of ring to top of receiver: **Low** - .400" (10.1mm), **Med** - .500" (12.7mm), **High** - .640" (16.3mm), **X-High** - .740" (18.8mm). Approx. weight 2.1 oz. (59 g). Some heights vary, see chart below. **Rem. 700** also fits 721/722/725 and 40X models. **Rem. Model Seven** fits receivers with four screw holes. **Savage AccuTrigger** fits round top centerfire receivers with AccuTrigger. **Win. 70** fits .860" rear hole spacing only.

STOCK #	FITS	HEIGHT	PRICE
#874-000-026AT	Anschutz 54	Med	4G41M94 \$ 47.99
#874-000-027AT	Browning A Bolt	Low	4G41Q94 \$ 47.99
#874-000-028AT	Browning A Bolt	Med	4G41H94 \$ 47.99
#874-000-041AT	Howa	Low	4G41G94 \$ 47.99
#874-000-042AT	Howa	Med	4G41A94 \$ 47.99
#874-000-037AT	98 Mauser Lg Ring	Low	4G41H94 \$ 47.99
#874-000-039AT	Marlin 336/1895 (.500")	Low	4G41N94 \$ 47.99
#874-000-040AT	Marlin 336/1895 (.600")	Med	4G41P94 \$ 47.99
#874-000-110AT	Rem. 700 30mm	Low	4G41H94 \$ 47.99
#874-000-111AT	Rem. 700 30mm	Med	4G41D94 \$ 47.99
#874-000-043AT	Rem. 700 Ext.	Low	4G41C94 \$ 47.99
#874-000-044AT	Rem. 700 Ext.	Med	4G41L94 \$ 47.99
#874-000-047AT	Rem. Model Seven	Low	4G41A94 \$ 47.99
#874-000-048AT	Rem. Model Seven	Med	4G41H94 \$ 47.99
#874-000-049AT	Ruger® 10/22®	Low	4G41P94 \$ 47.99
#874-000-050AT	Ruger 10/22	Med	4G41A94 \$ 47.99
#874-000-093AT	Sav. AccuTrigger	Low	4G41E94 \$ 47.99
#874-000-094AT	Sav. AccuTrigger	Low Ext.	4G41B94 \$ 47.99
#874-000-096AT	Sav. AccuTrigger	Med Ext.	4G41J94 \$ 47.99
#874-000-102AT	Sav. AccuTrigger	High	4G41H94 \$ 47.99
#874-000-103AT	Sav. AccuTrigger	X-High	4G41E94 \$ 47.99
#874-000-055AT	Tikka (.500" high)	Low	4G41M94 \$ 47.99
#874-000-056AT	Tikka (.600" high)	Med	4G41G94 \$ 47.99
#874-000-060AT	Wthby Mark V	Med	4G41E94 \$ 47.99
#874-000-063AT	Win. 70 .860" Rear	Low	4G41P94 \$ 47.99
#874-000-064AT	Win. 70 .860" Rear	Med	4G41B94 \$ 47.99
#874-000-065AT	Win. 70 .860" Rear F/Ext.	Low	4G41G94 \$ 47.99

VORTEX  
VIPER SCOPE RINGS



Machined from 6061-T6 aluminum and anodized for scratch and corrosion resistance, these durable rings fit either Picatinny or Weaver rails. Positive engagement of the ring to the base is provided by the square-edged crossbolt. Four T-15 Torx style socket cap screws securely hold the scope against heavy recoil or bumps in the field. Unique design permits easy scope mounting and removal from the side of the ring set without removing the entire ring from your rifle. **USA**

#100-013-136AT	30mm Rings, Low, 3B00NGF.....	\$ 59.99
#100-013-137AT	30mm Rings, Medium, 3B00XPX.....	59.99
#100-013-138AT	30mm Rings, High, 3B00MEE.....	59.99
#100-013-139AT	1" Rings, Low, 3B00NGN.....	54.99
#100-013-140AT	1" Rings, Medium, 3B00QYJ.....	54.99
#100-013-141AT	1" Rings, High, 3B00DVJ.....	54.99

TALLEY SCOPE RINGS & BASES



Fixed Or Quick Detach Models Anchor Solidly To Shouldered Bases;  
Provides A Clean, Uniform Look

Beautifully machined from solid, steel or stainless steel bar stock to form a rock-solid scope mounting system that looks as good as it functions. Vertically-split ring design with dual screws provides maximum holding power for scopes with 1" or 30mm diameter tubes. Rings lock securely into unique, dovetail bases featuring a double shoulder that completely prevents any movement, and counters the heaviest recoil. Together, they create a clean, contoured appearance on any sport-rifle. **USA**

**QUICK DETACH RINGS** - Include precision machined, QD levers for fast, easy scope installation and removal, plus button-head screws for optional fixed ring application if desired.

**SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Models available for 1" or 30mm diameter scope tubes. Ring heights measured from top of base to bottom of ring. **Low** - .300" (7.62mm), **Medium** - .400" (10.16mm), **High** - .500" (12.7mm), **X High** - .600" (15.2mm). Fit Talley bases only. Available in pairs.

STOCK #	HEIGHT	SIZE	FINISH	PRICE
#874-025-101AT	Low	1"	Blue	4G104N82 \$ 115.99
#874-000-104AT	Low	1"	SS	4G129G99 \$ 129.99
#874-025-102AT	Medium	1"	Blue	4G105O87 \$ 118.99
#874-025-103AT	High	1"	Blue	4G104I01 \$ 115.95
#874-025-104AT	X High	1"	Blue	4G105C95 \$ 117.95
#874-025-301AT	Low	30mm	Blue	4G105J95 \$ 117.95
#874-025-302AT	Medium	30mm	Blue	4G105J95 \$ 117.95
#874-025-303AT	High	30mm	Blue	4G105B95 \$ 117.95
#874-000-080AT	X High	30mm	Blue	4G105L95 \$ 117.95

**FIXED SCOPE RINGS** - include low-profile, button-head Torx® screws for mounting applications where permanent scope mounting is preferred.

**SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Models available for 1" or 30mm diameter scope tubes. Ring heights measured from top of base to bottom of ring. **Low** - .300" (7.62mm), **Medium** - .400" (10.16mm), **High** - .500" (12.7mm), **X High** - .600" (15.2mm). Fit Talley bases only. Available in pairs.

STOCK #	HEIGHT	SIZE	FINISH	PRICE
#874-000-001AT	Low	1"	Blue	4G65G51 \$ 72.95
#874-000-106AT	Low	1"	SS	4G105Q04 \$ 116.95
#874-000-002AT	Medium	1"	Blue	4G65A51 \$ 72.95
#874-000-107AT	Medium	1"	SS	4G105K04 \$ 116.95
#874-000-003AT	High	1"	Blue	4G65G51 \$ 72.95
#874-000-005AT	Low	30mm	Blue	4G65P51 \$ 72.95
#874-000-006AT	Medium	30mm	Blue	4G65Q51 \$ 72.95
#874-000-007AT	High	30mm	Blue	4G65F51 \$ 72.95
#874-000-081AT	X High	30mm	Blue	4G65F51 \$ 72.95

**SCOPE RING BASES** - Feature Talley's proven, machined saddle design with double recoil shoulders to completely immobilize the rings under heavy recoil. Bases accept both Fixed and QD Talley rings.

**SPECS:** Steel, blue, satin finish or stainless steel (SS), natural finish. Available in pairs. Accept Talley Fixed or QD rings only.

STOCK #	HOLE SPACING	FITS	FINISH	PRICE
#874-000-017AT	-	Browning A-Bolt (except Titanium model)	Blue	4G26N90 \$ 29.95
#874-026-098AT	-	Mauser 98	Blue	4G26C90 \$ 29.95
#874-026-701AT	-	Rem. 700, 721, 722, 725, 40X/Howa	Blue	4G26N90 \$ 29.95
#874-000-105AT	-	Rem. 700, 721, 722, 725, 40X/Howa	SS	4G40D37 \$ 44.95
#874-000-021AT	-	Rem. 700 Extension front/std rear	Blue	4G40P37 \$ 44.95
#874-000-075AT	-	Sako Long, L61R, L691, M995, IV, V	Blue	4G40L37 \$ 44.95
#874-000-077AT	-	Sako Short, L461, L579, S491, M591, I, II, III	Blue	4G40A37 \$ 44.95
#874-000-097AT	-	Savage Accutrigger Std.	Blue	4G26F90 \$ 29.95
#874-000-079AT	-	Thompson Center Encore	Blue	4G40B37 \$ 44.95
#874-026-010AT	-	Weatherby Mk V 9-lug bolt	Blue	4G25I49 \$ 26.99
#874-026-070AT	.860"	Win. 70, all except Magnums	Blue	4G26Q90 \$ 29.95
#874-026-071AT	.435"	Win. 70, Pre '64 .300 & .375 Mag.	Blue	4G26G90 \$ 29.95
#874-026-072AT	.330"	Win. 70, Post '64 .300 & .375 Mag.	Blue	4G26K90 \$ 29.95



VORTEX MATCHED RINGS

Manufactured In Pairs For Precision Fit



Machined to .0005" tolerances from 7075 T6 billet aluminum, these scope rings are kept in numbered pairs throughout the manufacturing process for precise fitting and alignment with your scope tube. Perfect for large-diameter, light-gathering scope tubes being used for tactical, and long-range applications. Vibratory tumbling, followed by a hand bead-blasting process ensures that these rings won't snag on clothing or other gear. Type III hard coat anodizing eliminates surface reflections, and enhances surface abrasion resistance. Grade 8 fasteners lock the rings and scope securely to your weapon with the supplied Torx wrench. Select models fit Weaver mounts. **USA**  
**SPECS:** 7075 T6 billet aluminum, Type III hard coat anodized, matte black. Available for 35mm, 34mm, and 30mm scopes. Height measured from base to center of scope.

STOCK #	SIZE	HEIGHT	PRICE
#100-006-719AT	35mm	Med-.95"	3B149G99 \$ 149.99
#100-013-129AT	35mm	Med.-Plus 1"	3B00LWQ \$ 149.99
#100-006-720AT	35mm	High 1.26"	3B149L99 \$ 149.99
#100-013-132AT	34mm	Med-.92"	3B00BRN \$ 149.99
#100-013-131AT	34mm	Med.-Plus 1"	3B00CXC \$ 149.99
#100-017-325AT	34mm	Med.-High 1.1"	3B149A99 \$ 149.99
#100-013-130AT	34mm	High 1.26"	3B00ILP \$ 149.99
#100-017-324AT	34mm	Extra-High 1.45"	3B149Q99 \$ 149.99
#100-013-135AT	30mm	Low-.87"	3B00PRK \$ 129.99
#100-013-134AT	30mm	Med-.97"	3B00DRH \$ 129.99
#100-013-133AT	30mm	High 1.26"	3B00IFK \$ 129.99
NEW 100-019-180AT	30mm	Extra-High 1.45"	3B00GZM \$ 129.99
NEW 100-019-181AT	30mm	Med-.97"	3B00PAI \$ 129.99
NEW 100-019-182AT	1"	Low .76"	3B00PSG \$ 129.99

VORTEX  
TACTICAL 30MM  
SCOPE RINGS



These wide, 6-screw tactical rifle scope rings securely mount your scope to any Picatinny or Weaver type rails. Rings offer solid support for scopes with 30mm tubes. Sold one ring per package.


#100-013-148AT	30mm Tactical Ring, Low, 3B00FXJ ..	\$ 19.99
#100-013-149AT	30mm Tactical Ring, Medium, 3B00AHG .....	19.99
#100-013-150AT	30mm Tactical Ring, High, 3B00CWR .....	19.99
#100-013-151AT	30mm Tactical Ring w/ Co-Witness, Extra-High Absolute, 3B00LPB.....	19.99
#100-013-152AT	30mm Tactical Ring w/ 1/3 Co-Witness, Extra-High Lower, 3B00MWP.....	19.99



SATISFACTION GUARANTEED  
SINCE 1939

## WARNE MAXIMA 2-PIECE BASE SETS

### Weaver-Style In Steel

Smooth, solid steel two-piece bases provide an extra strong mount system. Accept Warne Maxima rings or any Weaver-style ring. Three finishes.    
**SPECS:** 12L14 steel. Available in polished blue, matte blue, or silver. Two-piece only. Includes mounting screws. Do not mix Maxima bases with other brands of Weaver-style base, the heights are often different. RHS = Rear Hole Spacing.



STK# POLISHED	STK# MATTE	STK# SILVER	FITS
#947-000-153AT	#947-000-154AT	NA	Anschutz (All); Marlin A1, 50
#947-000-155AT	#947-000-156AT	#947-000-209AT	Browning A-Bolt .22, Micro-Medallion; Steyr SBS
#947-000-159AT	#947-000-160AT	#947-000-211AT	Browning BAR, BAR II, Mark II, BLR Lightning, BPR, T-Bolt; Colt Coltsman, 264 & 30-06 Round Top (Enfield/Rem 30 style); Marlin Camp 9 & 45; Rem 30 & 720; Sav 40 & 45; Win SXR
#947-000-161AT	#947-000-162AT	NA	Browning BLR (steel receiver); Colt 223, 243 & 308 Round Top; Sauer SHR Pro Hunter
NA	#947-000-406AT	#947-000-407AT	CVA-V2 Round Barrel Ext Rear
#947-000-165AT	#947-000-166AT	NA	Knight Disc/Revolution; Mossberg 680, 695, 800, 50, 51, 151, 350, 351, 352; Rem 541-T, 541-S; Western Field 775, 780
#947-000-167AT	#947-000-168AT	#947-000-215AT	Marlin 9, 45, 30AS, 36, 62, 93, 336, 336C, 375, 1893, 1894 Cowboy, 1895, 444; Glenfield 30, Zane Grey, 989, 22 Auto (.500" hole spacing)
#947-000-169AT	#947-000-170AT	NA	Mauser 98 altered; Mauser FN (military model); Charles Daly; CIL 972; Colt 57; H&R (pre 1973) 300, 301, 330, 370; Interarms Mark X & Viscount; Marlin 455; Musgrave MK III & IV; Parker Hale 1000, 1000C, 1100, 1200, 1700; Rem 798; Voere 2150, 2165-1, 2165-2, 2165-3, 2165-4
#947-000-171AT	#947-000-172AT	NA	Mauser 98 unaltered
#947-000-173AT	#947-000-174AT	NA	Mauser Small Ring 96 altered; High Standard High Power; Herters J-9; Husqvarna HVA Small Ring; HVA 1600 & 1900; Mauser Small Ring G33-40; Sears 511
#947-000-175AT	#947-000-176AT	NA	Mauser Small Ring 96 unaltered
#947-000-177AT	#947-000-178AT	#947-000-220AT	Rem 700, 78, 721, 722, 725, 700 Muzzle Loader; BSA Monarch; Churchill Highlander; Herters U-9 Round Top; Howa 1500 & 1700; Mossberg 1500 & 1700; Raptor Arms long action; S&W 1500, 1600, 1700; Weatherby Vanguard
#947-000-179AT	#947-000-180AT	NA	Rem New Mdl Seven, 600, 660, 670, 673, XP-100
#947-000-183AT	#947-000-181AT	NA	Charles Daly Mini Mauser; Interarms Mk X Mini Mauser, Rem 799
#947-000-403AT	NA	#947-000-405AT	Ruger® American Rimfire®
#947-000-188AT	#947-000-189AT	NA	Sauer 202
#947-000-192AT	#947-000-193AT	#947-000-227AT	Savage Accu-Trigger; Carl Gustav 2000; Navy Arms Country Boy Muzzle Loader; All Center Fire; Shilen Round Receiver; Stevens 200; Win 88 & 100
#947-000-194AT	NA	NA	Steyr Mannlicher L & LS
#947-000-196AT	#947-000-197AT	NA	Steyr Mannlicher M & MS
#947-000-200AT	#947-000-201AT	NA	Weatherby Mark V Magnum
#947-000-202AT	#947-000-203AT	#947-000-232AT	Win 670, 770, Win 70 Std. Pre & Post 64 with .860 RHS, WSM; Enfield Win 70-style; Kimber M89 BGR; Montana
NA	#947-000-244AT	NA	Kimber 84
NA	#947-000-245AT	NA	Kimber 8400
NA	#947-000-404AT	NA	Ruger® American Rimfire®
NA	#947-000-182AT	NA	Benelli Black Eagle, Super Black Eagle Shotgun; Rem 7400, 7600, 76, 74, FOUR, SIX, New 750
NA	#947-000-185AT	NA	Ruger® <sup>10/22</sup> ® .22LR
NA	#947-000-191AT	NA	Savage pre-2003 bolt action flat receiver
NA	#947-000-199AT	NA	Weatherby Mark V Standard & .240WM
NA	#947-000-205AT	#947-000-233AT	Win 70 Post 64 Magnum .330 RHS
NA	#947-000-207AT	NA	Win 70 WSSM
— Advise # —	Maxima Base Set, Polished Blue or Matte Blue, 7D22E62		\$ 26.34
— Advise # —	Maxima Base Set, Silver, 7D25E32		29.74

## WARNE 7.3/.22 RINGS



Smooth Profile, Horizontal Split;  
Fit A Wide Variety Of Rimfire Rifles

Rugged, all-steel rings fit rifles with 3/8" or 11mm dovetail grooves. Reversible clamp flips to give you .010" nominal adjustment to ensure tight clamping. Ring straps secured with two screws each. Available in Matte, Gloss Black or Silver.    
**SPECS:** Steel, powder coated, black, matte or gloss

finish. Height measured from top of base to inside, bottom of ring. Medium - .406" (10.3mm) nominal high. High - .525" (13.3mm) nominal high. **QD Rings:** Medium - .413" (10.5mm) nominal high.

STOCK #	DIA./HEIGHT	FINISH	PRICE
#947-000-096AT	1"/Med. Grooved	Matte	7D25G68 \$ 30.17
#947-000-097AT	1"/Med. Grooved	Gloss	7D25Q94 \$ 36.12
#947-000-098AT	1"/High Grooved	Matte	7D25H68 \$ 30.17
#947-000-099AT	1"/High Grooved	Gloss	7D25P94 \$ 36.12

## WARNE MAXIMA TACTICAL RINGS & BASES

Rigid, Steel Construction  
For Maximum Strength



Picatinny tactical rings and bases, precision-machined from steel for maximum strength and reliability. Rugged, 1" and 30mm **Tactical Rings** feature a robust, stainless steel crosslug that will not swage,peen or deform under heavy recoil. Ensures consistent return-to-zero for optics that are removed and re-attached. Three, torx-style fasteners secure the vertically split ring halves at the top to prevent scope shift. Large, clamping nut at bottom provides exceptional holding power. One-piece, **Tactical Bases** are made from solid bar stock of cold drawn alloy steel, stress relieved for extra strength and uniformity. Available for standard elevation adjustment or with 20 MOA forward angle for extra long range shooting.    
**SPECS:** Rings: Steel, matte black, powder coat finish. Medium - .375" (9.5mm) high. High - .525" (13.3mm) high. Extra-High - .650" (16.5mm) high. Ultra-High - .935" (23.7mm) high. Bases: 12L14 carbon steel, powder coated, matte black. Available in standard or 20 MOA. Savage bases available for models with and without AccuTrigger™ (Accu). Winchester bases fit current production Model 70.


STOCK #	DIA./HEIGHT	PRICE
#947-000-113AT	1"/Medium	7D98P17 \$ 110.49
#947-000-121AT	1"/High	7D98M17 \$ 110.49
#947-000-122AT	1"/Extra-High	7D98J17 \$ 110.49
#947-000-123AT	1"/Ultra-High	7D98P17 \$ 110.49
#947-000-112AT	30mm/Medium	7D104L81 \$ 118.99
#947-000-125AT	30mm/High	7D104D81 \$ 118.99
#947-000-126AT	30mm/Extra-High	7D104F81 \$ 118.99
#947-000-127AT	30mm/Ultra-High	7D104C81 \$ 118.99

STOCK #	HEIGHT/FITS	PRICE
#947-000-392AT	Std/A-Bolt 3 SA	7D90E93 \$ 101.99
#947-000-394AT	Std/A-Bolt 3 LA	7D90K59 \$ 101.99
#947-000-396AT	Std/Nosler M48 SA	7D90N93 \$ 101.99
#947-000-398AT	Std/Nosler M48 LA	7D90L93 \$ 101.99
#947-000-128AT	Std/Rem 700 SA	7D87A38 \$ 101.99
#947-000-129AT	Std/Rem 700 LA	7D87J38 \$ 101.99
#947-000-262AT	Std/Rem 870/1100	7D89A13 \$ 101.99
#947-000-400AT	Std/Ruger® American Rifle® SA	7D90B59 \$ 101.99
#947-000-402AT	Std/Ruger® American Rifle® LA	7D90P93 \$ 101.99
#947-000-130AT	Std/Sako TRG	7D87E38 \$ 101.99
#947-000-131AT	Std/Savage SA	7D87J38 \$ 101.99
#947-000-132AT	Std/Savage LA	7D87C38 \$ 101.99
#947-000-133AT	Std/Savage SA, Accu	7D87J38 \$ 101.99
#947-000-134AT	Std/Savage LA, Accu	7D87M38 \$ 101.99
#947-000-390AT	Std/Savage B-Mag Aluminum	7D34Q29 \$ 38.24
#947-000-135AT	Std/Win 70 SA	7D87F38 \$ 101.99
#947-000-136AT	Std/Win 70 LA	7D87J38 \$ 101.99
#947-000-391AT	20 MOA/A-Bolt 3 SA	7D106P08 \$ 118.99
#947-000-393AT	20 MOA/A-Bolt 3 LA	7D105H68 \$ 118.99
#947-000-395AT	20 MOA/Nosler M48 SA	7D106H08 \$ 118.99
#947-000-397AT	20 MOA/Nosler M48 LA	7D105J68 \$ 118.99
#947-000-138AT	20 MOA/Rem700 SA	7D102H09 \$ 107.99
#947-000-139AT	20 MOA/Rem 700 LA	7D102C09 \$ 107.99
#947-000-399AT	20 MOA/Ruger® American Rifle® SA	7D106N08 \$ 118.99
#947-000-401AT	20 MOA/Ruger® American Rifle® LA	7D106J08 \$ 118.99
#947-000-140AT	20 MOA/Sako TRG	7D102K09 \$ 107.99
#947-000-141AT	20 MOA/Savage SA	7D102B09 \$ 107.99
#947-000-143AT	20 MOA/Savage SA, Accu	7D102H09 \$ 107.99
#947-000-144AT	20 MOA/Savage LA, Accu	7D102K09 \$ 107.99
#947-000-146AT	20 MOA/Win 70 LA	7D102B09 \$ 107.99

## BROWNELLS/WARNE 7.3 SERIES RINGS & BASES

Smooth Profile, Horizontal Split;  
For Centerfire & Rimfire



Unique, double-duty 1" rings feature a removable recoil lug that lets them fit Warne Premier bases and .22 rimfire rifles. Four screws evenly draw the cap onto the base and keep the scope from rotating as you tighten the cap. Reversible clamp, with 60° dovetail, provides optimum fit to Brownells/Warne 7.3 bases (sold below) or nominal 3/8" dovetail.    
**SPECS:** Steel, powder coated, black, matte finish. Height measured from top of base to inside, bottom of ring.

STOCK #	DIAMETER	HEIGHT	PRICE
#947-000-076AT	1"	Low - .325"	7D35N79 \$ 39.99
#947-000-078AT	1"	Med - .425"	7D35P79 \$ 39.99
#947-000-080AT	1"	High - .550"	7D35C79 \$ 39.99
#947-000-082AT	1"	Ex High - .715"	7D35A79 \$ 39.99

**7.3 SERIES BASES** - Heavy-duty machined steel bases feature a heavy recoil shoulder to provide a solid, low-profile, zero-movement mount for Brownells/Warne 7.3 Series Rings. Low profile adds minimal bulk to your rifle and maintains a sleek appearance. Fast, easy installation; mounting instructions included.    
**SPECS:** Steel, blued, matte finish. Includes mounting screws. Accepts Brownells/Warne 7.3 rings, or any rings designed to fit nominal 3/8" (11mm) dovetail.   
**#947-000-254AT** 7.3 Base, Mauser 98, 7D19G90 . . . . . \$ 21.99  
**#947-000-248AT** 7.3 Base, Rem. 700, 7D19J90 . . . . . 21.99  
**#947-000-249AT** 7.3 Base, Win. 70, 7D19D90 . . . . . 21.99

## VORTEX HUNTER SCOPE RINGS




Constructed of aircraft grade 6061-T6 aluminum, these rings solidly attach to Picatinny or Weaver-style bases. The standard, 2-screw hunter rings are ideal for general hunting setups. Anodized finish helps resist scratches and corrosion.   
**#100-013-142AT** 30mm Hunter Rings, Low, 3B00GLK . . \$ 19.99  
**#100-013-143AT** 30mm Hunter Rings, Med., 3B00QGD . . 19.99  
**#100-013-144AT** 30mm Hunter Rings, High, 3B00MJP . . 19.99  
**#100-013-145AT** 1" Hunter Rings, Low, 3B00PCG . . . . . 19.99  
**#100-013-146AT** 1" Hunter Rings, Med., 3B00CLP . . . . . 19.99  
**#100-013-147AT** 1" Hunter Rings, High, 3B00PUP . . . . . 19.99

## WARNE RUGER® CARBINE BASE



Easily Mount Electronic  
Sights On Ruger Carbines

Convert Ruger PC9, PC40, Ranch Rifle and Mini-30 to Weaver-style mount. Provides mounting for Holosight®, Dot sights and scopes. Attaches directly to the Ruger ring cuts in the receiver, no gunsmithing required.    
**SPECS:** Aluminum, matte black. 4.75" (12cm) long.  
**#947-010-000AT** Carbine Base, 7D36H38 . . . . . \$ 42.92

**WARNE MAGNUM SPECIAL APPLICATION MAXIMA RINGS**



Rugged Steel, Close-Tolerance Dovetails For Secure Mounting

Vertically split rings, precision-machined from steel barstock, hold large objective, heavy scopes firmly against recoil. Finished to exacting tolerances so the scope returns to zero, even after repeated dismounting and remounting.

Permanent mount (Perm) uses two socket screws to solidly lock rings to base. Quick detach (QD), double lever rings clamp quickly and tightly; dismount instantly when you lift the lever. Levers can be repositioned so both rest at the same angle. Ultra High rings give correct height for flattop AR-15 and H&K SL7 rifle.

STOCK #	DIA./HEIGHT	TYPE	PRICE
#947-000-003AT	1"/X-High	Perm	7D54M70 \$ 61.62
#947-000-004AT	1"/X-High	QD	7D83L52 \$ 93.92
#947-000-005AT	1"/Ultra High	QD	7D83J52 \$ 93.92
#947-000-008AT	30mm/X-High	Perm	7D54M71 \$ 61.62
#947-000-009AT	30mm/X-High	QD	7D98M17 \$ 110.07
#947-000-010AT	30mm/Ultra High	QD	7D98B17 \$ 110.07

**WARNE MAXIMA RINGS**

Strong, All-Steel With Adjustable Levers; Fit Weaver-Style Bases



Give any gun equipped with Weaver-style bases the good looks and quick-detach/return-to-zero advantages of Warne rings. Just two turns let you tip the ring off the base. Levers can be easily repositioned so both rest at the same angle.

SPECS: Steel, powder-coated black or nickel plated. Available in polished black (Reg.), Matte black, or matte Silver finish. Height measured from top of base to inside bottom of ring. Available in Low, .250" (6.35mm), Medium, .375" (9.5mm), or High, .525" (13.3mm).

**1" MAXIMA STEEL ADJUSTABLE LEVER RINGS**

STK# LOW	STK# MED	STK# HIGH	FINISH
#947-523-000AT	#947-523-100AT	#947-523-200AT	Reg.
#947-623-000AT	#947-623-100AT	#947-623-200AT	Matte
#947-523-001AT	#947-523-101AT	NA	Silver

— Advise # — 1" Steel, Lever, Reg. or Matte, 7D58E41... \$ 72.67  
 — Advise # — 1" Steel, Lever, Silver, 7D62A81... 72.67

**30MM MAXIMA STEEL ADJUSTABLE LEVER RINGS**

STK# LOW	STK# MED	STK# HIGH	FINISH
#947-630-000AT	#947-630-100AT	#947-630-200AT	Matte
NA	#947-530-100AT	NA	Reg.
NA	#947-530-101AT	NA	Silver

— Advise # — 30mm Steel, Lever, Reg. or Matte, 7D72F49... \$ 84.57  
 — Advise # — 30mm Steel, Lever, Silver, 7D78I54... 90.52

**34mm MAXIMA STEEL ADJUSTABLE LEVER RINGS**

STK# LOW	STK# MED	STK# HIGH	FINISH
#947-000-256AT	#947-000-257AT	#947-000-258AT	Matte

— Advise # — 34mm Steel, Lever, Matte, 7D83E82... \$ 97.74

**WARNE MAXIMA TPA RINGS**



Rock Solid Mounting; Smooth, Snag-Free Style

Two, socket-head cap screws positively clamp these vertical-split steel rings to any Weaver-style base. Gives a nicely finished look. Hefty steel recoil lug prevents shifting and loss of zero.

Choice of three finishes: Gloss Black (GB), Matte Black (MB), or Silver (SIL). Height measured from top of base to inside bottom of ring.

STOCK #	HEIGHT	FINISH	PRICE
<b>1" MAXIMA TPA RINGS</b>			
#947-005-111AT	Low (.250")	GB	7D30F94 \$ 42.49
#947-005-112AT	Low (.250")	MB	7D30H58 \$ 36.12
#947-005-113AT	Low (.250")	SIL	7D36I13 \$ 42.49
#947-005-121AT	Medium (.375")	GB	7D30I97 \$ 42.49
#947-005-122AT	Medium (.375")	MB	7D30C58 \$ 36.12
#947-005-123AT	Medium (.375")	SIL	7D36G13 \$ 42.49
#947-005-131AT	High (.525")	GB	7D30H94 \$ 42.49
#947-005-132AT	High (.525")	MB	7D29Q19 \$ 36.12
#947-005-133AT	High (.525")	SIL	7D36L13 \$ 42.49

**30MM MAXIMA TPA RINGS**

#947-005-311AT	Low (.250")	GB	7D41J78 \$ 53.97
#947-005-312AT	Low (.250")	MB	7D41G20 \$ 48.02
#947-000-295AT	Low (.250")	SIL	7D43A83 \$ 53.97
#947-000-296AT	Medium (.375")	GB	7D40H50 \$ 53.97
#947-005-322AT	Medium (.375")	MB	7D41K20 \$ 48.02
#947-000-297AT	Medium (.375")	SIL	7D44D76 \$ 53.97
#947-000-298AT	High (.525")	gb	7D40D50 \$ 53.97
#947-005-332AT	High (.525")	MB	7D41C20 \$ 48.02
#947-005-333AT	High (.525")	SIL	7D45H18 \$ 53.97

**34MM MAXIMA TPA RINGS**

#947-000-300AT	Low (.250")	GB	7D52G28 \$ 73.52
#947-000-259AT	Low (.250")	MB	7D54D23 \$ 63.32
#947-000-301AT	Low (.250")	SIL	7D56I43 \$ 73.52
#947-000-302AT	Medium (.375")	GB	7D52P28 \$ 73.52
#947-000-260AT	Medium (.375")	MB	7D54L23 \$ 63.32
#947-000-303AT	Medium (.375")	SIL	7D58L22 \$ 73.52
#947-000-304AT	High (.525")	GB	7D52D28 \$ 73.52
#947-000-261AT	High (.525")	MB	7D54C26 \$ 63.32
#947-000-305AT	High (.525")	SIL	7D56N43 \$ 73.52

**WARNE**

**EUROPEAN DOVETAIL MAXIMA RINGS**

Fits Tikka, BRNO/CZ 527 & BRNO Integral Bases



Vertically split, rings attach directly to the factory integral dovetails on Tikka, BRNO/CZ 527 and BRNO rifles. TORX screws lock scope, rings and rifle into one solid unit.

STOCK #	DIA./HEIGHT	FINISH	PRICE
<b>TIKKA-BASE PERMANENT RINGS</b>			
#947-000-035AT	1"/Med	Matte	7D41R98 \$ 50.99
#947-000-036AT	1"/High	Matte	7D41C98 \$ 50.99
#947-000-038AT	30mm/High	Matte	7D45L29 \$ 52.69

STOCK #	DIA./HEIGHT	FINISH	PRICE
<b>16MM BRNO/CZ-BASE PERMANENT RINGS</b>			
#947-000-114AT	1"/Med	Matte	7D44N06 \$ 50.99
#947-000-115AT	1"/High	Matte	7D43N55 \$ 50.99
#947-000-117AT	30mm/Med	Matte	7D44Q87 \$ 52.69
#947-000-118AT	30mm/High	Matte	7D40A94 \$ 52.69

**WARNE**

**MAXIMA RUGER®-BASE RINGS**



Permanent Mount, Smooth Profile Or Quickly Removable QD

Vertically split rings mount directly to the factory integral bases on Ruger revolvers, bolt actions, single shots and the Mini's. Four TORX head screws solidly lock rings to scope and base. Solid stainless steel lug provides improved strength; won't deform under heavy recoil.

SPECS: MIM Steel. Powder coat, matte black finish. Heights measured from top of base to inside bottom of ring. Sold per set (front and rear) only.

STOCK #	DIAMETER	FINISH	HEIGHT	PRICE
<b>RUGER-BASE PERMANENT RINGS NO.1, NO.3, 77/22®, MINI-14® &amp; MINI-THIRTY®, REDHAWK®</b>				
#947-000-019AT	1"	Mat	Med - .460"	7D42E05 \$ 50.99
#947-000-021AT	1"	Mat	High - .585"	7D42C05 \$ 50.99

STOCK #	DIAMETER	FINISH	HEIGHT	PRICE
<b>RUGER-BASE PERMANENT RINGS M77® &amp; M77 MARK II, BLACKHAWK® HUNTER, SUPER REDHAWK</b>				
#947-000-025AT	1"	Mat	Med - .460"	7D42K05 \$ 50.99
#947-000-027AT	1"	Mat	High - .585"	7D42P05 \$ 50.99

MAXIMA RUGER-BASE QD RINGS - Adjustable lever rings mount to factory integral bases. Provides true, quick-detach capability. Levers may be aligned after tightening. Four, TORX head screws solidly lock rings to scope.



SPECS: MIM Steel. Powder coat, Gloss black (Reg) or Matte black (Mat) in 1" (25.4mm) dia. only. Heights measured from top of base to inside bottom of ring. Medium: .460" (11.7mm). High: .585" (14.9mm). Sold per set (front and rear) only.

STOCK #	DIA./HEIGHT	FINISH	PRICE
<b>RUGER-BASE QD RINGS NO.1, NO.3, 77/22, MINI-14 &amp; MINI-THIRTY, REDHAWK</b>			
#947-000-049AT	1"/Med	Reg	7D82N82 \$ 96.04
#947-000-050AT	1"/Med	Mat	7D80F38 \$ 90.09
#947-000-052AT	1"/High	Mat	7D80B38 \$ 90.09

STOCK #	DIA./HEIGHT	FINISH	PRICE
<b>RUGER-BASE QD RINGS FOR M77 &amp; M77 MARK II, SUPER REDHAWK</b>			
#947-000-055AT	1"/Med	Reg	7D82L82 \$ 96.04
#947-000-056AT	1"/Med	Mat	7D80J38 \$ 90.09

**WEAVER**

**TOP MOUNT RINGS**



Now In Stainless Finish, Too!

Heights: Low and Medium for scopes w/objective diameters to approximately 1.75" (44.45mm). High for objectives above 1.75". Extra High for scopes with objectives up to 60mm.

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-490-001AT	Low	Satin	1"	5E25B87 \$ 27.99
#955-490-003AT	Low	Matte	1"	5E25D87 \$ 27.99
#955-490-002AT	Low	Stainless	1"	5E38E01 \$ 39.99
#955-490-201AT	Med.	Satin	1"	5E25H87 \$ 27.99
#955-490-203AT	Med.	Matte	1"	5E25E87 \$ 27.99
#955-490-111AT	Med.	Stainless	1"	5E38N01 \$ 39.99
#955-490-301AT	High	Satin	1"	5E25M87 \$ 27.99
#955-490-303AT	High	Matte	1"	5E25F87 \$ 27.99
#955-490-302AT	High	Stainless	1"	5E38I01 \$ 39.99
#955-490-401AT	X-High	Satin	1"	5E25L87 \$ 27.99
#955-490-403AT	X-High	Matte	1"	5E25E87 \$ 27.99
#955-491-210AT	Low	Matte	30mm	5E26N64 \$ 28.99
#955-491-200AT	High	Matte	30mm	5E26H64 \$ 28.99

**TOP MOUNT EXTENSION RINGS**

Extension Top Mount Rings, 1" and 30mm diameter. Moves eye relief 3/4", forward or backward. Sold by the pair, 1 standard and 1 extension ring or "Dual" style with two extension rings.



STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-490-500AT	High	Satin	1"	5E31E01 \$ 33.99
#955-490-503AT	High	Matte	1"	5E31L01 \$ 33.99
#955-490-610AT	Hi-Dual	Satin	1"	5E33A25 \$ 35.99
#955-490-450AT	Hi-Dual	Matte	1"	5E33M25 \$ 35.99
#955-000-079AT	High	Matte	30mm	5E37A24 \$ 39.99

**WEAVER**

**TACTICAL SCOPE RINGS**

For Ultra-Secure Mounting Of Large-Objective Scopes



Oversized rings provide extra contact area for ultra-secure mounting of large optics on hard-recoiling, long-range rifles such as sniper rifles. Fits all Weaver-style bases. Six no-strip, no-slip Torx® screws hold down the ring cap to ensure the scope keeps its position even under heavy recoil. Oversize hex nuts allow quick removal or attachment of optics in dynamic situations.

#955-000-138AT	1" Tactical Rings, High,	5E38P21... \$ 39.99
#955-000-139AT	1" Tactical Rings, Extra-High,	5E38Q21... 39.99
#955-000-140AT	30mm Tactical Rings, High,	5E38L21... 39.99



## WEAVER QUAD LOCK RINGS

Four Caps Give Double The Holding Power

Two caps per base provide twice the clamping power. 210° coverage provides even clamping pressure that pulls scope into base, prevents scope from rotating when tightening caps. Aluminum construction keeps weight to a minimum. **SPECS:** Aluminum, gloss black, matte black, or natural silver finish. Height from top of base to bottom of ring: Medium - .160" (4mm). High - .328" (8.3mm). Standard and Extension (Ext) rings fit Weaver-style bases. Extension sets include one standard ring and one extension ring. Others have two standard rings. **Tip-Off** rings fit 1/8" grooved .22 rimfire receivers.



STOCK #	STYLE	FINISH	PRICE
#955-000-001AT	1" Medium	Gloss	5E14L16 \$ 15.99
#955-000-002AT	1" High	Gloss	5E14M16 \$ 15.99
#955-000-003AT	1" High Ext.	Gloss	5E15F76 \$ 17.99
#955-000-004AT	1" Medium	Matte	5E14E16 \$ 15.99
#955-000-005AT	1" High	Matte	5E14P16 \$ 15.99
#955-000-006AT	1" High Ext.	Matte	5E15I76 \$ 17.99
#955-000-104AT	1" Medium	Silver	5E14N16 \$ 15.99
#955-000-105AT	1" High	Silver	5E14I16 \$ 15.99
#955-000-106AT	1" High Ext.	Silver	5E15M76 \$ 17.99
#955-000-102AT	1" Tip Off	Matte	5E16G72 \$ 18.99

## WEAVER SEE-THRU MOUNT RINGS



For Weaver Bases

Extra wide, oval design for instant use of either iron sights or scope. Standard **See-Thru** or **Extension** style that adds approximately 1/4" (19mm) eye relief adjustment. Fit Weaver Top Mount Bases. Excellent for mounting large objective diameter scopes, too.

**SPECS:** Steel, satin blue (SB) or matte blue (MB) finish. For 1" (2.5cm) scopes. Sold in pairs.

#955-495-100AT	See-Thru Rings (SB), 5E26K19	\$ 28.99
#955-495-230AT	See-Thru Rings (MB), 5E26H64	28.99
#955-495-500AT	Ext. See-Thru Rings (SB), 5E30J52	33.99
#955-495-101AT	Ext. See-Thru Rings (MB), 5E32K94	35.99
#955-495-250AT	Dual Extension See-Thru Rings (MB), 5E36K05	39.99

## WEAVER .22 RIMFIRE / AIRGUN TIP-OFF® MOUNT

Easy-To-Install Rimfire/Airgun Rings With Built-In Bases

These 1" rings have integral bases for use on .22 rimfire rifles and airguns with 3/8" (9.5mm) dovetail receiver grooves. Separate bases not required - it's all right here! Neat, symmetrical caps with two screws on each side. **SPECS:** Base - Aluminum, anodized, black. Cap - Steel, black finish. Accepts 1" (2.5cm) scopes. Sold in pairs.

#955-494-101AT Pro-View Tip-Off Mount, 5E15G30 . . . \$ 16.99



## WEAVER GRAND SLAM BASES

Solid Steel, Two-Piece Bases For Rifles, Hunting Handguns

High-strength, steel bases to fit a wide range of modern and older rifles, plus some long range handguns. Sold each; order front and rear base. (F) front, (R) rear **EXTENSION BASES** provide added flexibility for mounting all types of scopes. **SPECS:** Steel, blue, matte finish. Fits Weaver Grand Slam, Top Mount, Tip-Off and See-Thru Mount Rings. Includes screws.



RIFLE MODEL	STK# REAR	STK# FRONT
ANSCHUTZ 54, 54MS, 64, 64MS, 164, 1413, 1422, 1424, 1430, 1432, 1433, 1434, 1522, 1530, 1532, 1534	#955-000-040AT(S91)	#955-000-040AT(S91)
1568	#955-000-033AT(S61)	#955-000-026AT(S46)
BROWNING A-Bolt, A-Bolt 22	#955-000-027AT(S47)	#955-000-027AT(S47)
BAR, BAR II, Mark II, semi-auto	#955-000-029AT(S54)	#955-000-029AT(S54)
BBR long & short action	#955-000-027AT(S47)	#955-000-026AT(S46)
BSA Monarch med./L action	#955-000-024AT(S36)	#955-000-023AT(S35)
Monarch med./L action F/ext.	#955-000-024AT(S36)	NA
CHURCHILL Highlander	#955-000-024AT(S36)	#955-000-023AT(S35)
Highlander F/ext.	#955-000-024AT(S36)	NA
CIL 950, 950C	#955-000-033AT(S61)	#955-000-026AT(S46)
950, 950C F/extension	#955-000-033AT(S61)	#955-000-081AT(S402)
972-C	#955-000-025AT(S45)	#955-000-026AT(S46)
972-C F/extension	#955-000-025AT(S45)	#955-000-081AT(S402)
COLT Coltsman LA round receiver	#955-000-029AT(S54)	#955-000-029AT(S54)
Sauer	#955-000-023AT(S35)	#955-000-023AT(S35)
57	#955-000-025AT(S45)	#955-000-026AT(S46)
57 F/extension	#955-000-025AT(S45)	#955-000-081AT(S402)
COOEY 71	#955-000-027AT(S47)	#955-000-026AT(S46)
ENFIELD receiver cut down like: Remington 721	#955-000-024AT(S36)	#955-000-023AT(S35)
Remington 721, F/extension	#955-000-024AT(S36)	NA
Winchester 70	#955-000-027AT(S47)	#955-000-026AT(S46)
H&R 300, 301, 330, 370 pre-1973	#955-000-025AT(S45)	#955-000-026AT(S46)
300, 301 LA pre-1973 F/ext.	#955-000-025AT(S45)	#955-000-081AT(S402)
300, 301 long action post-1973	#955-000-029AT(S54)	#955-000-026AT(S46)
300, 301 LA post-1973 F/ext.	#955-000-029AT(S54)	#955-000-081AT(S402)
HERTER'S U-9 round receiver	#955-000-024AT(S36)	#955-000-023AT(S35)
U-9 round receiver, F/ext.	#955-000-024AT(S36)	NA
J-9 & FN action	#955-000-025AT(S45)	#955-000-026AT(S46)
J-9 & FN action, F/extension	#955-000-025AT(S45)	#955-000-081AT(S402)
HIGH STANDARD Hi-Power	#955-000-030AT(S55)	#955-000-026AT(S46)
HOWA 1500	#955-000-024AT(S36)	#955-000-023AT(S35)
1500, F/extension	#955-000-024AT(S36)	NA
ITHACA LSA-55, LSA-65	#955-000-033AT(S61)	#955-000-033AT(S61)
KNIGHT MK 85, BK-92, T-Bolt	#955-000-033AT(S61)	#955-000-033AT(S61)
LK-93, Wolverine, Legend, Disc	#955-000-025AT(S45)	#955-000-025AT(S45)

RIFLE MODEL	STK# REAR	STK# FRONT
MARLIN 9, 36, 45, 62, 93, 336, 375, 444, 1893, 1894, 1895, Camp Carbine, 922M, 989, Glenfield 30	#955-000-072AT(S466)	#955-000-072AT(S466)
MR7	#955-000-027AT(S47)	#955-000-026AT(S46)
455	#955-000-025AT(S45)	#955-000-026AT(S46)
MAUSER FN, HVA, Model 98 large ring	#955-000-025AT(S45)	#955-000-026AT(S46)
Model 98 F/ext.	#955-000-025AT(S45)	#955-000-081AT(S402)
HVA, Swedish 96 small ring	#955-000-030AT(S55)	#955-000-026AT(S46)
Model 95, 96 F/ext.	#955-000-030AT(S55)	#955-000-081AT(S402)
MOSSBERG 680, 695, 800	#955-000-030AT(S55)	NA
MOSSBERG 680, 695, 800	NA	#955-000-030AT(S55)
1500, 1550, 1700	#955-000-024AT(S36)	#955-000-023AT(S35)
1500, 1550, 1700 F/ext.	#955-000-024AT(S36)	NA
MUSGRAVE Mark I, Mark II	#955-000-029AT(S54)	#955-000-026AT(S46)
Mark I, II F/extension	#955-000-029AT(S54)	#955-000-081AT(S402)
Mark III, Mark IV	#955-000-025AT(S45)	#955-000-026AT(S46)
Mark III, IV F/extension	#955-000-025AT(S45)	#955-000-081AT(S402)
NAVY ARMS Country Boy	#955-000-026AT(S46)	#955-000-026AT(S46)
PARKER HALE 1000, 1000C, 1100, 1200, 1700	#955-000-025AT(S45)	#955-000-026AT(S46)
RAPTOR ARMS 700 action	#955-000-024AT(S36)	#955-000-023AT(S35)
700 action F/ext.	#955-000-024AT(S36)	NA
REMINGTON 700 long action, 78, 40-XL, 721, 725	#955-000-024AT(S36)	#955-000-023AT(S35)
700 short action, 700 ML	#955-000-024AT(S36)	#955-000-023AT(S35)
700 LA/SA, 700 ML F/ext.	#955-000-024AT(S36)	NA
SAKO Whitetail Hunter	#955-000-033AT(S61)	#955-000-033AT(S61)
SAUER 200	#955-000-023AT(S35)	#955-000-023AT(S35)
SAVAGE 110, 116, 10, 11, 12	#955-000-033AT(S61)	#955-000-026AT(S46)
10 & 110 series F/extension	#955-000-033AT(S61)	#955-000-081AT(S402)
SEARS 50, 51 FN action	#955-000-025AT(S45)	#955-000-026AT(S46)
51L	NA	#955-000-030AT(S55)
51L	NA	#955-000-026AT(S46)
53	#955-000-027AT(S47)	#955-000-026AT(S46)
SHILEN flat top receiver	#955-000-033AT(S61)	#955-000-033AT(S61)
round receiver	#955-000-023AT(S35)	#955-000-023AT(S35)
SMITH & WESSON	#955-000-030AT(S55)	#955-000-026AT(S46)
Mauser action 1500, 1600	#955-000-024AT(S36)	#955-000-023AT(S35)
1700, 1500, 1600, 1700 F/ext.	#955-000-024AT(S36)	NA
SPRINGFIELD '03	#955-000-029AT(S54)	#955-000-030AT(S55)
STEVENS 110E	#955-000-033AT(S61)	#955-000-026AT(S46)
TIKKA flat receiver	#955-000-033AT(S61)	#955-000-033AT(S61)
VOERE 2150, 2165, Mauser action	#955-000-025AT(S45)	#955-000-026AT(S46)
Mauser action F/extension	#955-000-025AT(S45)	#955-000-081AT(S402)
WEATHERBY Mark V, Vanguard	#955-000-024AT(S36)	#955-000-023AT(S35)
Mark V, Vanguard F/ext	#955-000-024AT(S36)	NA
Mark V 22-250, 224, 30-06	#955-000-024AT(S36)	#955-000-026AT(S46)
WESTERNFIELD 770, 775, 780	#955-000-030AT(S55)	#955-000-030AT(S55)
WINCHESTER 70 long and short action, H&H mags above #1,896,476	#955-000-027AT(S47)	#955-000-026AT(S46)
70 long and short action, H&H mags above #1,896,476; 70 Target, H&H mags up to #1,896,476	NA	#955-000-026AT(S46)
52 hole spacing same	#955-000-026AT(S46)	#955-000-026AT(S46)
670, 770	#955-000-027AT(S47)	#955-000-026AT(S46)

— Advise # — Grand Slam Base, 5E1181 . . . . . \$ 12.99

## WEAVER SIDE MOUNT 1" RINGS & BASE

For Bolt & Ejection Clearance

One-piece rings and sub-base mount scope to side of receiver to provide clearance for bolt handles, easier loading and ejection. Long and Short ring mounts give correct spacing for compact or large scopes. **Bases accept Weaver Side Mount rings ONLY (listed below).** **SPECS:** Rings: Sub-base, aluminum, anodized, black; steel ring cap, black. Distance between rings - Long 3.7" (9.3cm), Short 1.8" (4.7cm). Base: Aluminum, black, anodized finish. Replacement Thumb Screws - Sold per pair.



#955-010-103AT 3B Side Mount Base, 5E17A18 . . . . . \$ 18.99  
#955-493-103AT 1" Short Side Mnt Ring, 5E33L24 . . . . . 35.99  
#955-493-303AT 1" Long Side Mnt Ring, 5E38Q07 . . . . . 39.99

RIFLE MODEL	STOCK #
ANSCHUTZ 1568	#955-010-001AT (1)
CARCANO military action	#955-010-001AT (1)
CIL 830 & 950, 950C	#955-010-001AT (1)
COOEY 60, 600	#955-010-002AT (2)
Model 71	#955-010-001AT (1)
ENFIELD P 14/17 receiver cut like Remington 30	#955-010-001AT (1)
H&R Models 65, 165, 150, 151, 250, 251, 264, 265, 365, 450, 550, 755, 765, 852	#955-010-002AT (2)
HIGH STANDARD Mauser action	#955-010-001AT (1)
JAPANESE Arisaka 6.5mm & 7.7mm	#955-010-001AT (1)
KRAG	#955-010-002AT (2)
MARLIN A1, 50, 39A round barrel, 80, 81, 88, 89, 98	#955-010-002AT (2)
Model 512 Slugmaster, 590	#955-010-010AT (10M)
MAUSER Models ZB, HVA Husqvarna w/rec. ring 1.3" dia.	#955-010-001AT (1)
MOSSBERG 25, 26, 35, 40, 42, 43, 44, 45, 46, 46A, 46B, 46M, 140, 142, 144, 146, 468T	#955-010-002AT (2)
REMINGTON 30, 700, 40-X, 600, 660, 721, 722 700ML LA/SA	#955-010-001AT (1)
Mod. 10, 11, 12, 12A, 25, 33, 34, 41, 121, 341, 513S, 513T, 514	#955-010-002AT (2)
SAVAGE 20, 110, 111, 112, 116, 340, 342, 840, 842	#955-010-001AT (1)
Models 3, 4, 5, 6, 7, 19, 23, 40, 45, 219	#955-010-002AT (2)
SCHULTZ & LARSEN	#955-010-001AT (1)
SEARS Models 51L, 53	#955-010-001AT (1)
Model 94 post-'64	#955-010-103AT (3B)
SMITH & WESSON Mauser actions	#955-010-001AT (1)
SPRINGFIELD '03	#955-010-001AT (1)
STEVENS 110E, 325, 322	#955-010-001AT (1)
Models 26, 53, 56, 57, 66, 76, 85, 416, 417, 418, 762, 872	#955-010-002AT (2)
STEVENS-SPRINGFIELD 840	#955-010-001AT (1)
Models 83, 872	#955-010-002AT (2)
WINCHESTER 54, 70 LA/SA, 670, 770	#955-010-001AT (1)
Model 94 post-'64	#955-010-103AT (3B)
Models 03, 47, 52, 57, 61, 63, 69, 69A, 72, 74, 75, 77	#955-010-002AT (2)
Model 42 pump shotgun	#955-010-002AT (2)
ZB 22	#955-010-002AT (2)

— Advise # — 1, 2, 10M Base, 5E16D13 . . . . . \$ 17.99

## WEAVER TOP MOUNT BASES



## One- &amp; Two-Piece Bases For Rifles, Shotguns, Handguns

Lightweight aluminum bases fit a wide range of modern and older rifles, plus shotguns and long range handguns. Sold each; order front and rear base. One piece bases and base pair sets available for some models. Base pair sets are marked with \* or \*\*. **SPECS:** Aluminum, polished blue finish except Matte (M), Silver (S). Extension bases: Front (F), Rear (R). Fits Top Mount and See-Thru Mount Rings.

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>ANSCHUTZ</b>			
Mark 12	#955-010-016AT (16)	#955-010-016AT (16)	NA
54, 54MS, 64, 64ms, 164, 1413, 1422, 1424, 1430, 1432, 1433, 1434, 1522, 1530, 1532, 1534	#955-010-091AT (91)	#955-010-091AT (91)	NA
153 Deluxe	#955-010-019AT (19)	#955-010-019AT (19)	NA
1568	#955-010-061AT (61)	#955-010-146AT (46M)	NA
	#955-010-046AT (46)	NA	NA
	#955-010-161AT (61M)	NA	NA
<b>AUSTIN &amp; HALLECK</b>			
420 (inline M/L)	#955-010-085AT (85)	#955-010-085AT (85)	NA
<b>BENELLI</b>			
Super Blk Eagle, S. Blk Eagle II	NA	NA	#955-010-093AT (93)
Nova	NA	NA	#955-010-004AT (423M)
<b>BROWNING</b>			
A-Bolt after 1996, except WSSM	#955-010-047AT (47)	#955-010-084AT (84)	NA
A-Bolt, A-Bolt 22 before 1996	#955-010-047AT (47)	#955-010-047AT (47)	NA
	#955-010-147AT (47M)	#955-010-147AT (47M)	NA
A-Bolt WSSM, 204 & 223	#955-000-092AT (427)	#955-010-047AT (47)	NA
A-Bolt European model	#955-010-085AT (85)	#955-010-085AT (85)	NA
A-Bolt Shotgun	#955-010-147AT (47M)	#955-010-419AT (419M)	NA
BBR FN Mauser action	#955-010-045AT (45)	#955-010-046AT (46)	NA
	NA	#955-000-121AT (45M, 46M)*	NA
BBR F/extension	#955-010-045AT (45)	#955-010-402AT (402)	NA
BBR long & short action	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
BBR F/extension	#955-010-047AT (47)	#955-010-401AT (402M)	NA
	#955-010-147AT (47M)	NA	NA
BAR, BAR II, Mark II, semi-auto	#955-010-054AT (54)	#955-010-054AT (54)	NA
	NA	#955-000-127AT (54M, 54M)*	NA
BLR	#955-010-025AT (25)	#955-010-025AT (25)	NA
BLR flat top receiver	#955-010-028AT (28)	#955-010-028AT (28)	NA
T-Bolt (new model)	#955-010-015AT (15)	#955-010-015AT (15)	NA
1885 Hi Wall octagon barrel	NA	#955-010-011AT (11)	NA
	NA	#955-010-029AT (29)	NA
22 Auto base attaches to barrel extends over receiver. Norinco clones.	NA	NA	#955-010-060AT (60A)
52	#955-010-085AT (85)	#955-010-085AT (85)	NA
<b>BSA</b>			
Monarch med/L action, F/Ext.	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA

BSA continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
Monarch, CF2 long action	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-117AT (36M, 35M)*
	#955-010-136AT (36M)	#955-010-135AT (35M)	#955-000-118AT (36S, 35S)*
Medium action one-piece base	NA	NA	#955-010-097AT (97)
Long action one-piece base	NA	NA	#955-010-098AT (98)
Other high powers	#955-010-028AT (28)	#955-010-028AT (28)	NA
<b>CHARLES DALY</b>			
Mini Mauser 98	#955-010-023AT (23)	#955-011-071AT (71A)	NA
	#955-010-055AT (55)	#955-010-035AT (35)	NA
<b>CIL</b>			
871	#955-010-062AT (62)	NA	NA
900	#955-010-019AT (19)	#955-010-019AT (19)	NA
950, 950C	#955-010-061AT (61)	#955-010-046AT (46)	#955-000-122AT (61M, 46M)*
	#955-010-161AT (61M)	#955-010-146AT (46M)	NA
972-C	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
<b>COLT</b>			
Coltsman SA round receiver	#955-010-025AT (25)	#955-010-025AT (25)	NA
Coltsman LA round receiver	#955-010-054AT (54)	#955-010-054AT (54)	#955-000-127AT (54M, 54M)*
Sauer	#955-010-035AT (35)	#955-010-035AT (35)	NA
	#955-010-135AT (35M)	#955-010-135AT (35M)	NA
Sauer, F/R/extension	#955-010-040AT (40A)	#955-010-040AT (40A)	NA
	#955-010-041AT (40A-M)	#955-010-041AT (40A-M)	NA
57	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
<b>COEY</b>			
71	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
<b>CVA</b>			
Round Receiver	#955-010-418AT (418M)	#955-010-418AT (418M)	NA
<b>ENFIELD receiver cut down like:</b>			
Remington 30	#955-010-011AT (11)	#955-010-011AT (11)	NA
Remington 721	#955-010-036AT (36)	#955-010-035AT (35)	NA
	#955-010-136AT (36M)	#955-010-135AT (35M)	NA
Remington 721 F/Ext.	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
Winchester 70	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
Winchester 70 F/Ext.	#955-010-047AT (47)	#955-010-402AT (402)	NA
	#955-010-147AT (47M)	#955-010-401AT (402M)	NA
<b>GARCIA</b>			
73	NA	NA	#955-010-053AT (53)
<b>H&amp;R</b>			
65, 165, 150, 151 semi-auto	#955-010-018AT (18)	#955-010-018AT (18)	NA
176	NA	NA	#955-010-083AT (83)
250, 251, 264, 265, 365, 450, 550	#955-010-018AT (18)	#955-010-016AT (16)	NA
300, 301, 330, 370 before 1973	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
300, 301 pre 1973, F/extension	#955-010-045AT (45)	#955-010-402AT (402)	NA
300, 301 short action post 1973	#955-010-083AT (83)	#955-010-084AT (84)	NA
	#955-010-054AT (54)	#955-010-046AT (46)	NA
300, 301 post 1973, F/extension	#955-010-054AT (54)	#955-010-402AT (402)	NA
	#955-010-011AT (11)	#955-010-035AT (35)	NA
317, 322, F/extension	#955-010-011AT (11)	#955-010-040AT (40A)	NA
360, 361	NA	NA	#955-010-081AT (81)

H&amp;R continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
Topper 30, 22 Jet, 158 before 1973	NA	NA	#955-010-060AT (60A)
Topper 155, 157, 158C after 1973	NA	NA	#955-010-082AT (82)
700	NA	NA	#955-010-087AT (87)
755, 765, 852, 865	#955-010-017AT (17)	#955-010-021AT (21)	NA
800	#955-010-012AT (12)	#955-010-012AT (12)	NA
980 Ultra, 232C 10 Gauge	#955-010-019AT (19)	#955-010-019AT (19)	NA
<b>HENRY</b>			
H009 (130-30) & H010 (45-70)	NA	NA	#955-010-063AT (63B)
<b>HERTERS</b>			
US B9 dovetail action	#955-010-028AT (28)	#955-010-028AT (28)	NA
U-9 round receiver	#955-010-036AT (36)	#955-010-035AT (35)	NA
	#955-010-136AT (36M)	#955-010-135AT (35M)	NA
J-9 FN action	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
<b>HIGH STANDARD</b>			
High-Power	#955-010-055AT (55)	#955-010-046AT (46)	NA
High-Power F/extension	#955-010-055AT (55)	#955-010-040AT (40A)	NA
<b>HOWA</b>			
1500	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-117AT (36M, 35M)*
	#955-010-136AT (36M)	#955-010-135AT (35M)	#955-000-118AT (36S, 35S)*
1500, F/extension	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
<b>ITHACA</b>			
LSA-55, LSA-65	#955-010-061AT (61)	#955-010-061AT (61)	NA
	#955-010-161AT (61M)	#955-010-161AT (61M)	NA
<b>JAPANESE</b>			
Arisaka 6.5mm, 7.7mm	NA	NA	#955-010-070AT (70)
<b>KIMBER</b>			
Win 70 style	#955-010-049AT (49A)	#955-010-046AT (46)	NA
82	NA	NA	#955-010-083AT (83)
82C	#955-010-054AT (54)	#955-010-054AT (54)	NA
<b>KNIGHT</b>			
MK 65 Muzzle-loader	#955-010-061AT (61)	#955-010-061AT (61)	NA
	#955-010-161AT (61M)	#955-010-161AT (61M)	NA
LK-93, Wolverine, Legend	#955-010-045AT (45)	#955-010-045AT (45)	NA
<b>LONE EAGLE</b>			
SSP 91 Pistol	#955-010-016AT (16)	#955-010-016AT (16)	NA
<b>MARLIN</b>			
A-1, 50	NA	NA	#955-010-063AT (63B)
9, 36, 45, 62, 93, 336, 375, 444, 1893, 1894, 1895, Camp 9 Carbine, 922M, 989, Glenfield 30	NA	NA	#955-000-091AT (63B-S)
	NA	NA	#955-000-128AT (336M, 336M)*
MR7	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
MR-7 F/extension	#955-010-047AT (47)	#955-010-402AT (402)	NA
	#955-010-147AT (47M)	#955-010-401AT (402M)	NA
39A	#955-010-090AT (90)	#955-010-016AT (16)	NA
	#955-010-029AT (29)	NA	NA
455	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
455, F/extension	#955-010-045AT (45)	#955-010-402AT (402)	NA
57 Magnum	NA	NA	#955-010-058AT (58)
88, 89, 98, 917	#955-010-018AT (18)	#955-010-018AT (18)	NA
80, 81, 980	#955-010-012AT (12)	#955-010-012AT (12)	NA

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>MAUSER</b>			
Bauer 3000, 4000	#955-010-068AT (68)	#955-010-046AT (46)	NA
Bauer F/Ext	#955-010-068AT (68)	#955-010-402AT (402)	NA
FN, HVA, Model 95, 98 large ring	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
FN, HVA, 95, 98 large ring F/Ext	#955-010-045AT (45)	#955-010-402AT (402)	NA
Swedish 96, HVA, small ring	#955-010-055AT (55)	#955-010-046AT (46)	NA
Swede 96, HVA, small ring F/Ext	#955-010-055AT (55)	NA	NA
Mark X	#955-010-055AT (55)	#955-010-020AT (20A)	NA
Mini-Mark X	#955-010-023AT (23)	#955-011-071AT (71A)	NA
<b>MOSSBERG</b>			
25, 26, 42, 46M, 140, 142, 146, also 45, 46 w/ 3/4" dia. bbls.	#955-010-012AT (12)	NA	NA
25, 26, 42, 46M, 140, 142, 146, also 45, 46 w/ 3/4" dia. bbls.	NA	#955-010-013AT (13)	NA
40	#955-010-016AT (16)	#955-010-021AT (21)	NA
43, 44, 144, 468T, 35. Also models 45, 46, 46A, 468 w/ 13/16" dia. bbls.	#955-010-012AT (12)	#955-010-016AT (16)	NA
50, 51, 151, 152, 350, 352	#955-010-012AT (12)	NA	NA
43, 44, 144, 468T, 35. Also models 45, 46, 46A, 468 w/ 13/16" dia. bbls.	NA	#955-010-012AT (12)	NA
400	#955-010-020AT (20A)	#955-010-042AT (42)	NA
500A, 600 shotguns before 1997	NA	NA	#955-010-088AT (88)
500 after 1997, 835 shotguns	NA	NA	#955-000-084AT (417M) 500M**
640	NA	NA	#955-010-063AT (63B)
	NA	NA	#955-010-091AT (63B-S)
680, 695, 800	#955-010-055AT (55)	#955-010-055AT (55)	NA
810, RM7	#955-010-025AT (25)	#955-010-011AT (11)	NA
1500, 1550, 1700	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-117AT (36M, 35M)*
	#955-010-136AT (36M)	#955-010-135AT (35M)	#955-000-118AT (36S, 35S)*
1500, 1550, 1700, F/extension	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
<b>MUSGRAVE</b>			
Mark I, Mark II	#955-010-054AT (54)	#955-010-046AT (46)	NA
Mark I, II F/extension	#955-010-054AT (54)	#955-010-402AT (402)	NA
Mark III, Mark IV	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
Mark III, IV, F/extension	#955-010-045AT (45)	#955-010-402AT (402)	NA
<b>NEW ENGLAND FIREARMS</b>			
Handy Rifle	NA	NA	#955-010-045AT (45)
10 gauge shotgun	#955-010-019AT (19)	#955-010-019AT (19)	NA
<b>PARKER HALE</b>			
1000, 1000C, 1100, 1200, 1700	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
1000, 1100, 1200, 1700, F/Ext	#955-010-045AT (45)	#955-010-402AT (402)	NA

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>REMINGTON</b>			
700, 78, 40-XL, 721	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-117AT (36M, 35M)*
722, 725, 700ML, LA/SA	#955-010-136AT (36M)	#955-010-135AT (35M)	#955-000-118AT (36S, 35S)*
700, 78, 40-XL, 721, 722, 725, 700ML, LA/SA, F/extension	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
700, 78, 40-XS short action one-piece	NA	NA	#955-010-097AT (97)
788	#955-010-076AT (76)	#955-010-075AT (75)	NA
7 new model w/4-hole receiver	#955-010-006AT (421M)	#955-010-135AT (35M)	NA
7 new model F/ ext., 673	#955-010-006AT (421M)	#955-010-041AT (40A-M)	NA
7, 600, 660, XP-100 single shot (3-hole)	NA	NA	#955-010-070AT (70)
4, 6, 74, 76, 7400, 7600, 7615	NA	NA	#955-010-093AT (93)
740, 742, 760	NA	NA	#955-010-062AT (62)
	NA	NA	#955-000-129AT (602M, 601M)*
10, 11, 12, 34, 341, 510, 512, 521T	#955-010-043AT (43)	#955-010-042AT (42)	NA
12A, 121 w/ 3/4" dia. barrels	#955-010-018AT (18)	#955-010-015AT (13)	NA
Genesis Muzzle-loader	#955-010-418AT (418M)	#955-010-418AT (418M)	NA
121 w/ 13/16" dia. barrel	#955-010-018AT (18)	NA	NA
	#955-010-017AT (17)	NA	NA
14, 141	#955-010-020AT (20A)	#955-010-027AT (27)	NA
24, 241	NA	NA	#955-010-060AT (60A)
25	#955-010-018AT (18)	#955-010-021AT (21)	NA
30, 720	#955-010-011AT (11)	#955-010-011AT (11)	NA
33	#955-010-017AT (17)	#955-010-015AT (13)	NA
41	#955-010-017AT (17)	#955-010-017AT (17)	NA
513S, 513T	#955-010-043AT (43)	#955-010-044AT (44)	NA
514	#955-010-016AT (16)	#955-010-021AT (21)	NA
514 if not drilled & tapped, 550	#955-010-012AT (12)	#955-010-012AT (12)	NA
541S, 541T	#955-010-015AT (15)	#955-010-015AT (15)	NA
597	NA	NA	#955-010-414AT (414M)
	NA	NA	#955-010-424AT (414S)
Shotgun (all drilled & tapped models)	#955-000-133AT (429M)	NA	NA
<b>ROSSI</b>			
Single Shot Firearms	NA	NA	#955-010-092AT (92A)
<b>RUGER®</b>			
10/1/22*	NA	NA	#955-000-130AT (504M, 503M)*
No. 3	#955-010-085AT (85)	#955-010-086AT (86)	NA
77 round top	#955-010-079AT (79)	NA	NA
	#955-010-035AT (35)	NA	NA
44 Magnum Deer Stalker	#955-010-047AT (47)	#955-010-068AT (68)	NA
<b>SAKO</b>			
Firnwolf	NA	NA	#955-010-053AT (53)
Whitetail Hunter	#955-010-061AT (61)	#955-010-061AT (61)	NA
	#955-010-161AT (61M)	#955-010-161AT (61M)	NA
72, 75, 78	#955-010-085AT (85)	#955-010-085AT (85)	NA

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
<b>SAUER</b>			
200	#955-010-035AT (35)	#955-010-035AT (35)	NA
	#955-010-135AT (35M)	#955-010-135AT (35M)	NA
200 F/R/Extension	#955-010-040AT (40A)	#955-010-040AT (40A)	NA
	#955-010-041AT (40A-M)	#955-010-041AT (40A-M)	NA
SHR 970	#955-010-025AT (25)	#955-010-025AT (25)	NA
<b>SAVAGE</b>			
99, 189S, 1899	#955-010-014AT (14)	#955-010-019AT (19)	NA
110 through 116	NA	NA	#955-010-413AT (413)
110, 111, 116, 10,	#955-010-061AT (61)	#955-010-046AT (46)	#955-000-122AT (61M, 46M)*
11, 16	#955-010-161AT (61M)	#955-010-146AT (46M)	NA
110, 116, 10, 16	#955-010-061AT (61)	#955-010-402AT (402)	NA
F/Ext	#955-010-161AT (61M)	#955-010-401AT (402M)	NA
10-16, 110-116, w/AccuTrigger, Stevens 200	#955-010-146AT (46M)	#955-010-046AT (46)	#955-000-123AT (46M, 46M)*
	#955-012-046AT (46)	#955-010-146AT (46M)	#955-000-124AT (46S, 46S)*
3	NA	#955-012-046AT (46)	NA
3	#955-010-016AT (16)	#955-010-021AT (21)	NA
4, 5	#955-010-012AT (12)	#955-010-013AT (13)	NA
6, 7	#955-010-012AT (12)	#955-010-012AT (12)	NA
19, 23	#955-010-015AT (15)	#955-010-016AT (16)	NA
24, 24V	NA	NA	#955-010-074AT (74)
29 round barrel	#955-010-011AT (11)	#955-010-022AT (22)	NA
40, 45	#955-010-011AT (11)	#955-010-011AT (11)	NA
67	NA	NA	#955-010-093AT (93)
93	#955-010-016AT (16)	#955-010-016AT (16)	NA
170	NA	NA	#955-010-062AT (62)
219	#955-010-012AT (12)	#955-010-030AT (30)	NA
<b>SCHULTZ &amp; LARSEN</b>			
	#955-010-054AT (54)	#955-010-046AT (46)	NA
<b>SEARS</b>			
50, 51 FN Action	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
50, 51 F/Extension	#955-010-045AT (45)	#955-010-402AT (402)	NA
51L	#955-010-055AT (55)	#955-010-046AT (46)	NA
53	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
53 F/Extension	#955-010-047AT (47)	#955-010-402AT (402)	NA
	#955-010-147AT (47M)	#955-010-401AT (402M)	NA
<b>SHILEN</b>			
Flat top receiver	#955-010-061AT (61)	#955-010-061AT (61)	NA
	#955-010-161AT (61M)	#955-010-161AT (61M)	NA
Round receiver	#955-010-035AT (35)	#955-010-035AT (35)	NA
	#955-010-135AT (35M)	#955-010-135AT (35M)	NA
<b>SHOTGUN</b>			
Double & single barrel w/rib thick enough for base screws	NA	NA	#955-010-050AT (50)
<b>SMITH &amp; WESSON</b>			
Mauser Action	#955-010-055AT (55)	#955-010-046AT (46)	NA
1500, 1600, 1700	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-117AT (36M, 35M)*
	#955-010-136AT (36M)	#955-010-135AT (35M)	NA
1500, 1550, 1700	NA	NA	#955-000-118AT (36S, 35S)*
1500, 1600, 1700	#955-010-036AT (36)	#955-010-040AT (40A)	NA
F/Ext	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
<b>SPRINGFIELD</b>			
'03	#955-010-054AT (54)	#955-010-055AT (55)	NA
03-A3	#955-010-059AT (59)	#955-010-045AT (45)	NA
<b>STEVENS</b>			
26	#955-010-022AT (22)	#955-010-022AT (22)	NA
53	#955-010-016AT (16)	#955-010-021AT (21)	NA
56, 66	#955-010-012AT (12)	#955-010-013AT (13)	NA

STEVENS continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
57, 76, 417-12, 762	#955-010-012AT (12)	#955-010-012AT (12)	NA
110E	#955-010-061AT (61)	#955-010-046AT (46)	NA
	#955-010-161AT (61M)	#955-010-146AT (46M)	NA
416	#955-010-018AT (18)	#955-010-017AT (17)	NA
417	#955-010-015AT (15)	#955-010-015AT (15)	NA
418, 418-1/2	#955-010-016AT (16)	#955-010-016AT (16)	NA
<b>STEVENS-SPRINGFIELD</b>			
83	#955-010-016AT (16)	#955-010-021AT (21)	NA
85, 87, 872	#955-010-012AT (12)	#955-010-012AT (12)	NA
<b>THOMPSON CENTER</b>			
TCR rifle	NA	NA	#955-010-405AT (405)
Contender handgun & carbine	NA	NA	#955-010-092AT (92A)
	NA	NA	#955-000-090AT (92A-S)
Encore handgun & carbine	NA	NA	#955-010-410AT (410)
Omega Muzzle-loader	NA	NA	#955-010-410AT (410)
Scout rifle & pistol	NA	NA	#955-010-404AT (404)
System 1 & Blk	NA	NA	#955-010-411AT (411)
Diamond 2 per package	NA	NA	#955-010-406AT (406)
Thunderhawk, Firehawk 2 per package	NA	NA	#955-010-406AT (406)
<b>TIKKA</b>			
Flat receiver	#955-010-061AT (61)	#955-010-061AT (61)	NA
<b>TRADITIONS</b>			
Whitetail Hunter	#955-010-161AT (61M)	#955-010-161AT (61M)	NA
In-Line Buck Hunter	#955-010-075AT (75)	#955-010-075AT (75)	NA
<b>VOERE</b>			
2150, 2165, Mauser action	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
2130	#955-010-028AT (28)	#955-010-028AT (28)	NA
<b>WEATHERBY</b>			
Mark V Magnum	#955-010-034AT (424M)	#955-010-135AT (35M)	NA
Vanguard 22-250,	#955-010-036AT (36)	#955-010-035AT (35)	#955-000-118AT (36S, 35S)*
224, 30-06	#955-010-136AT (36M)	#955-010-135AT (35M)	NA
Vanguard F/extension	#955-010-036AT (36)	#955-010-040AT (40A)	NA
	#955-010-136AT (36M)	#955-010-041AT (40A-M)	NA
Others with FN Mauser actions	#955-010-045AT (45)	#955-010-046AT (46)	#955-000-121AT (45M, 46M)*
Lightweight U.S. made actions	#955-010-036AT (36)	#955-010-415AT (415)	NA
	#955-010-136AT (36M)	#955-010-416AT (415M)	NA
<b>WESTERNFIELD</b>			
730	#955-010-025AT (25)	NA	NA
	#955-010-011AT (11)	NA	NA
740	NA	NA	#955-010-063AT (63B)
	NA	NA	#955-010-091AT (63B-S)
770	#955-010-055AT (55)	#955-010-020AT (20A)	NA
775, 780	#955-010-055AT (55)	#955-010-055AT (55)	NA
<b>WINCHESTER</b>			
70 long and short action, H&H mags above #1,896,476	#955-010-047AT (47)	#955-010-146AT (46M)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	NA	NA
70 LA/SA above #1,896,476 F/ext	#955-010-047AT (47)	#955-010-402AT (402)	NA
70 long action and H&H mags above #1,896,426	NA	NA	#955-010-096AT (96)
70 Target, H&H mags up to #1,896,476	#955-010-049AT (49A)	#955-010-046AT (46)	NA

WINCHESTER continued next column

RIFLE MODEL	STK# REAR	STK# FRONT	STK# 1-PC/SET
70 Target up to #1,896,476 F/ext	#955-010-049AT (49A)	#955-010-402AT (402)	NA
70 WSSM	#955-000-094AT (428)	#955-010-046AT (46)	NA
03, 63	#955-010-019AT (19)	#955-010-022AT (22)	NA
05, 07, 10, 95	#955-010-020AT (20A)	#955-010-017AT (17)	NA
06, 62, 62A, 90 Octagon barrel	#955-010-032AT (32)	#955-010-032AT (32)	NA
43	#955-010-018AT (18)	#955-010-018AT (18)	NA
47, 69A, 72	#955-010-012AT (12)	#955-010-017AT (17)	NA
52 hole spacing different	#955-010-025AT (25)	#955-010-057AT (57)	NA
52 hole spacing same	#955-010-046AT (46)	#955-010-046AT (46)	#955-000-123AT (46M, 46M)*
	#955-010-146AT (46M)	#955-010-146AT (46M)	#955-000-124AT (46S, 46S)*
	#955-012-046AT (46)	#955-012-046AT (46)	NA
52C	#955-010-085AT (85)	#955-010-085AT (85)	NA
57, 69	#955-010-012AT (12)	#955-010-013AT (13)	NA
60, 67, 68	#955-010-021AT (21)	#955-010-021AT (21)	NA
61 round barrel	#955-010-019AT (19)	#955-010-013AT (13)	NA
61 octagon barrel	#955-010-025AT (25)	#955-010-032AT (32)	NA
74	#955-010-012AT (12)	#955-010-012AT (12)	NA
75 Sporter	#955-010-015AT (15)	#955-010-030AT (30)	NA
75 Target	#955-010-015AT (15)	#955-010-016AT (16)	NA
77	#955-010-015AT (15)	#955-010-032AT (32)	NA
88, 100	NA	NA	#955-010-053AT (53)
94 Big Bore Angle Eject	#955-010-095AT (95)	#955-010-403AT (403)	NA
94 Angle Eject except earliest	#955-010-095AT (95)	#955-010-094AT (94)	#955-000-131AT (95M, 94M)*
670, 770	#955-010-047AT (47)	#955-010-046AT (46)	#955-000-125AT (47M, 46M)*
	#955-010-147AT (47M)	#955-010-146AT (46M)	NA
670, 770 F/ext.	#955-010-047AT (47)	#955-010-402AT (402)	NA
	#955-010-147AT (47M)	NA	NA
1300 Shotgun	NA	NA	#955-010-425AT (416M/54)
Super X Rifle	#955-010-054AT (54)	#955-010-054AT (54)	#955-000-127AT (54M, 54M)*
Small ring Mauser action	#955-010-055AT (55)	#955-010-046AT (46)	NA
<b>ZB</b>			
22	NA	#955-010-028AT (28)	NA
	NA	#955-010-024AT (24)	NA

## WEAVER TOP MOUNT BASE PRICES

— Advise # —	11, 12, 13, 17, 21, 22, 23, 24, 28, 29, 30, 42, 43, 44, 71A, 84, 91, 402, 402M Base, 5E4M61	\$ 4.99
— Advise # —	14, 27	

**WEAVER WINDAGE ADJUSTABLE SURE-GRIP RINGS**



Completely Adjustable, High-Strength Clamping Power

High-quality, windage adjustable rings feature steel caps with two hardened screws per side allow super strong clamping power and positive grip on your scopes. Both front and rear rings come with two fully adjustable base clamps that mount securely to Weaver-style rails with a unique, one-piece lug milled into the base of each ring. Clamps can be tightened or loosened for both front and rear alignment so you can line your scope up perfectly with the end of the barrel leaving the windage adjustment in your scope for precise sighting-in.

**SPECS:** Aluminum lower; steel cap, 4 screws, windage adjustment clamps. Allen wrench included. Black, gloss or matte finish. 1" (2.5cm) diameter. Heights measured from top of base to bottom of ring. Med., .180" (.5cm); High, .350" (.8cm); X-High, .575" (1.5cm).

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-000-111AT	Med.	Gloss Blk	1"	5E27M92 \$ 29.99
#955-000-112AT	Med.	Matte	1"	5E27K92 \$ 29.99
#955-000-113AT	High	Gloss Blk	1"	5E27D92 \$ 29.99
#955-000-114AT	High	Matte	1"	5E27M92 \$ 29.99
#955-000-115AT	X-High	Gloss Blk	1"	5E27E92 \$ 29.99
#955-000-116AT	X-High	Matte	1"	5E27Q92 \$ 29.99

**WINDAGE ADJUSTABLE GRAND SLAM RINGS** - Strong, all-steel rings clamp securely to Weaver-style rails and two Torx® screws hold your scope rigidly in place. Windage adjustable ring bases allow for increased left to right positioning on front and rear alignment of rings and scopes while leaving the windage adjustment on the scope for accurate fine-tuning at the range. Rings also allow for perfect return to zero when remounting scopes.

**SPECS:** Steel, blued, matte finish. 1" (2.5cm) diameter. Heights measured from top of base to bottom of ring. Med., .180" (.5cm); High, .350" (.8cm); X-High, .575" (1.5cm). Torx wrench included.

#955-000-099AT	Rings, Medium, 1", Matte Blue, 5E32G63	\$ 35.99
#955-000-100AT	Rings, High, 1", Matte Blue, 5E32G63	35.99
#955-000-101AT	Rings, X-High, 1", Matte Blue, 5E32Q63	35.99

**WEAVER SURE-GRIP RINGS**

Give Uniform High-Strength Clamping Power



Steel caps with two screws per side provide extra strong, 4-screw, clamping power. Helps ensure that reticle stays square while tightening top screws. Large clamp nut locks rings to base, provides easy scope installation, removal; and accurate return to zero after re-installation.

**SPECS:** Aluminum lower; steel cap, screws, crossbolt and nut. Black, gloss or matte finish. Heights (above base): 1" (2.5cm) diameter - Med., .164" (4.16mm); High, .332" (8.43mm); X-High, .560" (14.2mm).

STOCK #	HEIGHT	FINISH	SIZE	PRICE
#955-000-007AT	Med.	Gloss	1"	5E25G87 \$ 27.99
#955-000-008AT	Med.	Matte	1"	5E25N87 \$ 27.99
#955-000-009AT	High	Gloss	1"	5E25A87 \$ 27.99
#955-000-010AT	High	Matte	1"	5E25Q87 \$ 27.99
#955-000-011AT	X-High	Gloss	1"	5E25I87 \$ 27.99
#955-000-012AT	X-High	Matte	1"	5E25L87 \$ 27.99

**WEAVER SEE-THRU MOUNTS**



Integral Mount Lets You Use Both Iron Sight & Scope

Wide oval opening below the scope allows fast, unrestricted use of iron sights when you're too close to use a scope. All-steel, four screw top strap gives 210° surface contact for recoil-proof strength. Integral aluminum base means lighter weight. Front and rear mounts interchange for greater eye relief.

**SPECS:** Aluminum lower half, steel top straps and screws. Satin blue finish. 1" (2.5cm) I.D. Overall height approx. 2" (5.1cm). 3 oz. (85 g) wt. per pair.

STOCK #	FITS	PRICE
#955-401-713AT	Marlin 336	5E14Q15 \$ 15.99
#955-401-712AT	Rem. 700	5E14I15 \$ 15.99
#955-401-714AT	Rem. 4, 6, 7400, 7600	5E14H15 \$ 15.99

**SCOPE BASE SHIMS**

Achieve Perfect Scope Base & Ring Alignment



Three thicknesses down to an incredible .001", so front-to-rear base heights can be made absolutely perfect. **SPECS:** Steel. All are .625" (15.9mm) wide. Package contains 7 shims: (4) .010" (.254mm); (1) .005" (.127mm); and (2) .001" (.0254mm) thick shims. .560"-.600" - .201" (5.1mm) diameter holes. Fits .560" (14.2mm) to .600" (15.2mm) hole spacings. .860"-.153" (3.9mm) diameter holes. Fits .860" (21.8mm) hole spacings.

#396-100-505AT	.560"-.600" Shims, 6C7A25	\$ 7.99
#396-100-860AT	.860" Shims, 6C7A24	7.99

**WILCOX INDUSTRIES COMP-M MOUNT**

Strong, Lightweight, Tactical Mount For Secure Attachment Of Comp Series Sights



Compact tactical mount securely positions an Aimpoint red dot optic the correct height above a flattop receiver rail. Fits Aimpoint CompC3/M2/ML2/M3/ML3 series, 3XMAG magnifier, and other optics with 30mm tube that require single-ring mounting. Skeletonized construction provides full support without the weight of excess metal for an exceptionally strong, solid, yet lightweight mount. Four, steel, hex-head cap screws anchor the top ring half to the mount to ensure full contact with sight body to prevent slippage. Rail Grabber clamping system secures the mount to receiver and maintains sight alignment even under the battering of sustained rapid fire. Unique, captive cross-bolt is divided lengthwise; one side provides a slop-free fit in a MIL-STD 1913 Picatinny slot, while rotating the bolt a half turn exposes the side that snugs into the narrower Weaver-type slot. An oversized thumb nut with deep grasping grooves lets the operator tighten the mount with hand pressure only; coin slot in the head lets you apply additional tightening force with a U.S. nickel or quarter. **SPECS:** Aluminum, hardcoat anodized, matte black finish. Height measured from top of rail to bottom of scope tube: 1.120" (2.84cm). 3.1 oz. (88g) weight. Fits Aimpoint CompC3/M2/ML2/M3/ML3, 3XMAG magnifier, and other optics that require a single 30mm ring mount.

#100-004-257AT	Comp-M Mount, 4B129M99	\$ 129.99
----------------	------------------------	-----------

**JP ENTERPRISES AR-15/M16 45° OFFSET ADAPTER**



Accepts Tactical Sights & Micro-Red Dots For Fast Targeting

Machined aluminum mount allows simple, no-gunsmith mounting of iron or micro red dot sights at a 45° position in line with your rifle's bore. Helps improve your short-range speed-shooting without changing your optics. The offset position keeps your tactical sights from interfering with your main optic but keeps them easily accessible by simply tilting your rifle to the side without changing your head position. Mount attaches easily to all Picatinny rails on rifle receiver or handguard. Fully reversible for right- or left-handed shooters. **SPECS:** 6061 aluminum, hard anodized coating, black. 1 1/4" (3.1cm) long, 1 1/4" (4.4cm) wide, 7.7 oz. (209g) wt. Fits MIL-STD 1913 Picatinny rails only.

#100-008-905AT	JP 45° Offset Adapter, 2E54I04	\$ 56.95
----------------	--------------------------------	----------

**WILLIAMS SIDE MOUNT & RINGS**

Solve Difficult Scope Mounting Problems



Adjustable mounts attach to the side of the receiver. Exclusive, eccentric base bushing allows the rear ring to be centered for maximum windage adjustment. Aluminum construction, black anodized, bright finish. **SM-70** base fits centerfire rifles with left-hand receiver wall radius, including Mauser 91, 93, 94, 95, 96, 98, Must use Shim Pack with mount, sold separately below. Rem. 600, 660, 700, 721, 722, 7; Savage 110, 111; Win. 54, 70, 670, 770; Wthby MK-V, Vanguard, British SMLE #1 (Round Receiver) Must use Lee-Enfield #1 Mounting Plate with mount, sold separately below. BSA Majestic, Monarch, CF-2; Husqvarna Crown Grade; Interarms Mark X, Howa 1500, 1700; Japanese M38 (6.5), M99 (7.7)\*; Mossberg 800, 3000; P14/17 Enfield\*; Swiss 1911 (7.5); U.S. Military 1903/1903A3. **SM-71** base fits most lever and bolt action rifles with a flat, left-hand receiver wall, including Remington 30A, 36, 336, 93, 44, 444, 1895; British SMLE #4, 5 (Flat Receiver); Remington 14, 141; Russian 1891 (7.62); Winchester 71, 86, 92, 94 (with FP or 5D sight), 95. **QC Split Rings - 1"** (2.5cm) dia. Positions scope to the left of the centerline of the bore. **QC HCO Rings - 1"** dia. High. **HCO** and **High Split Rings** have longer stud and .200" thick sub-ring base to accommodate large objective scopes. Positions the scope directly over the centerline of the bore.

#962-070-070AT	SM-70 Side Mount Base, 2F42N88	\$ 46.99
#962-070-071AT	SM-71 Side Mount Base, 2F42B88	46.99
#962-070-100AT	Shim Pack, 2F6K04	6.99
#962-070-101AT	QC Split Rings, 2F23J58	25.99
#962-070-102AT	QC HCO Rings, 2F29E12	31.99
#962-070-103AT	QC High Split Rings, 2F24A59	26.99
#962-070-104AT	QC High HCO Rings, 2F33D33	36.99

\*Must use Lee-Enfield #1 Mounting Plate with mount. \*\*Must use Shim Pack with mount.

**ATLAS METAL PRODUCTS PICATINNY BASE STOCK**



Create Custom Accessory & Optics Bases For Tactical & Sporting Applications

Six inch and twelve inch long, aluminum stock has a wide, flat



**SAMSON MANUFACTURING CORP. QUICK-FLIP MOUNT FOR AIMPOINT 3XMAG**



Flips Magnifier Aside For Instant Transition From Long-Range To Close-Range Targeting

Quick-transition mount combines secure, correct-height attachment of an Aimpoint 3XMAG behind a compatible red dot sight with a spring-loaded mechanism that flips the magnifier aside for instant return to unmagnified operation of sight. Lets you shift from long-range to short-range targeting almost instantly. Securely installed to any MIL-STD 1913 Picatinny receiver rail with a robust locking bar and bolt system, so the magnifier stays correctly positioned behind the sight. Mount bolts directly to the factory holes in the bottom of the 3XMAG (machine screws included)—no gunsmithing required. Lever can be installed so flip path is on left or right side. Quick-flip tab has deep grooves for easy activation with a flick of your thumb.

**SPECS:** Aluminum, hardcoat anodized, matte black. #100-004-239AT Quick-Flip Mount w/Bolt-On Base, 1B162H12. \$ 169.99

**BROWNELLS SCOPE SHIM KIT**

Have The Right Shim, Right At Your Fingertips



An economical and practical kit that provides a complete selection of scope shims. When "just a little more" height is needed for perfect scope base and ring alignment. **SPECS:** Steel, blued. Kit contains 10 of each hole spacing and thickness (80 total). Available in .600" (15.2mm) and .860" (21.8mm) c-to-c hole spacing and .006" (.152mm), .008" (.203mm), .010" (.254mm), .012" (.304mm) thickness. Refills sold 10 per pak.


#080-814-000AT	Scope Shim Kit, 8K81M49	\$ 89.99
----------------	-------------------------	----------

STOCK #	SIZE	STOCK #	SIZE
#080-814-606AT	.600" x .006"	#080-814-806AT	.860" x .006"
#080-814-608AT	.600" x .008"	#080-814-808AT	.860" x .008"
#080-814-610AT	.600" x .010"	#080-814-810AT	.860" x .010"
#080-814-612AT	.600" x .012"	#080-814-812AT	.860" x .012"

— Advise # — Shim Refill Pak, 8K10D19. \$ 10.99

## BROWNELLS STEEL SHIM STOCK

Solves Most "Need A Little More Metal" Problems

For scope base adjustment, sight adjustment, head-space adjustment and checking, restoration of misaligned parts oldering on for buildup, inletting templates, spacers. You name it, and somewhere along the line a shim can be used for everything from shimming, to measuring, to fixing! 

**KIT NO. AC-24** - consists of one piece, each, steel shim stock, 2 1/2" x 6" in the following thicknesses: .001" .002" .003" .005" .010" .015"

**#080-544-024AT AC-24 Steel Shim Stk Kit, 8K14P85 ... \$ 19.99**


**KIT NO. AF-12** - consists of one piece, each, steel shim stock, 6" x 12" in the following thicknesses: .001" .0015" .002" .003" .004" .005" .006" .007" .008" .010" .012" .015"

**#080-544-012AT AF-12 Steel Shim Stk Kit, 5A53N99... \$ 62.99**

## MOUNTING SOLUTIONS PICATINNY RAIL BLANK



For Custom Mounting Of Accessories & Optics

CNC machined to true Picatinny dimensions, these cut-to-length blanks provide unlimited accessory or scope mounting options for custom applications. Bases are left undrilled for fitting to guns with non-standard hole spacing or those needing special ring positioning. Precision cross-slots easily accept Picatinny or Weaver-style accessories and scope rings. Open top design reduces weight without sacrificing strength. Available in 5 1/2", 9", and 18" lengths. 

**SPECS:** 6061 T6 aluminum, natural, matte finish. 5 1/2" (14.3cm), 9" (22.8cm), or 18" (45.7cm) long. .206" (10mm) slot width, 3/16" (1.59cm) high from top of receiver to bottom of dovetail. Mounting holes not drilled.

**#100-003-790AT 5 1/2" Rail Blank, 1K25N65 ... \$ 29.95**


**#100-003-789AT 9" Rail Blank, 1K40H06 ... 49.95**

**#100-003-788AT 18" Rail Blank, 1K69A28 ... 79.99**

## BROWNELLS DELTRIN® RING REDUCERS

Make Big Rings Accept Small Scopes



Non-marring, Delrin sleeves surround scopes to adapt them to fit bigger-diameter rings. Black, matte finish won't clash with your scope or gun. Reducers are sliced in half for easy, dropon installation onto virtually any brand of rings in the sizes listed below. Sold as front-and-rear-ring sets. 

**SPECS:** Kit includes front and rear reducer sets. Delrin, matte, black finish.

**#084-000-091AT 30mm To 1" Ring Rdcrs, 4H13D04... \$ 14.99**


**#084-000-092AT 1" To 7/8" Ring Reducers, 4H13C04... 14.99**

**#084-000-093AT 1" To 3/4" Ring Reducers, 4H13N06... 14.99**

**#084-000-094AT 30mm To 26mm Reducers, 4H12L97... 14.99**

## POWER CUSTOM BLANK SCOPE RING BASE STOCK

Weaver-Style Or Picatinny Profile; Ready To Machine For Custom Installations

Blank aluminum stock has a milled center channel for lighter weight without reducing strength. Just cut to required length, mill the cross slots, radius the underside (if needed) and drill the mounting holes. Plenty of thickness allows machining to fit most revolver top straps and receivers. Available in Weaver or Picatinny profiles. 

**#713-065-009AT 9" Weaver Scope Ring Base Stock, 3A11Q16... \$ 11.99**

**#713-065-018AT 18" Weaver Scope Ring Base Stock, 3A20H62... 21.99**


**#713-000-113AT 9" Picatinny Scope Ring Base, 3A11E90... 12.99**

**#713-000-112AT 18" Picatinny Scope Ring Base, 3A20H62... 21.99**

## EGW PICATINNY BASE STOCK



Build A Custom Base In Steel Or Aluminum; Pre-Cut Slots Speed The Job

Scope base stock is CNC machined to MIL STD 1913 Picatinny dimensions for fabricating custom rifle or handgun optic bases. Pre-cut cross-slots speed the job and allow use of any Picatinny scope rings. Ideal for quickly building a versatile base for a gun with non-standard hole spacing, rather than drilling new holes in the receiver. Available in pre-hardened steel or aluminum, both with a matte black finish. Bottom of the base is flat, so it can be radius cut to fit any receiver contour. 

**SPECS:** 4140 pre-hardened steel, blued, or 7075 T6 aluminum, hard-coat anodized, matte black. 7/16" (19.7cm) long, 1" (2.5cm) wide base, 3/16" (1.9cm) high.


**#296-000-144AT Steel Picatinny Rail Stock, 6B60J87... \$ 69.99**

**#296-000-145AT Aluminum Picatinny Rail Stock, 6B52H18... 59.99**

## EGW PICATINNY EXTRUSION

Build Custom Scope Bases; Saves Time & Money



Picatinny cross-section aluminum rail stock gives you a head start on building custom scope bases. Pre-contoured, so you need only cut to required length, mill cross-slots, radius the underside (if needed), and drill mounting holes. Much easier than machining from scratch from bar stock. Perfect for installations that require special ring positioning. Place cross-slots only where you need them; dovetail contour accepts Picatinny or Weaver-style rings. Channel down the center keeps weight to a minimum without compromising rigidity. 

**#296-000-098AT Picatinny Extrusion, 6B18H11... \$ 19.95**



# THE MOST POPULAR THERMAL AND DAY/NIGHT DIGITAL DEVICES ON THE MARKET



**X-Sight II HD Series**  
DAY&NIGHT SMART HD RIFLE SCOPES



**BinoX HD**  
DAY&NIGHT SMART HD BINOCULARS



**ThOR-HD Series**  
THERMAL SMART HD RIFLE SCOPES



**BinoX-THD Series**  
THERMAL SMART HD BINOCULARS



### NEW ACCESSORIES FOR ATN SMART HD FAMILY OF DEVICES FOR 2017



**LaserBallistics Series**  
Laser Rangefinders



**IR850 PRO**  
Long Range 850 mW  
Infra-Red Illuminator



**X-TRAC**  
Tactical Remote  
Access Control



**Extended Life Battery Kits**  
Battery Packs with Accessories

Orders/Tech: 800-741-0015